



KALLISTA® One™ Wall-mount Bridge Kitchen Faucet

INSTALLATION INSTRUCTIONS

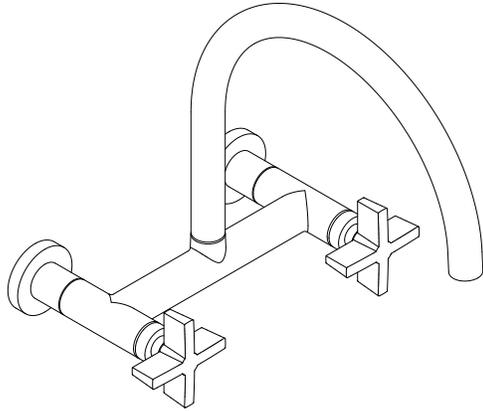

P25203-CR

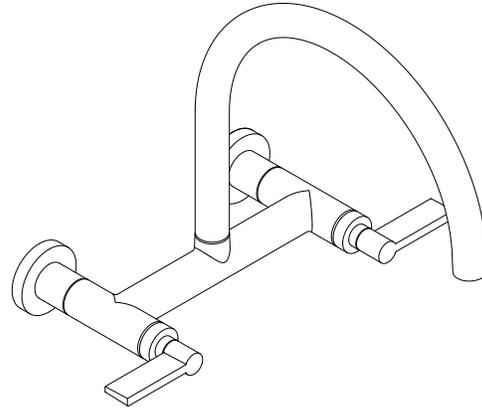

P25203-LV

KALLISTA One™ Wall-mount Bridge Kitchen Faucet

INSTALLATION INSTRUCTIONS

THANK YOU FOR CHOOSING KALLISTA

We appreciate your commitment to Kallista quality products. Please take a moment to review this manual before you install your Kallista product. If you encounter any installation or performance problems, please do not hesitate to contact us at the phone number listed at the bottom of the page.

BEFORE YOU BEGIN

NOTE: Use two-hole straps or drop-ear ells and screws to secure the water supplies within the wall.

- Observe all local plumbing and building codes.
- Shut off the main water supply.
- Carefully inspect waste and supply tubing for any sign of damage.
- Select pipe nipples long enough to protrude through the finished wall.
- Do not use petroleum based products on this product.
- Kallista reserves the right to make revisions in the design of products without notice, as specified in the Price Book.


TOOLS AND MATERIALS



Hex
Wrench




Tape
Measure



Level




Thread
Sealant



Square

Plus:


- Pipe Nipples
- Elbows
- Caps



Socket Wrench
W/Sockets



7/8" Open-End
Box Wrench




2x4 Lumber

KALLISTA One™ Wall-mount Bridge Kitchen Faucet

INSTALLATION INSTRUCTIONS

1. PREPARE THE SITE

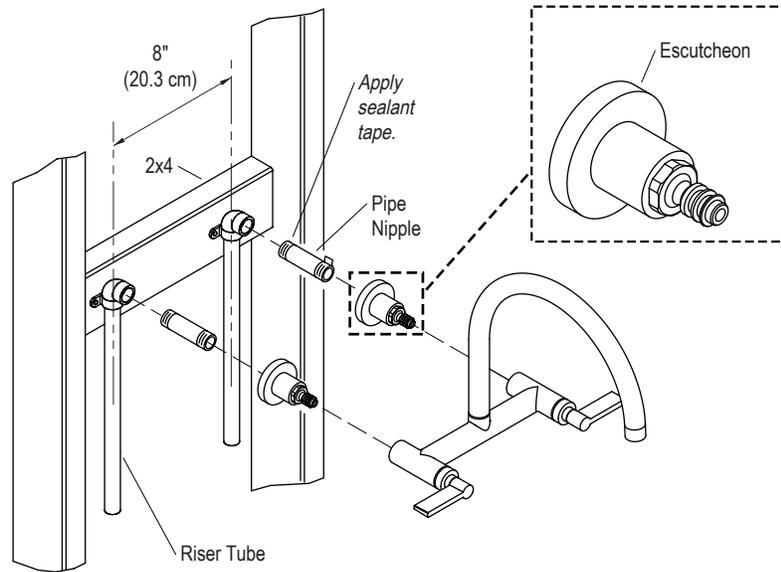

Rough-in the Plumbing

IMPORTANT! For exterior wall installations: Ensure proper wall insulation to prevent frozen pipes.

- Attach a 2x4 between two studs according to the illustration.
- Position the riser tubes 8" (20.3 cm) apart, then level, and secure the elbows and risers to the 2x4.
- Temporarily secure a pipe nipple to each elbow with sealant tape.
- Confirm the pipe nipples are perpendicular to the front edge of the vertical 2x4s.

Confirm the Rough-in Plumbing

- Hand tighten an escutcheon onto each pipe nipple.
- Slide the faucet assembly onto the escutcheons.
- Ensure the escutcheons are aligned and level with one another.
- Further tighten the escutcheons, if necessary.
- Verify the faucet assembly is properly aligned and level. If necessary, make adjustments by repositioning the elbows, or escutcheons.
- Remove the faucet assembly and escutcheons.


Site Checkout

- Flush the water lines.
- Cap the pipe nipples and check for leaks at the elbows.
- Complete the finished wall.

KALLISTA One™ Wall-mount Bridge Kitchen Faucet

INSTALLATION INSTRUCTIONS

2. INSTALL THE ESCUTCHEONS

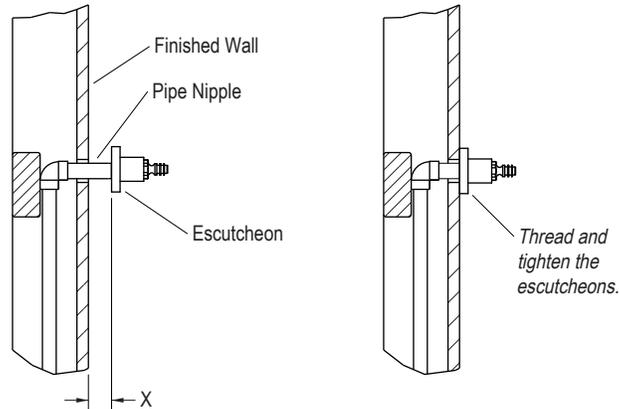

- Remove the caps from the pipe nipples.
- Reinstall the escutcheons to the pipe nipples.
- Measure and note the distance "X" from the end of the escutcheons to the finished wall.
- Remove the escutcheons.
- Remove the pipe nipples and measure their length.
- Subtract distance "X" from the length of the pipe nipples. Discard the pipe nipples and replace them with ones of proper length.
- Apply sealant tape to both ends of the pipe nipples, then insert the pipe nipples into the elbows.

IMPORTANT! If you are mounting the escutcheons to an uneven surface (such as tile grout lines), apply a suitable sealant to the backside of the escutcheons. Do not use petroleum based sealant.

- Thread the escutcheons onto the pipe nipples.


NOTE: Be careful not to damage the finish on the escutcheons when tightening.

- Tighten the escutcheons with a 7/8" deep socket or 7/8" open-end box wrench.
- Ensure the escutcheons are aligned and level with one another. Further tighten the escutcheons, if necessary.

KALLISTA One™ Wall-mount Bridge Kitchen Faucet

INSTALLATION INSTRUCTIONS

3. INSTALL THE FAUCET

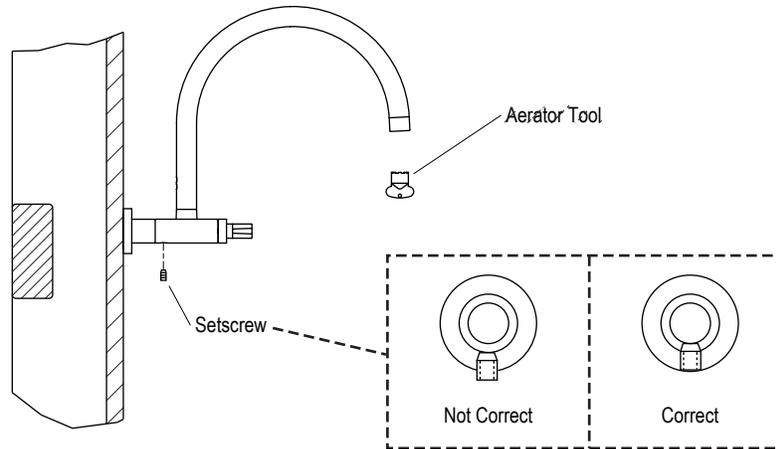

IMPORTANT! Be careful not to damage the O-rings on the escutcheons during this procedure. The O-rings are pre-installed in the escutcheons.

- Carefully slide the faucet assembly onto the escutcheons.
- Using a 1/8" hex wrench, secure the faucet assembly to the escutcheons with setscrews. The setscrew must be flush or recessed.

NOTE: If the setscrews are not flush: Loosen the setscrews, then remove the faucet assembly from the escutcheons. Reinsert the faucet assembly, then retighten the setscrews.

4. INSTALLATION CHECKOUT

- Turn both handles clockwise to the OFF position.
- Verify that all connections are tight.
- Turn on the main water supply.
- Check all connections for leaks. Repair as needed.
- Turn both handles to the ON position to run water through the faucet. Allow the water to run through the spout to remove any debris.
- Turn both handles to the OFF position.

NOTE: If water flow is restricted: Using the aerator tool (provided), turn the aerator clockwise to remove it from the spout, remove the debris, then reinstall the aerator. Retain the aerator tool for future use.