

# Installation Guide

## Two-Piece Toilets

P70150, P70200, P70270,  
P70370, P70380

KALLISTA.

1080643-2-C

## Thank You For Choosing Kallista

We appreciate your commitment to KALLISTA quality products. Please take a moment to review this manual before you install your KALLISTA product. If you encounter any installation or performance problems, please do not hesitate to contact us at the phone number listed on the back cover.

### Important Information



**CAUTION: Risk of personal injury.** Hazardous gases may leak from the flange opening if it is not blocked. If the new toilet is not installed immediately, temporarily place a rag in the flange opening.




**WARNING: Risk of product damage.** Do not use in-tank cleaners in your toilet. Products containing chlorine (calcium hypochlorite) can seriously damage fittings in the tank. This damage can cause leakage and property damage.


**IMPORTANT!** Do not lift or rock the bowl after placement. If you break the watertight seal, you must install a new wax seal.

**NOTE:** For additional servicing and service parts information, lift the lid and consult the label located on the underside of the lid or call the numbers listed on the back page of these instructions.


Kallista reserves the right to make revisions in the design of products without notice, as specified in the Price Book.

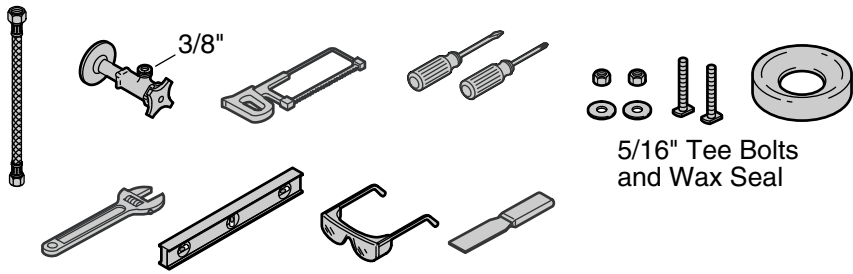


**1** If replacing a toilet, remove the old wax.




**2**




**3**



**4** Apply weight evenly. Do not move after placement! Watertight seal may be broken!




**5** Do not overtighten!




Place this side up.



**6** Cut the excess.




**7**




## Installation


**8** Slide a rubber washer onto each tank bolt and insert the tank bolts. Place a gasket on the bottom of the flush valve, between the tank and the bowl. Position the tank on the bowl. Assemble a steel washer and a nut to each tank bolt. Level and secure the tank. **Do not overtighten!**

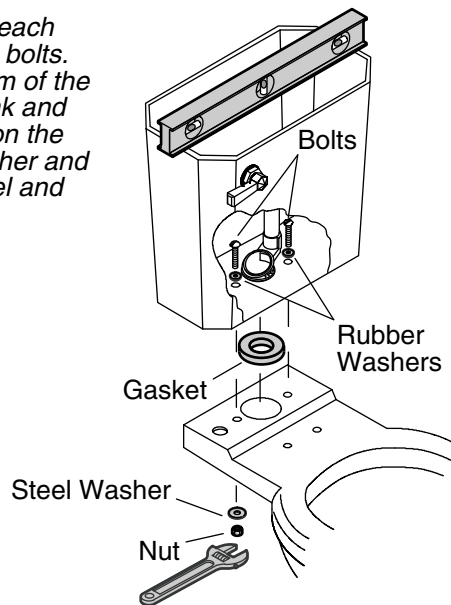


**9** Connect the supply and turn on the water. **Do not overtighten!**

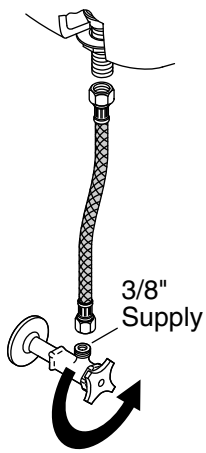


**10** Flush several times and check for leaks.



**11** Turn here to adjust the water level.

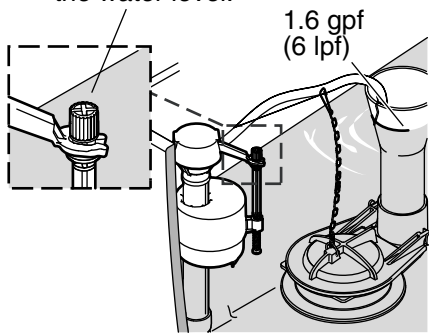

**12** Install the tank lid and the seat.



## Installation

## Troubleshooting Guide

Symptoms	Recommended Action
1. Poor flush.	<p>A. Adjust the tank water level to match the waterline.</p> <p>B. Fully open the water supply shut-off valve.</p> <p>C. Clear obstructions from the trapway, jet, or bowl rim holes.</p> <p>D. Clear obstructions from the waste line.</p>
2. No flush.	<p>A. Reconnect the chain to the trip lever or flush valve.</p> <p>B. Adjust the chain assembly to remove excessive slack.</p>
3. The fill valve turns on/off by itself without the toilet being flushed, or it runs, allowing water to enter the tank.	<p>A. Adjust the chain for proper slack so the flapper closes.</p> <p>B. Clean or replace the flapper if it is worn, dirty, or misaligned with the flush valve seat.</p> <p>C. Clean the area around the flush valve seat to allow the flapper to seal.</p> <p>D. Adjust the trip arm bracket and flange so they are parallel with the tank lid.</p> <p>E. Adjust the tank water level if it is too high.</p> <p>F. Replace the fill valve if the valve float sinks.</p>
4. Tank takes excessive time to fill.	<p>A. Fully open the water supply shut-off valve.</p> <p>B. Clean the valve inlet, valve head, or supply line. Flush the lines.</p>
5. There is excessive noise when the tank is filling.	<p>A. Partially close the water supply shut-off valve if the water pressure to the toilet is too high. Check the toilet performance following any such adjustment.</p> <p>B. Remove dirt or obstructions from the valve head. Flush the lines.</p>
6. Trip arm strikes the tank lid underside.	<p>A. Adjust the chain assembly to remove excessive slack.</p>

1080643-2-C

1080643-2-C

USA/Canada: 1-888-4-KALLISTA

Fax: 1-888-272-3094

[kallista.com](http://kallista.com)

KALLISTA<sup>®</sup>

©2013 KALLISTA

1080643-2-C