


23485T-4 Wall Mount Lavatory Faucet(Short Spout)  
 22567T-4 Wall Mount Lavatory Faucet(Long Spout)

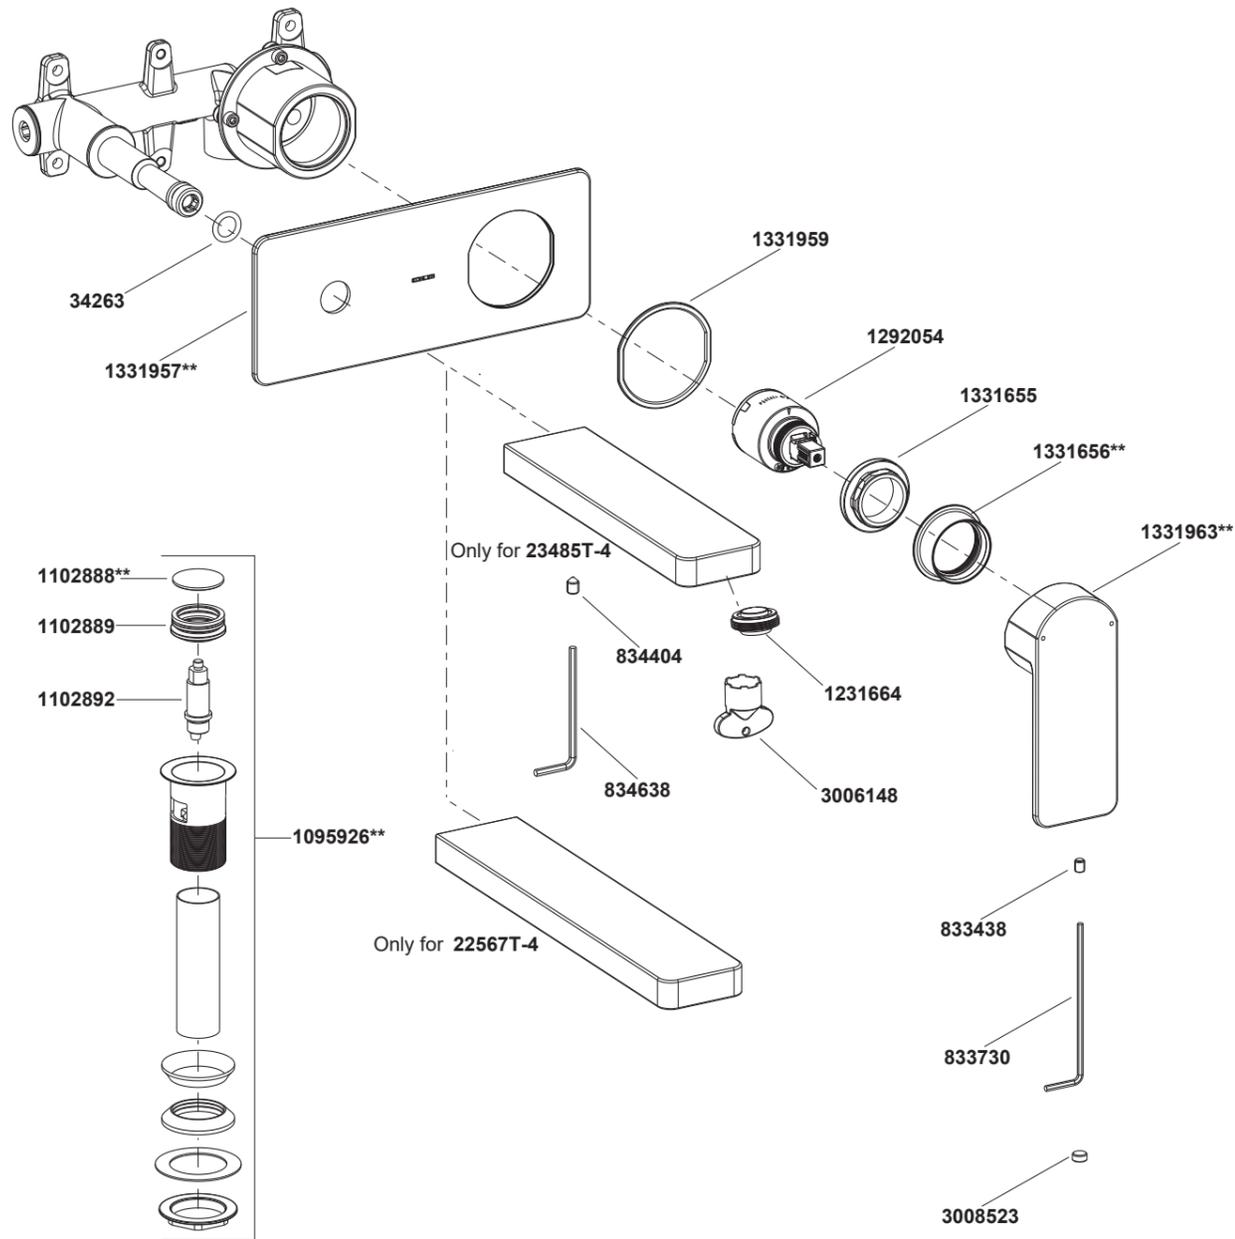

\*\*Color code must be specified when ordering.  
**NOTE:** For all Asia pacific regions (excluding China) add SP (SPxxxxxx\*\*) in front of the part number when ordering.

23485T-4 Wall Mount Lavatory Faucet(Short Spout)  
 22567T-4 Wall Mount Lavatory Faucet(Long Spout)

### BEFORE YOU BEGIN

All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave these instructions for the consumer. They contain important information.

### NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. Inspect the supply tubing for damage and leakage. Replace and maintain as necessary.
3. Observe local plumbing codes.
4. Check for leaks before covering the pipes, repair as needed.
5. Please ensure only apply water pressure test on the product, and empty the air in pipe and faucet thoroughly before the test. Please ensure test pressure below 0.8MPa and test duration within 30 minutes.


### HANDLE OPERATION

Lift handle gently. Turn clockwise for hot water, counter-clockwise for cold water.


### STANDARD APPLICABLE

Special model meets or exceeds the following at date of manufacture: TIS

### ROUGH-IN DIMENSIONS

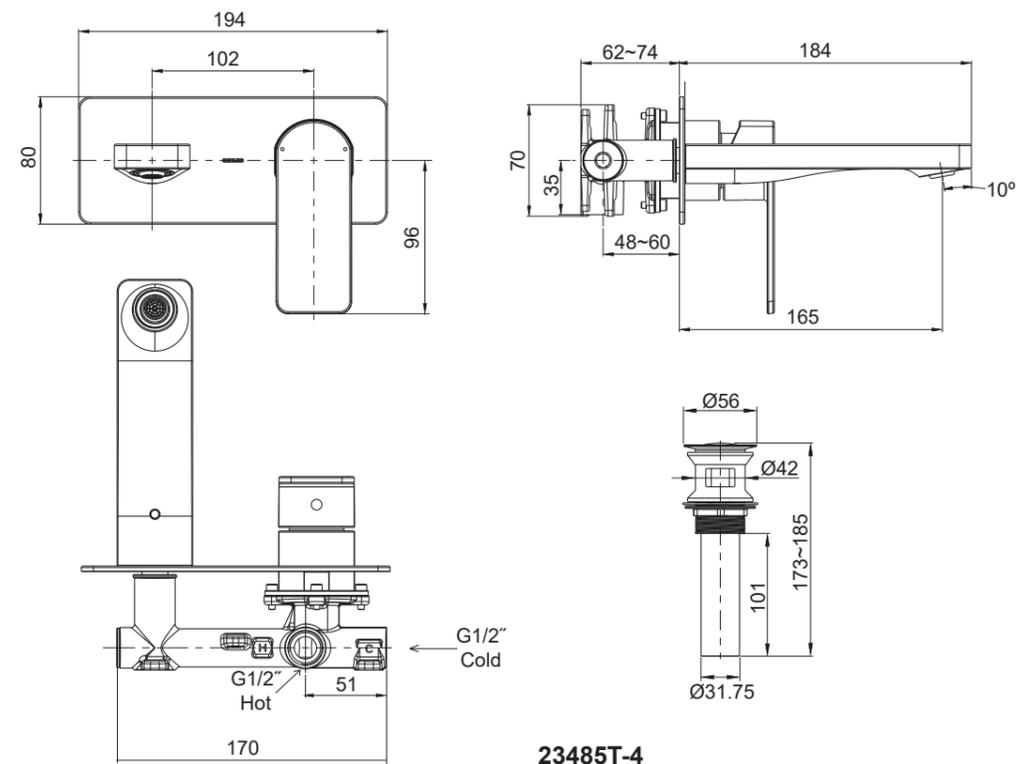


23485T-4

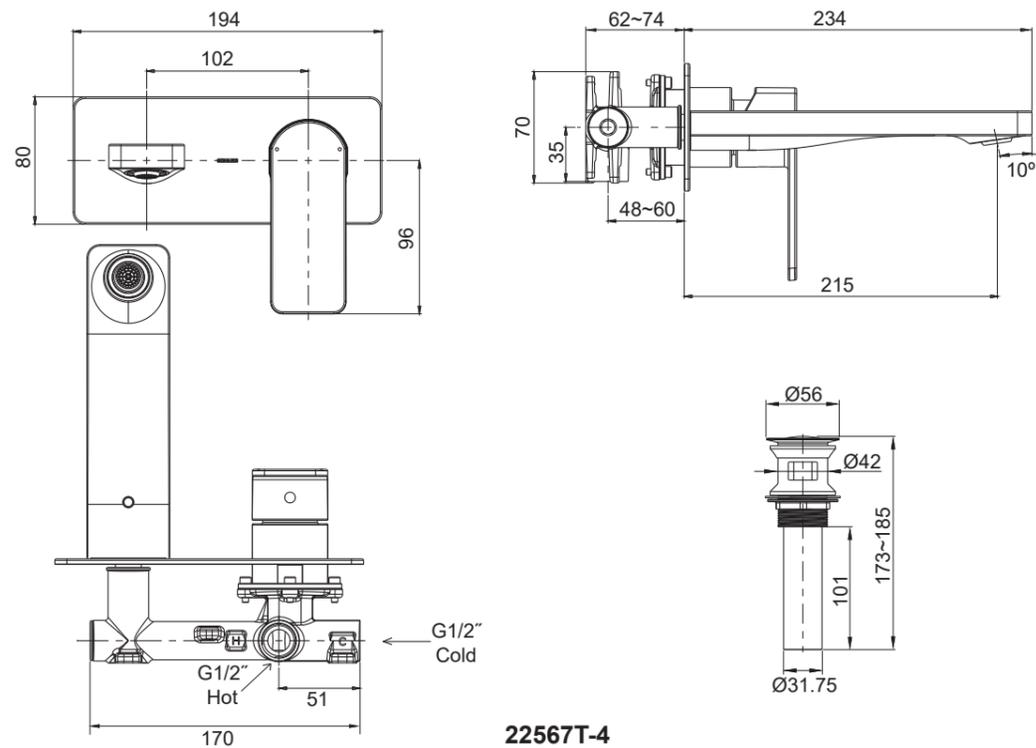

22567T-4

## INSTALLATION

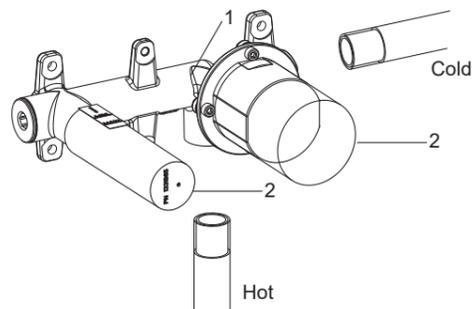

### How to Install the Body


Determine where the valve body(1) will be located on the wall. Make a suitable hole to install the valve body. Be sure the protectors(2) face front and the inlet of the valve body with mark "C" is on the right.

**NOTE:** Ensure the centerline of valve is vertical to the wall.

Connect hot and cold supplies to the inlets of the valve body. Connect cold supply to the right inlet with mark "C". Connect hot supply to the bottom inlet with mark "H".

The outer surface of the finished wall should be between the MAX and MIN marks on the protectors.

During installation, the protectors remain on the valve body.

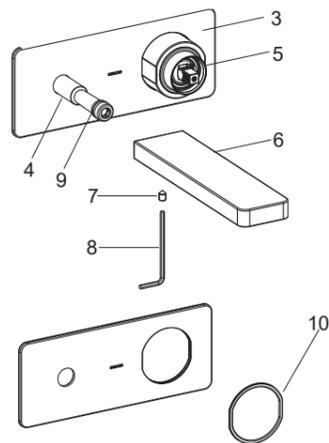


### How to Install the Handle and Spout

Remove the protectors after the wall is finished.

Apply plumbers putty at the backside of the faceplate(3). Install the faceplate over the connector(4) and valve base(5) until it is against the wall. Make sure the ring(10) is inserted in the faceplate, and do not squeeze it out.

Loosen the screw(7) in the spout kit(6) with hex wrench(8). Install the spout kit onto the connector(4) with its outlet downwards until it is against the faceplate. Wipe away any excess plumbers putty. Tighten the screw(7) with hex wrench to secure the spout.


**NOTE:** Don't damage the O-ring(9) on connector.

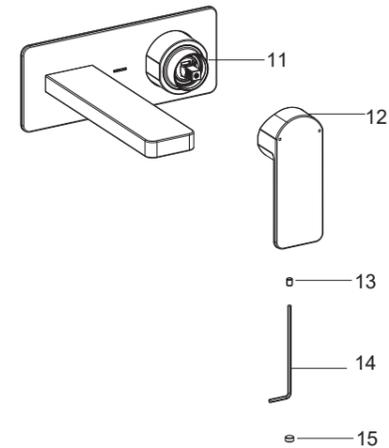

Turn off the valve, and loosen the screw(13) in the handle (12) with hex wrench(14). Install the handle onto the valve base(11) and keep it downward.

Tighten the screw with hex wrench and press the plug button(15) to the hole.

### How to Install the Drain

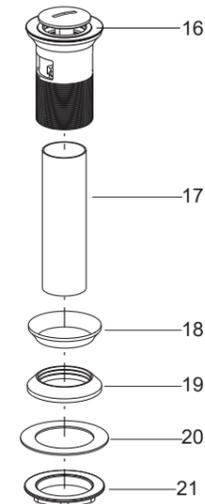


Remove the locknut(21), plastic washer(20), rubber gasket(19) and tailpiece(17) from the drain body. Supply enough tape or sealants to tailpiece thread. Reinstall the tailpiece.

Insert the drain body into the lavatory. Put the rubber gasket (Tapered side up), plastic washer and locknut back to the drain body in turn. Tighten the locknut.

**NOTE:** Do not reposition the drain after the locknut is tightened, or you may break the putty or sealants seal.

**NOTE:** If needed, apply a ring of plumbers putty or other sealants around the underside of the drain flange(16), instead of using rubber washer(18).

## INSTALLATION CHECKOUT

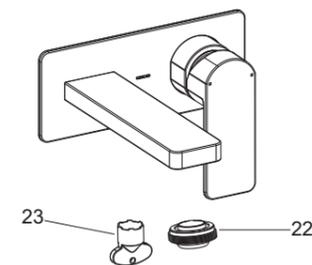

Ensure that all coupling nuts are tight. Ensure that the lever handle is in the off position. Turn on the main water supply and drain, and check for leaks. Repair as needed.

Remove the aerator kit(22) by tool(23). Run hot and cold water through faucet about one minute to remove any debris. Remove any debris from the aerator. Shut off the faucet. Reinstall the aerator.

## CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc, which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.