

The Perfect Blend of Design Excellence and Performance



PROJECT CATALOGUE

Traditional & Contemporary Faucets, Shower Products, Sensor Faucet, Bathroom Accessories and Kitchen Faucets









A Legacy in The Making











Since 1873_™



KOHLER®

Welcome to Kohler Company. Born in the USA over 145 years ago, we are a global leader in the kitchen & bathroom industry.

We are present on all continents with 50 manufacturing facilities, 30,000 staff and thousands of patents to our name. Four design centers on three continents with designers from various countries and backgrounds help us to be truly global while respecting local tastes and preferences.

Kohler Co. sets the standards of excellence and pushes the limits of design throughout the world. Whether we are creating kitchen and bath products, tile and furniture collections, engines and generators or luxury hotels and resorts to championship golf courses, our work is born from a desire to design experiences that make the world more gracious.

Over the years we have created and acquired an impressive portfolio of brand of which a few are presented in this brochure.





CONTENTS

Historic Milestones	6	Shower Arms	188
Bathroom Faucets	8	Handshower	192
Kohler Finish	12	DTV Mode	202
Bathroom Faucets		Modulo Valve System	204
Traditional		Recessed Valve Trim	205
Artifacts	17	40mm. Recessed Valve Trim	216
Fairfax	21	35mm. Recessed Mixing Valve with Ti	rim 218
Finial	25	Cold Water Shower Valve	222
Kelston	26	Hygiene Spray	230
Memoirs	30	Stop Valve	232
Occasion	35	Shower Hose	235
Contemporary		Bath Spout	236
Accliv	39	Deck-Mount Diverters	237
Aleo	44	Wall-Mount Connection	238
Atom	51	Bracket	240
Avid	54	Slide Bar	242
Beam	58	Bottle Trap	245
Beitou	59	Drain	246
Components	65	Supply Hose	249
Composed	76	Bathroom Accessories	
Honesty	81	Traditional	
July	86	Artifacts	252
Kumin	90	Capilano	254
Loure	95	Coralais	256
Parallel	98	Devonshire	259
Singulier	104	Fairfax	261
Stance	106	Memoirs Stately	263
Strayt	107	Occasion	265
Taut	112	Contemporary	
Taut with Pin Handle	118	Components	268
Sensor Faucets	122	Avid	271
Soap Dispenser	128	Cursiva	274
Urinal Sensor	130	Eolia	275
Shower Products	134	July	277
Anthem Valve & Control	135	Kumin	280
Statement Showering Collection	142	Loure	282
Statement Handshower with WaterMin	d 144	Setra	283
Thermostatic Shower Column	152	Singulier	284
Thermostatic Wall-Mount	156	Square	286
Shower Column	159	Stages	288
Wall-Mount	166	Strayt	292
Overhead Shower	176	Kitchen Faucets	294
Showerhead with Arm	185		

KOHLER® Historic Milestones

The story of Kohler Since 1873, Kohler Co. has been improving the level of gracious living by providing exceptional products and services for our customers' homes and their lifestyles. We believe better business and a better world go hand-in-hand. Fueled by the passion of more than 36,000 associates worldwide, we strive to enhance the quality of life for current and future generations through design, craftsmanship and innovation.

1883

World's First Cast Iron Bathtub

Pioneering advancement by Kohler sees first- ever 'manger' cast iron bathtub.





1967 The Bold Look of Kohler

Advertising Manager Armond "Bud" Grube, along with Charles Pagnucco and Alfred Ellrodt, developed the concept of boldly colored products under the tagline THE BOLD LOOK OF KOHLER®.



1985

Introduction of Artist Editions

The juice glasses we use every morning to the sideboard that holds our table linens, the objects we choose for our homes reflect who we are and narrate the rhythm and texture of our lives. Balancing artistry and craftsmanship with utility, Artist Editions products invite you to celebrate beauty and creativity each day.



Kohler Co. acquires Karat, which makes vitreous china products in Thailand for customers worldwide.



2008 Kohler with WaterSense® Award

since 2008.

The U.S. Environmental Protection Agency presents Kohler with its first watersense® award. Kohler has received every year





2011 **Kohler Most Advanced Toilet** Numi Intelligent Toilet is launched in Asia

and worldwide.



2012 Celebrate 10 Years **Kohler Thailand**

Celebrating the 10th anniversary of Kohler

2013

Kohler Celebrates 140th Anniversary

Kohler Co. celebrates 140 years of cutting-edge design and innovations



2014 **Kelston Series Debuts, Luxury Collection**

A combination of classic and modern design. Living on the edge of design and technology.





2015 Global Launch of Veil **Intelligent Toilet**

Veil Intelligent Toilet combines stunning good looks and state-of-the-art technology. Since its introduction it made waves around the world and is a big hit with designers, architects and consumers alike.



2016 Avid and Composed **Faucet Series**

Classical and modern design are elevated to a new height of innovation and refinement.

2017 The first KEC opened in New York City

Kohler Co. reinvents its approach to global retail with the launch of Kohler Experience Centers. Created to serve the fast-growing segment of design professionals working on projects around the world and to offer consumers on-site product immersion, the new retail concept will make it easier than ever to experience and buy KOHLER products.



2018 We've partnered with **Manchester United**

Together, Kohler and Manchester United will promote a culture of equality and inclusion as we strive to make the world a better place for all.





2021 **Kohler Revolution 360 Extraordinary Flushing** Performance

Kohler upgrades your toilet performance with the introduction of the new Revolution 360 swirl flush technology, ensuring a powerful flush and a cleaner bowl.



2022

The Statement Showering **Collection with Anthem Controls and Valves**

At Kohler, we believe every shower is a canvas. And our Statement showering collection paired with Anthem valves and controls is the ultimate palette.



KOHLER brand.

Kohler Co. Celebrates 150 years of bold moves, creativity and impact while

Celebrating 150 Years shaping the next 150 years of its iconic

2023 Kohler WaterMind Technology

The Kohler New Statement Multifunction Handshower with WaterMind is no ordinary showerhead. With its pressure-sensing technology, this beauty adapts its spray system based on the water pressure it senses from the source.











Kohler Finish

Categories & Durability

Kohler faucets are designed, engineered and manufactured to the highest standards of quality and deliver a lifetime of uncompromised performance.

Polished Chrome

To create KOHLER's Chrome finish, two layers of nickel and one layer of Chrome are placed on top of the base material. Having two layers of nickel versus one creates a more durable finish.

Physical Vapor Deposition (PVD)

The majority of Kohler's finishes are created using this process. A leading finish techinque - using Chrome or Brushed Chrome as the base - through which the finish is molecularly bonded to the faucet.

Organic Finishes

For finishes that require a more organic look, one of the processes Kohler uses is powder coating. The process for this finishing technique is to place two layers of nickel on top of the base material, a powder spray and curing in the oven.

Industry Testing

Kohler carries out all industry-required testing, including salt-spray testing, to twice the standard to ensure our faucets stand the test of time.

Kohler Testing


Kohler also performs strict internal tests to ensure our finishes stand up to a variety of environmental factors such as harsh water conditions as well as common household cleaners.

Lifetime Limited Warranty*

All Kohler PVD finishes come with a Lifetime Limited Warranty. For detailed information on warranties, pleas contact the Kohler representative in your region.

*Warranty is dependent upon how and where the product is installed. Please contact your local Kohler representative for detailed warranty finformation in your market.



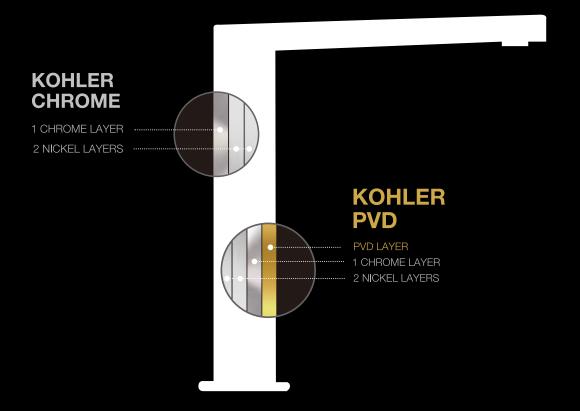

Vibrant™ PVD Finishes

Process

Physical Vapor Deposition (PVD) process provides KOHLER Faucets a rich luster that is highly resistant to scratches, tarnish and corrosion.

With a thickness of 0.5-1.0 microns, the PVD layer has the right thickness to ensure durability and avoid flaking over time.

The PVD process is employed to create all KOHLER vibrant finishes.

The PVD process is an eco-friendly process that does not generate any chemical waste.

KOHLER PVD finishes enjoy a Lifetime Limited Warranty.

Nickel Layers: Typically ranges from 10µm to 25µm Chrome Layer: Typically ranges from 0.25µm to 0.75µm PVD Layer: Typically ranges from 0.5µm to 1.0µm (µm = Micrometer)



STEP Substrate and material (brass, zinc, etc.) is formed to make the faucets.

S T E P

The material is finished by buffing, polishing and brushing.

STEP After the finishing process, the faucet is electroplated into a Polished Chrome or Brushed Chrome finish.


STEP

The PVD process occurs inside a vacuum that molecularly bonds the finish to the faucet for superior scratch and tarnis resistance.






rtifacts

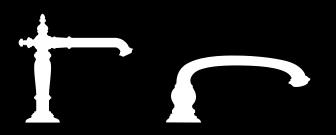

Combine a spout, handles and faucet finish to create a look all your own in two simple steps.







2. Choose your finish



Polished Chrome (-CP)



Vibrant Brushed Bronze (-BV)



Oil-Rubbed Bronze (-2BZ)

Artifacts™ **Bathroom Faucets**



K-72760T-CF with K-98068T-4-CP



K-72760T-BV with K-98068T-4-BV



K-72760T-2BZ with K-98068T-4-2BZ

Artifacts


Widespread Spout, Column

- Spout reach: 168 mm.
- Spout height: 135 mm.
- Brass construction.
- Laminar flow aerator for clean aesthetic and reduced splash.
- · Coordinate with your choice of Artifacts handles for a personalized design (Handles sold separately).
- Includes pop-up drain.


Artifacts

Lever handle

- · Solid metal construction.
- Leak-free 1/4 turn ceramic disc valve with lifetime warranty.
- Lever handle.

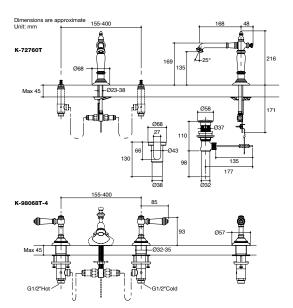

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-72760T-CP with K-98068T-9M-CP



K-72760T-BV with K-98068T-9M-BV



K-72760T-2BZ K-98068T-9M-2BZ

Artifacts


Widespread Spout, Column


- Spout reach: 168 mm.
- Spout height: 135 mm.
- Brass construction.
- Laminar flow aerator for clean aesthetic and reduced splash.
- Coordinate with your choice of Artifacts handles for a personalized design (Handles sold separately).
- Includes pop-up drain.

Artifacts

Swing Lever handle

- Solid metal construction.
- Leak-free 1/4 turn ceramic disc valve with lifetime warranty.
- Lever handle.

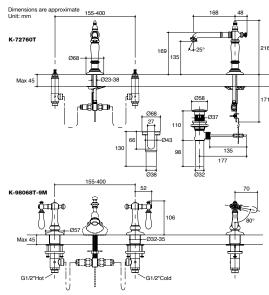



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-72778T-CP with K-98068T-4-CP



K-72778T-BV with K-98068T-4-BV



K-72778T-2BZ with K-98068T-4-2BZ

Artifacts


Deck-Mount Bath Spout, Arc


- Spout reach: 229 mm.
- Spout height: 74 mm.
- · Brass construction.
- Coordinate with your choice of Artifacts handles for a personalized design (Handles sold separately).


Artifacts

Lever handle

- Solid metal construction.
- Leak-free 1/4 turn ceramic disc valve with lifetime warranty.
- Lever handle.

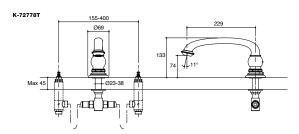

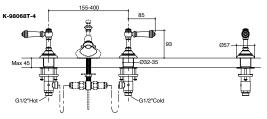



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-72778T-CP K-98068T-9M-CP



K-72778T-BV with K-98068T-9M-BV



K-72778T-2BZ with K-98068T-9M-2BZ

Artifacts

Deck-Mount Bath Spout, Arc


- Spout reach: 229 mm.
- Spout height: 74 mm.
- Brass construction.
- Coordinate with your choice of Artifacts handles for a personalized design (Handles sold separately).


Artifacts

Swing Lever handle


- Solid metal construction.
- Leak-free 1/4 turn ceramic disc valve with lifetime warranty.
- · Lever handle.

Dimensions are approximate Unit: mm

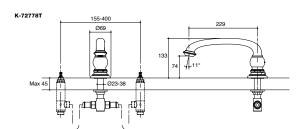

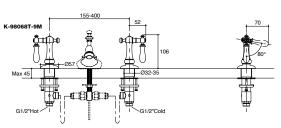

sion for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







K-72762T-9M-CP

K-72762T-9M-BV

K-72762T-9M-2BZ

Artifacts

Single-Hole Lavatory Faucet

- Spout reach: 144 mm.
- Spout height: 97 mm.
- Brass construction.
- Lever handle.
- · Laminar flow aerator for clean aesthetic and reduced splash.
- Includes click drain.



Artifacts Slide Bar

• Brass construction.











K-72799T-BV

K-72799T-2BZ

K-72799T-CP Artifacts Slide Bar Trim

• Solid metal construction.







K-72796T-CP


K-72796T-BV

K-72796T-2BZ


Artifacts

Wall-Mount Supply Elbow


- Brass construction.
- Includes check valve for back flow prevention.

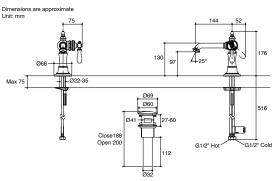

Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout





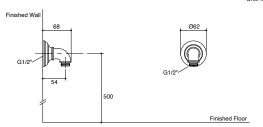

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Fairfax™ **Bathroom Faucets**









K-8657T-B-CP

K-8657T-B-BN

K-8657T-B-AF

K-8657T-B-BV

Single-Hole Lavatory Faucet

- Spout reach: 131 mm.
- Spout height: 61 mm.
- Brass construction.
- Lever handle.
- Includes pop-up drain.
- Includes white mineral stone cap.











K-12184T-B-CP K-12184T-B-BN K-12184T-B-AF

K-12184T-B-BV


Tall Single-Hole Lavatory Faucet

- Spout reach: 131 mm.
- Spout height: 147 mm.
- · Brass construction.
- Lever handle.
- Includes pop-up drain.
- Includes white mineral stone cap.






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

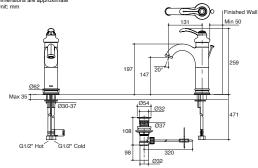

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Wildspread Lavatory Faucet

- Spout reach: 133 mm.
- Spout height: 56 mm. · Brass construction.
- Lever handle.
- Includes pop-up drain.
- Includes white mineral stone cap.

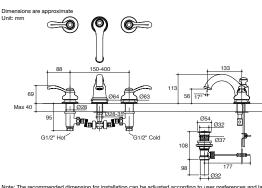



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-12885T-B4-AF

K-12885T-B4-BV

Fairfax

Deck-Mount Bath Faucet

- Spout reach: 224 mm.
- Spout height: 172 mm.
- · Brass construction.
- Lever handle.
- Includes white mineral stone cap.




Fairfax

Deck-Mount Bath Faucet


- Spout reach: 162 mm.
- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Katalyst air-induction technology for powerful and even
- Includes 5-function handshower and diverter.
- Includes white mineral stone cap.
- Includes 8" round showerhead.

Dimensions are approximate Unit: mm 155-400


on for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

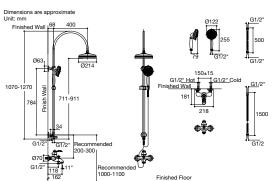

nended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Fairfax

Exposed Wall-Mount Bath and Shower Mixer

K-72695T-B4-BV

- Spout reach: 162 mm.
- Brass construction.

K-72695T-B4-AF


- Adjustable inlet fittings with 15 mm tolerance.
- Includes 5-function handshower and diverter.
- Includes white mineral stone cap.




Fairfax


Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm tolerance.
- Includes 5-function handshower.
- Includes white mineral stone cap.

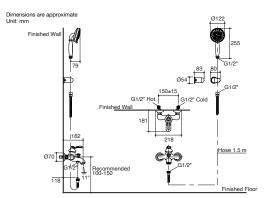




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

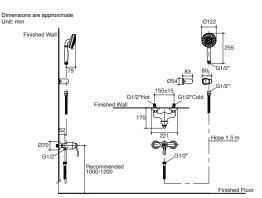

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







K-72805T-C4-CP

K-72805T-C4-AF

Modulo Recessed Bath and Shower Valve Trim-Fairfax

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- **Required Accessories** Modulo Universal Box (K-98699T-B-NA)








K-72806T-C4-CP


K-72806T-C4-AF

K-72806T-C4-BV


Modulo Recessed Shower Valve Trim-Fairfax

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)

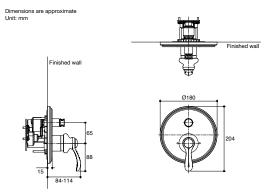




are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

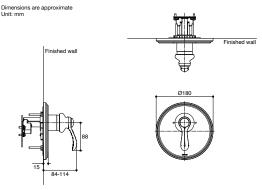

ition can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-98699T-B-NA

Modulo Universal Box

- Brass construction.
- Leak-free noise reduction enclosure.
- Easy installation.
- Interchangeable valve/trim solutions.
- Includes outlet plug for single outlet applications.

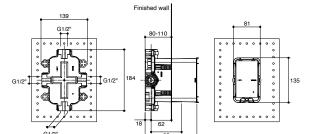

Dimensions are approximate Unit: mm

Finial™ **Bathroom Faucets**



K-8670X-4M-CP

Widespread Lavatory Faucet, Traditional Lever handle

- Spout reach: 127 mm.
- Spout height: 115 mm.
- Brass valve bodies.
- Quarter-turn washerless ceramic disc valves.
- Includes pop-up drain with lift rod and tailpiece.
- Lever handle.



K-16351X-AK-CP

Single Function Katalyst Showerhead with Arm and Flange


- Brass construction.
- 138 mm. round spray-plate.
- · Katalyst technology.




K-98459X-AK-CP

Single Function Katalyst Showerhead with Arm and Flange


- Brass construction.
- 140 mm. round spray-plate.
- Katalyst technology.

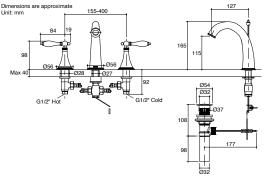




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Kelston™ **Bathroom Faucets**



K-13491T-4-CP




K-13491T-4-RGD




K-13491T-4-2BZ

Kelston

- 8" Widespread Lavatory Faucet
 Spout reach: 116 mm.
- Spout height: 104 mm.
- Brass construction.
- Lever handle.
- Quarter-turn ceramic disc valves.
- Includes pop-up drain with lift rod.

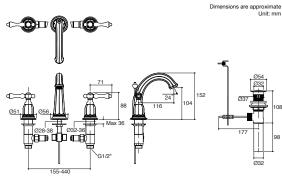

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-13494T-4-CP




K-13494T-4-RGD




Kelston

Deck-Mount Bath Faucet Spout reach: 165 mm. Spout height: 149 mm.

- Brass construction.
- Lever handle.
- Quarter-turn ceramic disc valves.

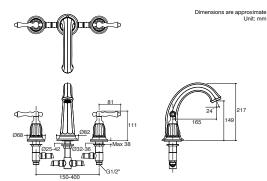

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Kelston

Free-Standing Bath Filler with Handshower

- Spout reach: 223 mm.
- Spout height: 867-887 mm.
- Brass construction.
- Includes 5-way Rainduet handshower with 1.5 m hose.
- **Required Accessories**

Free-Standing Bath Filler Mounting Base (K-97905T-NA)

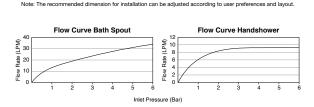

Dimensions are approximate Unit: mm

G1/2"、

80-600

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

367-887

| Finished Wall Min 200


Bath



K-97905T-NA

Free-Standing Bath Filler Mounting Base

- Brass construction.
- Sold separately from faucet to enable twostep installation.
- To be used with Kohler free-standing bath filler with handshower.

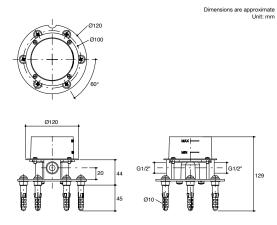





Kelston

Dual Showerheads Curved Shower Column

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 10" round showerhead with shower column.
- Includes 5-functions handshower with bracket.

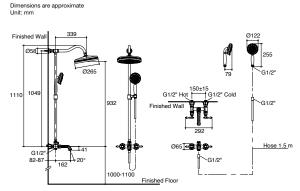

preferences and layout





Kelston

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 241 mm.
- · Brass construction.
- · Quarter-turn ceramic disc valves.
- Includes 5-way handshower with 1.5 m. hose.



Kelston


Exposed Wall-Mount Shower Mixer

- Brass construction.
- Quarter-turn ceramic disc valves.
- Includes 5-way handshower with 1.5 m. hose.




Modulo Recessed Bath and Shower Valve Trim-Kelston


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- **Required Accessories** Modulo Universal Box (K-98699T-B-NA)

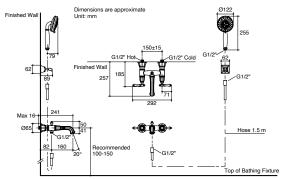


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

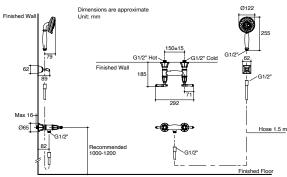


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

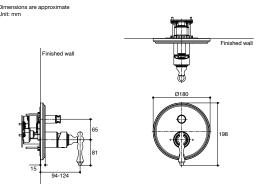

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate, (1 gallon = 3,785 liters, 1 bar = 14.5 psi)



K-72802T-B4-CP

Modulo Recessed Shower Valve Trim-Kelston


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)




K-98699T-B-NA

Modulo Universal Box

- Brass construction.
- Leak-free noise reduction enclosure.
- Easy installation.
- Interchangeable valve/trim solutions.
- Includes outlet plug for single outlet applications.

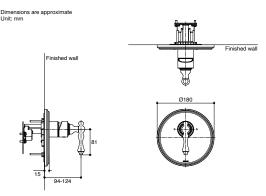


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm

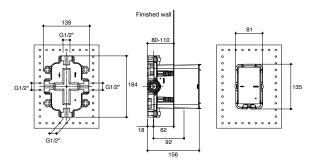

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Memoirs™ **Bathroom Faucets**





K-23372T-B4-CP

K-23372T-B4-2MB

Memoirs

Single-Hole Lavatory Faucet

- Spout reach: 130 mm.
- Spout height: 104 mm.
- Brass construction.
- Cable drain uses a different structure to save undercounter space and makes installation/ maintenance easier.
- Lever handle.





K-23373T-B4-CP

K-23373T-B4-2MB

Memoirs

Tall Single-Hole Lavatory Faucet

- Spout reach: 175 mm.
- Spout height: 246 mm.
- Brass construction.
- Includes click drain.
- · Lever handle.



K-454X-3S-CP

with Cross Lever handle



K-454X-4V-CP with Deco Lever handle







Memoirs


Widespread Lavatory Faucet

- Spout reach: 120 mm.
- Spout height: 54 mm.
- Brass construction.
- Includes pop-up drain.







ximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

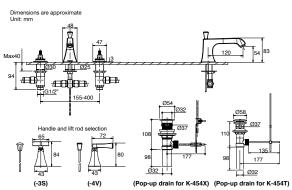

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-469T-4V-2MB

Memoirs

Deck-Mount Bath Faucet

- Spout reach: 159 mm.
- Spout height: 82 mm.
- Brass construction.
- Lever handle.



K-22559T-4V-2MB

Memoirs

Free-Standing Bath Filler with Handshower

- Spout reach: 221 mm.
- Spout height: 885-905 mm.
- · Brass construction.
- Includes 2-function handshower.
- Required Accessories

Free-Standing Bath Filler Mounting Base (K-97905T-NA)




K-97905T-NA


Free-Standing Bath Filler Mounting Base

- Brass construction.
- Sold separately from faucet to enable two-step installation.
- To be used with Kohler free-standing bath filler with handshower.


Dimensions are approximate Unit: mm

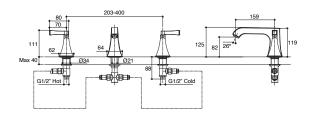


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

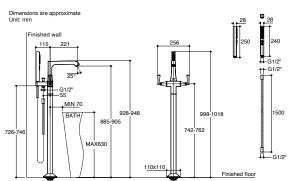

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

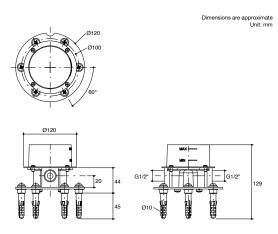

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-31153T-B4-2MB

Memoirs

3-Way Shower Column

- Spout reach: 203-213 mm.
- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes 1-function showerhead.
- Includes 5-function handshower.



K-72661T-4V-2MB

Memoirs


Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 224 mm.
- · Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes 5-function handshower.




Handshower Slide Bar


- Brass construction.
- Required Accessories Memoirs Slide Bar Trim (K-421T)

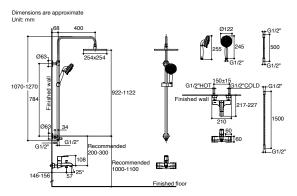


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

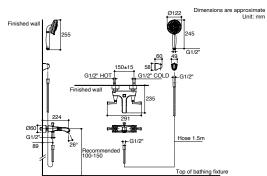


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-421T-2MB

Memoirs Slide Bar Trim

• Brass construction.



K-422T-2MB

Memoirs

Wall-Mount Bracket

- · Brass construction.
- Bracket pivots and rotates to position handshower at desired angle.



K-99960T-B4V-2MB

Modulo Classic Bath and Shower Trim and Valve-Memiors

- Solid metal construction.
- Easy, Sealant-free installation.
- **Required Accessories** Modulo Universal Box (K-98699T-B-NA)




K-99961T-B4V-2MB

Modulo Classic shower only trim and valve-Memiors


- Solid metal construction.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm




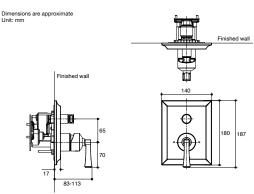


Note: The re



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



ation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-98699T-B-NA

Modulo Universal Box

- Brass construction.
- Leak-free noise reduction enclosure.
- Easy installation.
- Interchangeable valve/trim solutions.
- Includes outlet plug for single outlet applications.




K-72663T-CP


Memoirs

Deck-Mount Diverter and Handshower


- Brass construction (Diverter and Handshower holder).
- Katalyst air-induction technology.
- 122 mm spray-plate diameter.
- 5-function handshower.

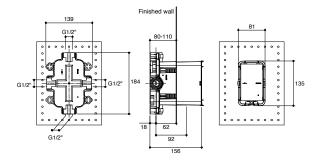

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

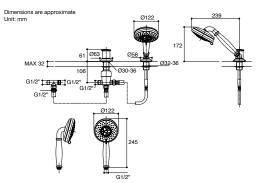

lation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Occasion™ **Bathroom Faucets**



Occasion

Single-Hole Lavatory Faucet


- Spout reach: 135 mm.
- Spout height: 102 mm.
- · Brass construction.
- Lever handle.
- Coin aerator allows for easy cleaning and maintenance.
- Includes cable drain.




Occasion


Tall Single-Hole Lavatory Faucet

- Spout reach: 155 mm.
- Spout height: 177 mm.
- Brass construction.
- · Lever handle.
- Coin aerator allows for easy cleaning and maintenance.
- Includes click drain.






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Occasion

Widespread Lavatory Faucet

- Spout reach: 155 mm.
- Spout height: 103 mm.
- Brass construction.
- · Lever handle.
- Coin aerator allows for easy cleaning and maintenance.
- Includes cable drain.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Occasion

Deck-Mount Bath Faucet

- Spout reach: 212 mm.
- Spout height: 102 mm.
- · Brass construction.
- Lever handle.
- Laminar flow aerator for clean aesthetic and reduced splash.




Occasion


Free-Standing Bath Filler

- Spout reach: 231 mm.
- Spout height: 782-802 mm.
- · Brass construction.
- Laminar flow aerator for clean aesthetic and reduced splash.
- Includes 3-function handshower.


Required Accessories

Free-Standing Bath Filler Mounting Base (K-97905T-NA)

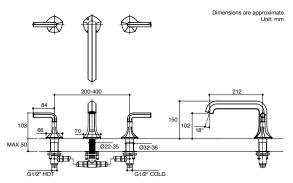




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

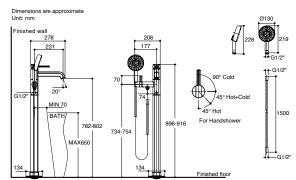

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97905T-NA

Free-Standing Bath Filler Mounting Base

- Brass construction.
- · Sold separately from faucet to enable twostep installation.
- To be used with Kohler free-standing bath filler with handshower.

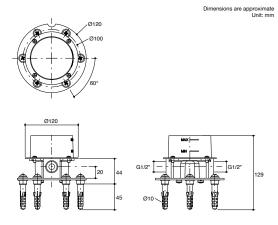

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-EX27030T-4-CP

K-EX27030T-4-BL

Occasion

Shower Column

- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Includes 1-function 10" round showerhead.
- Includes 3-function handshower.



K-EX27028T-9-CP

K-EX27028T-9-BL

Occasion

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 3-function handshower.




K-EX27029T-9-CP

K-EX27029T-9-BL


Occasion

Exposed Wall-Mount Bath and Shower Mixer


- Spout reach: 116 mm.
- · Brass construction.
- Adjustable inlet fittings with 15 mm tolerance.
- · Laminar flow aerator for clean aesthetic and reduced splash.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 3-function handshower.

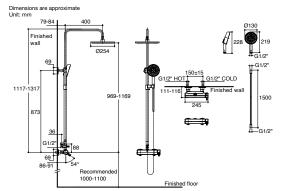


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




re approximate, (1 gallon = 3,785 liters, 1 bar = 14,5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

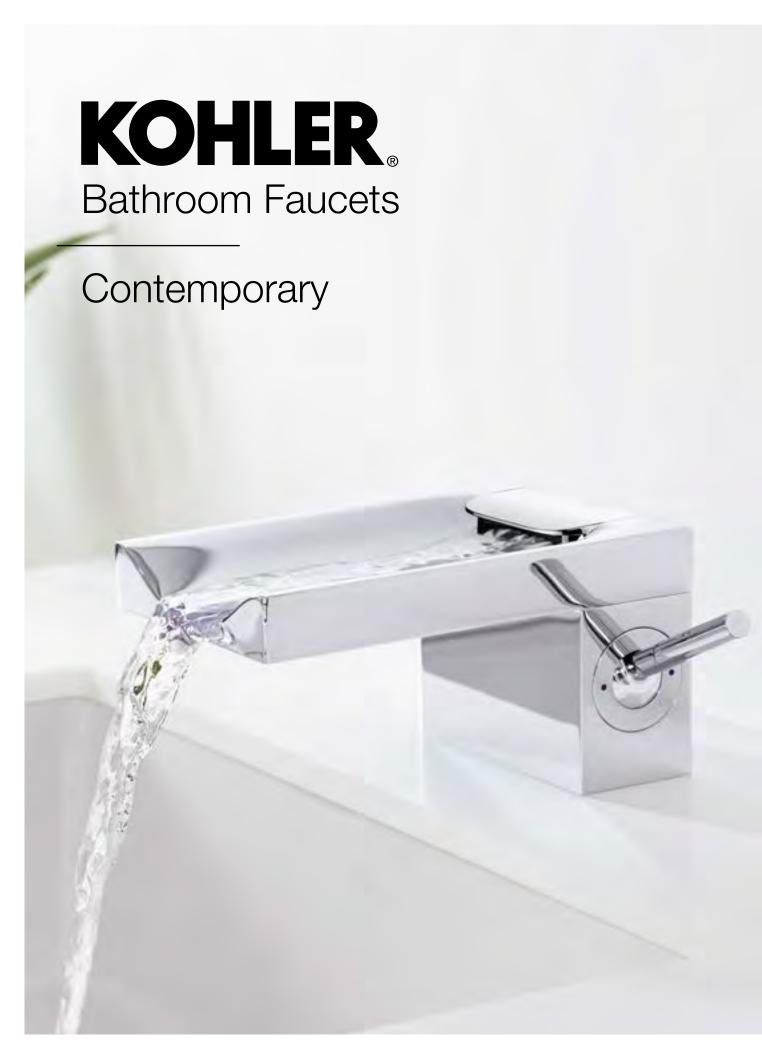

Accliv™

Bathroom Faucets



K-33059T-4CD-CP

Cold Only Lavatory Faucet

- Spout reach: 109 mm.
- Spout height: 95 mm.
- Brass construction.
- Lever handle.
- Coin aerator allows for easy cleaning and maintenance.





K-33059T-4-CP

K-33059T-4-AF

Accliv

Single-Hole Lavatory Faucet

- Spout reach: 109 mm.
- Spout height: 95 mm.
- · Brass construction.
- Lever handle.
- Coin aerator allows for easy cleaning and maintenance.
- Includes cable drain.





K-33063T-4-CP


K-33063T-4-AF

Accliv


Tall Single-Hole Lavatory Faucet

- Spout reach: 147 mm.
- Spout height: 180 mm.
- Brass construction.
- Lever handle.
- · Coin aerator allows for easy cleaning and maintenance.
- Includes click drain.


Dimensio Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Accliv

Widespread Lavatory Faucet

- Spout reach: 110 mm.
- Spout height: 94 mm.
- Brass construction.
- · Lever handle.
- · Coin aerator allows for easy cleaning and maintenance.

K-33065T-4-AF

• Includes pop-up drain.



K-33072T-4-CP

K-33072T-4-AF

Accliv

Deck-Mount Bath and Shower Faucet


- Spout reach: 143 mm.
- Spout Height: 102 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Auto-return Diverter.
- Includes 3-function hand shower.




Accliv

Thermostatic Shower Column


- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance
- Katalyst air-induction technology for powerful and even coverage.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 1-function 10" round showerhead.
- Includes 3-function handshower.

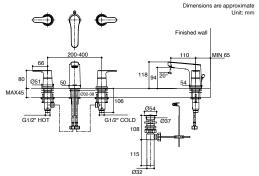


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

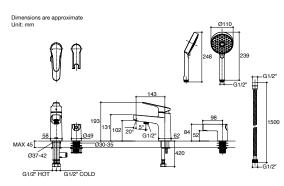


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

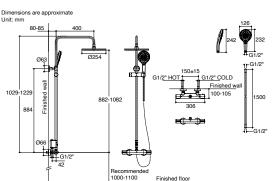

nended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-33073T-4-CP

K-33073T-4-AF

Accliv Free-Standing Bath Filler with Handshower

- Spout reach: 226 mm.
- Spout height: 851-871 mm.
- Brass Construction.
- Coin aerator allows for easy cleaning and maintenance.
- Auto-return Diverter.
- Includes 3-function handshower.
- Required Accessories


Free-Standing Bath Filler Mounting Base (K-97904T-NA)




K-97904T-NA

Free-Standing Bath Filler Mounting Base

- · Brass construction.
- Sold separately from faucet to enable two-step installation.
- To be used with Kohler free-standing bath filler with handshower.

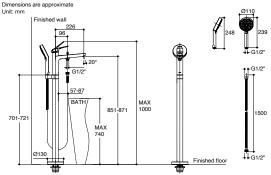


led dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Accliv

Thermostatic Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 192-197 mm.
- · Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Adjustable inlet fittings with 15 mm. tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Auto-return Diverter.
- Includes 3-function handshower.

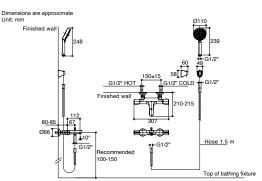

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Accliv

Thermostatic Exposed Wall-Mount Shower Mixer


- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Auto-return diverter.
- Includes 3-function handshower.




Accliv

Slide Bar

- Brass construction.
- Wall mounting hardware assures a secure installation.
- Includes adjustable bracket.

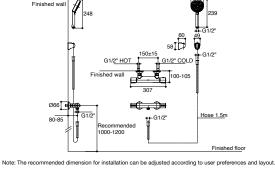

Dimensions are approximate Unit: mm



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

50 Ø39] (

Dimensions are approximate Unit: mm


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




K-33115X-4CD-CP

Wall-Mount Shower Valve-Cold Water Only

- · Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.






K-29136X-4-CP

Accliv


Recessed Bath and Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Aleo™S Bathroom Faucets



K-25102T-4-CP

Aleo S

Single-Hole Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 84 mm.
- Brass construction.
- Lever handle.
- Coin aerator allows for easy cleaning and maintenance.
- Includes cable drain.



K-25102T-4CD-CP

Aleo S

Cold Water Single-Hole Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 84 mm.
- · Brass construction.
- · Lever handle.
- Coin aerator allows for easy cleaning and maintenance.




K-25102T-4E2-CP

Aleo S


Single-Hole Lavatory Faucet

- Spout reach: 101 mm.
- Spout reach. To finn.
 Spout height: 80 mm.
- Brass construction.
- Lever handle.
- Includes cable drain.
- Flow rate reduced by 50% meet LEED guildelines for reduction in water consumption.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-25103T-4E2-CP

Aleo S

Tall Single-Hole Lavatory Faucet (Eco)

- Spout reach: 152 mm.
- Spout height: 206 mm.
- Brass Construction.
- Lever handle.
- Includes click drain.
- Flow rate reduced by 50% meet LEED guildelines for reduction in water consumption.



K-25103T-4CD-CP

Tall Cold Water Single-Hole Single-Control Lavatory Faucet

- Spout reach: 151 mm.
- Spout height: 211 mm.
- Brass construction.
- Lever handle.
- Coin aerator allows for easy cleaning and maintenance.




K-31237T-4-CP


Aleo S

Widespread Lavatory Faucet


- Spout reach: 100 mm.
- Spout height: 84 mm.
- Brass construction.
- · Lever handle.
- Coin aerator allows for easy cleaning and maintenance.
- Includes cable drain.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

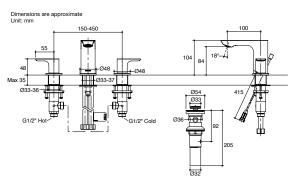

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-72275T-4-CP *Non-stock item

Single-Hole Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 88 mm.
- Brass construction.
- Coin aerator (easy clean).
- Lever handle.



K-25105T-B4-CP

Aleo S

Wall-Mount Lavatory Faucet

- Spout reach: 165 mm.
- Brass Construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes click drain.
- **Required Accessories**


Single Handle Wall-Mount Lavatory Faucet Valve (K-28028T-NA).




K-28028T-NA

Single Handle Wall-Mount Lavatory Faucet Valve


Brass Construction.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

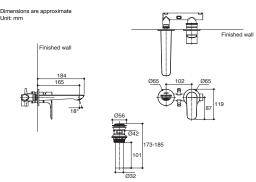




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

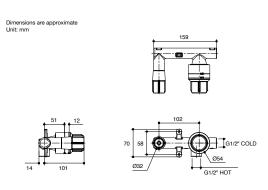

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-72278T-4-CP

Single Handle Swiveling Lavatoty Faucet

- Spout reach: 154 mm.
- Spout height: 244 mm.
- Brass construction.
- Swivel spout.
- Lever handle.



K-72292T-4-CP

Aleo

Deck-Mount Bath and Shower Faucet

- Spout reach: 160 mm.
- Spout height: 133 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes 3-way handshower with bracket.



K-31239T-4-CP


Aleo S


Free-Standing Bath Filler with Handshower

- Spout reach: 216 mm.
- Spout height: 902-922 mm
- Brass Construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes Shift+ 2-function handshower, push button.


Required Accessories

Free-Standing Bath Filler Mounting Base (K-97904T-NA).

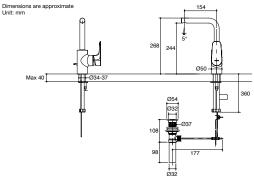





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

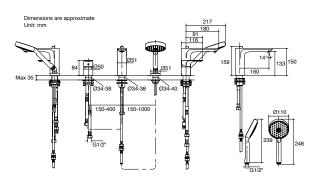


Note: The recommended dimension for installation can be adjusted according to user preferences and layout

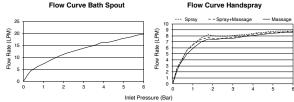

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

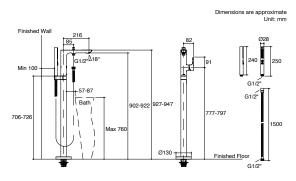



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97904T-NA

Free-Standing Bath Filler Mounting Base

- · Brass construction.
- Sold separately from faucet to enable two-step installation.
- To be used with Kohler free-standing bath filler with handshower.



K-25107T-4-CP

Aleo S

Wall-Mount Bath and Shower Faucet

- Spout reach: 182-192 mm.
- Brass Construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes 3-function handshower.
- Includes adjustable bracket.





K-25108T-4-CP

Aleo

Wall-Mount Shower Faucet


- Brass Construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes 3-function handshower.
- Includes adjustable bracket.









Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

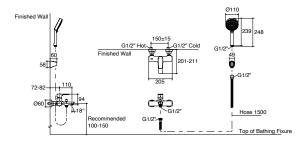


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

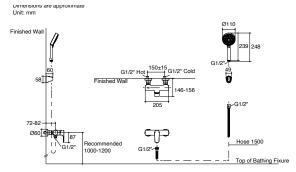

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-72286T-9-CP

Thermostatic Wall-Mount Bath and Shower Mixer

- Spout reach: 200-210 mm.
- Brass Construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 110 mm. Awaken Geometric 3-function hand-
- Adjustable inlet fittings with 15 mm. tolerance.



K-72352T-9-CP

Aleo

Thermostatic Wall-Mount Shower Mixer

- · Brass Construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 110 mm. Awaken Geometric 3-function handshower.
- Adjustable inlet fittings with 15 mm. tolerance.




K-97822T-9-CP

Aleo


Thermostatic Dual Showerheads Angular Shower Column

- Brass Construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Optimized sprayface and large nozzles with Katalyst Air-induction for improved water coverage.
- Includes 10" ultra thin round Katalyst Air Rainhead.
- Includes 110 mm. Renew Organic 3-function handshower.
- Adjustable inlet fittings with 15mm tolerance.




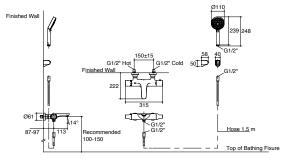


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

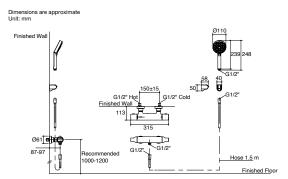


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

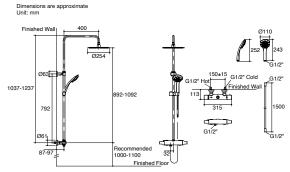

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97826T-4-CP

Aleo

Shower Column

- Brass Construction.
- Optimized sprayface and large nozzles with Katalyst Air-induction for improved water coverage.
- Includes 8" ultra thin round Katalyst Air Rainhead.
- Includes 110 mm. Renew Organic 3-function handshower.
- Adjustable inlet fittings with 15 mm.tolerance





K-26242T-4-CP

Aleo


Shower Faucet


- Brass Construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Optimized sprayface and large nozzles with Katalyst Air-induction for improved water coverage.
- Includes 10" ultra thin round Katalyst Air Rainhead.
- Includes 3-function handshower.

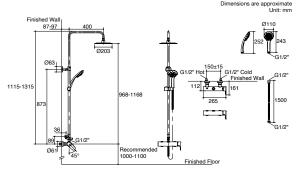



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

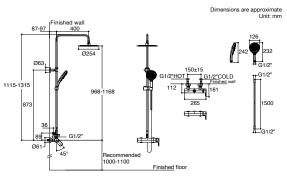



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Atom™ **Bathroom Faucets**



K-30447T-4-CP

Atom

Single-Hole Lavatory Faucet

- Spout reach: 109 mm.
- Spout height: 65 mm.
- Brass construction.
- Lever Handle.
- · Coin aerator allows for easy cleaning and maintenance.
- Includes pop-up drain.



K-30447T-4CD-CP

Cold Only Lavatory Faucet

- Spout reach: 109 mm.
- Spout height: 65 mm.
- Brass construction.
- Lever Handle.
- Coin aerator allows for easy cleaning and maintenance.





K-32403T-7-CP

Atom

2-Way Thermostatic Shower Column


- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 8" round showerhead.
- Includes 3-function handshower.






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

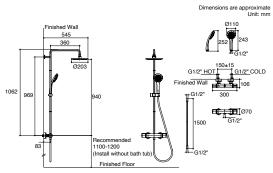





K-32404T-7-CP

Atom

3-Way Thermostatic Shower Column

- Reach: 193 mm.
- · Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Concealed, easy-clean aerator and key.
- Includes bath outlet .
- Includes 8" round showerhead.
- Includes 3-function handshower.



K-28955X-4-CP

Recessed Shower Valve Mixer


- · Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-28956X-4-CP


Recessed Bath and Shower Valve Mixer

- · Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.

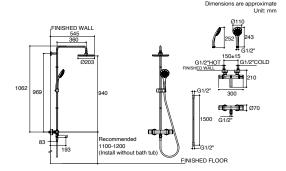





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




nsion for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



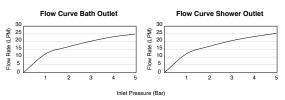

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-28953X-4CD-CP

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-28954X-4CD-CP


Atom

Recessed Shower Valve-Cold Water Only


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Avid™ **Bathroom Faucets**





K-97345T-B4-CP

Single-Hole Lavatory Faucet

- Spout reach: 148 mm.
- Spout height: 89 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Cable drain uses a different structure to save undercounter space and makes installation/maintenance easier.



K-97348T-B4-CP

Avid

Super Tall Single-Hole Lavatory Faucet

- Spout reach: 148 mm.
- Spout height: 263 mm.
- Brass construction.
- Laminar flow aerator for clean aesthetic and reduced splash.
- · Includes click drain.




K-97352T-4-CP


Avid

Widespread Lavatory Faucet


- Spout reach: 148 mm.
- Spout height: 108 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- · Includes pop-up drain.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



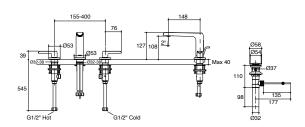

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-97367T-B4

Avid

Free-Standing Bath Filler with Handshower

- Spout reach: 226 mm.
- Spout height: 860-880 mm.
- Brass Construction.
- Directionally adjustable, laminar-flow aerator.
- Includes Shift+ 2-function handshower, push button.
- Required Accessories

Free-Standing Bath Filler Mounting Base (K-97904T-NA)



K-97904T-NA

Free-Standing Bath Filler Mounting Base

- · Brass construction.
- Sold separately from faucet to enable two-step installation.
- To be used with Kohler free-standing bath filler with handshower.




K-97360T-B4-CP


Deck-Mount Bath and Shower Faucet with Handshower and Diverter

- Spout reach: 198 mm.
- Spout height: 149 mm.
- Brass Construction.
- Directionally adjustable, laminar-flow aerator.
- Includes Shift+ 2-function handshower, push button.
- Lever handle

Dimensions are approximate Unit: mm

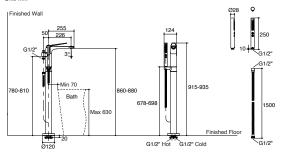


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

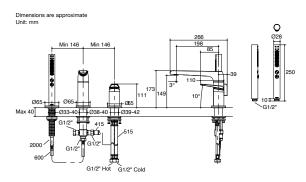

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97368T-4-CP

Exposed Wall-Mount Shower Mixer

- Brass Construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.



K-97369T-4-CP

Avid

Exposed Wall-Mount Bath and Shower Mixer


- Spout reach: 215-225 mm.
- Brass Construction.
- Directionally adjustable, laminar-flow aerator.
- High-temperature limit stop for added safety.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.




K-97389T-9-CP

Thermostatic Dual Showerheads Angular Shower Column


- Reach: 134 mm.
- Brass Construction.
- Directionally adjustable, laminar flow aerator.
- Precise thermostatic control for added safety.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.
- Includes 10" round showerhead.

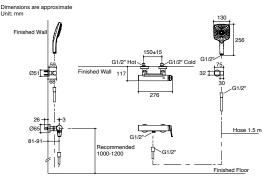


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

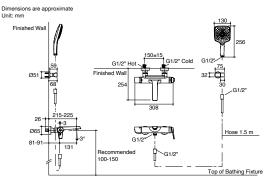


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

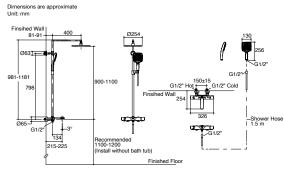



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97366T-B4-CP

Modulo Recessed Valve with Diverter and Hanlde-Avid

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)



K-97365T-B4-CP

Modulo Recessed Shower Valve Trim-Avid


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)




K-98699T-B-NA

Modulo Universal Box


- Brass construction.
- Leak-free noise reduction enclosure.
- Easy installation.
- Interchangeable valve/trim solutions.
- Includes outlet plug for single outlet applications.

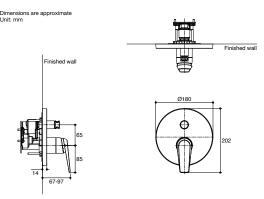


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

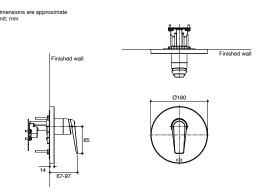


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



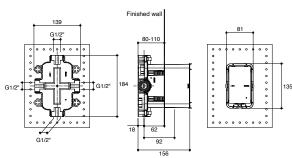

Beam™ **Bathroom Faucets**



K-26040X-4-CP

Beam

Single-Hole Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 88 mm.
- Brass construction.
- · Coin aerator allows for easy cleaning and maintenance.
- Includes click drain.
- · Lever handle.



K-26042X-4CD-CP

Beam

Pillar Tap


- Spout reach: 100 mm.
- Spout height: 87 mm.
- · Brass construction.
- · Coin aerator allows for easy cleaning and maintenance.
- Lever handle.




K-28840X-4CD-CP

Wall-Mount Shower Valve-Cold Water Only


- · Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




Note: The recommended dimension for installation can be adjusted acc




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

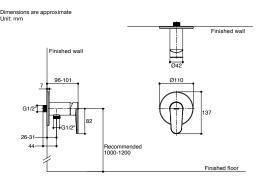

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Beitou™ **Bathroom Faucets**





K-99856X-4-CP

Beitou

Single-Hole Lavatory Faucet

- Spout reach: 144 mm.
- Spout height: 68 mm.
- Brass construction.
- Joystick handle.
- · Artful water delivery through exposed spout design.
- Includes click drain.



K-99858X-4-CP

Beitou

Tall Single-Hole Lavatory Faucet

- Spout reach: 144 mm.
- Spout height: 253 mm.
- Brass construction.
- Joystick handle.
- Artful water delivery through exposed spout design.
- Includes click drain.




K-99876X-4-CP

Beitou


Wall-Mount Lavatory Faucet

- Spout reach: 167 mm.
- Brass construction.
- · Joystick handle.
- Artful water delivery through exposed spout design.
- Includes click drain.
- · Robust wall mounting system and hardware.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm

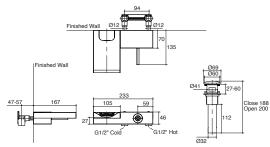

Note: The recommended dimension for installation can be adjusted according to user preferences and layout





K-99874T-B9-CP

Deck-Mount Thermostatic Bath Faucet with Handshower

- Spout reach: 192 mm.
- Spout height: 73 mm.
- Brass construction.
- Artful water delivery through exposed spout design.
- Precise thermostatic temperature control for added safety.
- Includes Shift+ 2-function handshower, push button.
- Knob handle.



K-99878T-9-CP

Beitou

Thermostatiac Free-Standing Bath and Shower Faucet

- Spout reach: 193 mm.
- Spout height: 842 mm.
- Brass construction.
- Artful water delivery through exposed spout design.
- Precise thermostatic temperature control for added safety.
- Includes Shift+ 2-function handshower, push button.
- Side handle.

Required Accessories


Free-Standing Bath Filler Mounting Base (K-97904T-NA)




K-97904T-NA

Free-Standing Bath Filler Mounting Base


- Brass construction.
- Sold separately from faucet to enable two-step installation.
- To be used with Kohler free-standing bath filler with handshower.

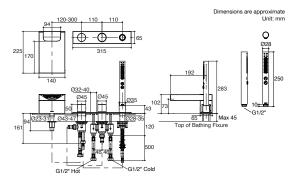


Note: The recommended dimension for installation can be adjusted according to user preferences and layout

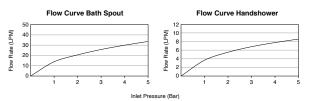

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

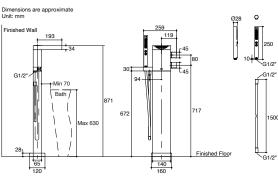




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Ø120





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-77276T-L-CP

Ceiling-Mount Showerhead

- Solid metal construction.
- Katalyst Air-Induction technology for powerful and even coverage.
- Integrated warm white lights powered by the flow of water.
 3-function showerhead (Katalyast Air Rain, Kloudburst and Laminar) with innovative hydro power moving massage



K-76017X-L-CP

Beitou

Ceiling-Mount Showerhead

- Solid metal construction.
- Katalyst Air-Induction technology for powerful and even coverage.
- Hydro power LED lighting.
- 3-function showerhead (Outer Rain, Center Rain and Laminar)





Beitou

Wall-Mount Showerhead

- Solid metal construction.
- Katalyst Air-Induction technology for powerful and even coverage.
- 3-function showerhead (Cascade, Rain and Laminar).
- Integrated warm white lights powered by the flow of water.


200-1200 Suspended Ceiling







Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm

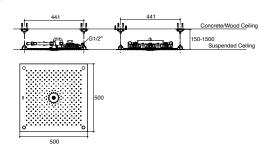



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

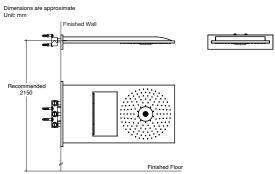

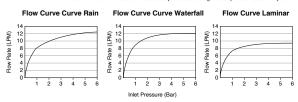



K-99865X-9-CP

Recessed Thermostatic 2-Way Trim

- Solid metal construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- · Line-matched faucets and showerheads available.
- Required Accessories

Beitou Recessed Thermostatic 2-Way Valve Set (K-99869X-CP)



K-99869X-CP


Beitou


Recessed Thermostatic 2-Way Valve Set

- Brass construction.
- Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.
- Required Accessories

Rececessed Thermostatic 2-Way Trim (K-99865X-9-CP)


Dimensions are approximate Unit: mm







Note: The recommended dimension for installation can be adjusted according to user preferences and layout.


Dimensions are approximate Unit: mm





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Inlet Pressure (Bar)

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

K-99866X-9-CP

Beitou


Recessed Thermostatic 3-Way Trim


- Solid metal construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Line-matched faucets and showerheads available.

Required Accessories

Beitou Recessed Thermostatic 3-Way Valve Set (K-99870X-CP)

Dimensions are approximate Unit: mm





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-99870X-CP

Recessed Thermostatic 3-Way Valve Set

- · Brass construction.
- · Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.
- Required Accessories

Rececessed Thermostatic 3-Way Trim (K-99866X-9-CP)



K-99867X-9-CP

Beitou

Recessed Thermostatic 4-Way Trim

- Solid metal construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Line-matched faucets and showerheads available.
- Required Accessories

Beitou Recessed Thermostatic 4-Way Valve Set (K-99871X-CP)



K-99871X-CP


Beitou


Recessed Thermostatic 4-Way Valve Set

- · Brass construction.
- Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.

Required Accessories


Rececessed Thermostatic 4-Way Trim (K-99867X-9-CP)






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm







Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Dimensions are approximate Unit: mm





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

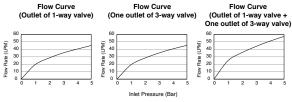



K-99868X-9-CP

Recessed Thermostatic 5-Way Trim

- Solid metal construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Line-matched faucets and showerheads available.
- Required Accessories

Beitou Recessed Thermostatic 5-Way Valve Set (K-99872X-CP)



K-99872X-CP


Beitou

Recessed Thermostatic 5-Way Valve Set

- · Brass construction.
- Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.
- Required Accessories

Rececessed Thermostatic 5-Way Trim (K-99868X-9-CP)


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm

Flow Rate (LPM)



Flow Curve Flow Curve Flow Curve (One outlet of 2-way valve) (Two outlet of 2-way valve) (One outlet of 3-way valve)



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Components™ **Bathroom Faucets**



K-21902T-4-3GC

Components

Widespread Lavatory Faucet, Lever Handle

- Spout reach: 160 mm.
- Spout height: 170 mm.
- · Brass construction.
- Concealed, easy-clean aerator and key.
- Exclusive finishes for modern products.
- Unique finishes innovation.
- · Includes click drain.
- Lever handles.



K-24711T-4-3GC

Components

Deck-Mount Bath Faucet, Lever Handle

- Spout reach: 191 mm.
- Spout height: 199 mm.
- Brass construction.
- Concealed, easy-clean aerator and key.
- Exclusive finishes for modern products.
- Unique finishes innovation.
- Lever handles.





K-21901T-4-3GC

Components


Wall-Mount Lavatory Faucet, Lever Handle

- Spout reach: 235-245 mm.
- Brass construction.
- Concealed, easy-clean aerator and key.
- Exclusive finishes for modern products.
- Unique finishes innovation.
- Includes click drain.
- · Lever handles.

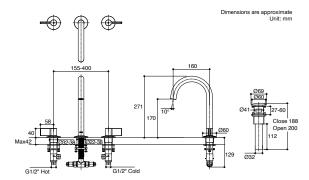





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

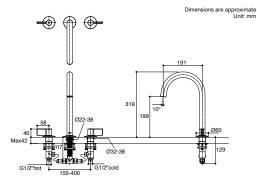


ded dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

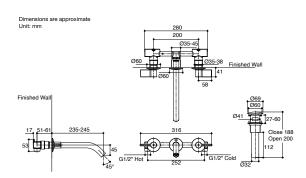



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-77989T-8A-3GC

Components

Handshower with Control

- Brass construction.
- Exclusive finishes for modern products.
- Unique finishes innovation.
- Includes 2-function handshower.
- Includes flexible G1/2" supply hoses and shower hose.



Components

Single-Hole Lavatory Faucet (Pin Handle)


- Spout reach: 129 mm.
- Spout height: 93 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Includes pop-up drain.




Components


Tall Single-Hole Lavatory Faucet (Pin Handle)

- Spout reach: 178 mm.
- Spout height: 200 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Includes pop-up drain.

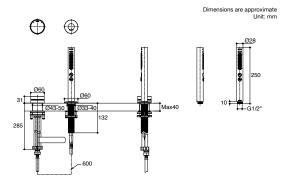





Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Components

Single-Hole Lavatory Faucet (Lever Handle)

- Spout reach: 140 mm.
- Spout height: 81 mm.
- Brass construction.
- Concealed, easy-clean aerator and key.
- Includes cable drain.



Components

Tall Single-Hole Lavatory Faucet (Lever Handle)

- Spout reach: 189 mm.
- Spout height: 201 mm.
- · Brass construction.
- · Concealed, easy-clean aerator and key.
- Includes click drain.



K-EX28098T-4-RGD


K-EX28098T-4-BL

K-EX28098T-4-2MB


Components

Super Tall Single-Hole Lavatory Faucet (Lever Handle)


- Spout reach: 189 mm.
- Spout height: 266 mm.
- Brass construction.
- Concealed, easy-clean aerator and key.
- Includes click drain.

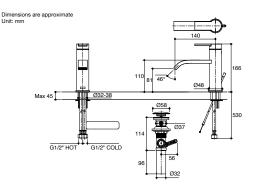


Note: The recommended dimension for installation can be adju ted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Components

Tall Widespread Spout, Tube

- Spout reach: 169 mm.
- Spout height: 257 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- · Coordinate with your choice of Components handle for a personalized design (Handle sold separately).
- Includes click drain.

Required Accessories

Components rocker handle (K-77963T-8A) Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)




Components Tall Widespread Spout, Ribbon


- Spout reach: 169 mm.
- Spout height: 260 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Coordinate with your choice of Components handle for a personalized design (Handle sold separately).
- Includes click drain.

Required Accessories


Components rocker handle (K-77963T-8A) Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)

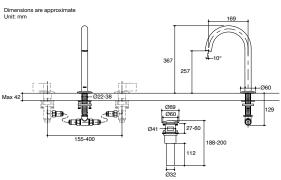


Note: The recommended dimension for installation can be adjusted ac-



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

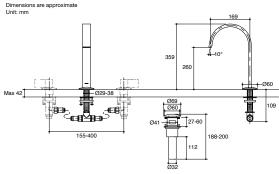



: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-77967T-CP K-77967T-BN K-77967T-AF K-77967T-RGD K-77967T-BL


Components

Widespread Spout, Tube


- Spout reach: 160 mm. • Spout height: 170 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Coordinate with your choice of Components handle for a personalized design (Handle sold separately).
- Includes click drain.

Required Accessories

Components rocker handle (K-77963T-8A) Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)

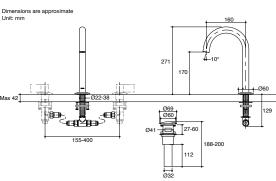

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-77968T-CP K-77968T-BN K-77968T-AF K-77968T-RGD K-77968T-BL

Components

Widespread Spout, Ribbon

- Spout reach: 160 mm.
- Spout height: 170 mm.
- · Brass construction.
- Concealed, easy-clean aerator.
- Coordinate with your choice of Components handle for a personalized design (Handle sold separately).
- Includes click drain.

Required Accessories

Components rocker handle (K-77963T-8A) Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)



Components

Widespread Spout, Row

- Spout reach: 169 mm.
- Spout height: 177 mm.
- · Brass construction.
- · Concealed, easy-clean aerator.
- Coordinate with your choice of Components handle for a personalized design (Handle sold separately).
- Includes click drain.

Required Accessories

Components rocker handle (K-77963T-8A) Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)



K-77985T-CP

K-77985T-BN

K-77985T-AF

K-77985T-RGD


Components


Deck-Mount Bath Spout, Tube

- Spout reach: 191 mm.
- Spout height: 199 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Coordinate with your choice of Components handle for a personalized design (Handle sold separately).


Required Accessories

Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)

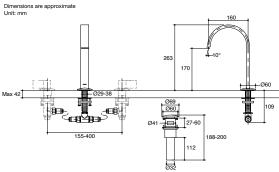





te: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

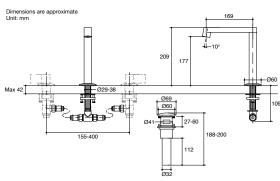


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

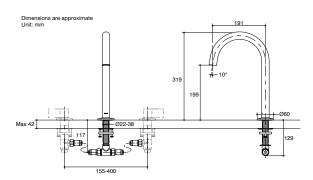

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Components

Deck-Mount Bath Spout, Ribbon

- Spout reach: 203 mm.
- Spout height: 211 mm.
- Brass construction.
- Laminar flow aerator for clean aesthetic and reduced
- Coordinate with your choice of Components handle for a personalized design (Handle sold separately).

Required Accessories

Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)




Components


Deck-Mount Bath Spout, Row

- Spout reach: 203 mm.
- Spout height: 212 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- · Coordinate with your choice of Components handle for a personalized design (Handle sold separately).


Required Accessories

Components lever handles (K-77990T-4) Components industrial handles (K-77990T-9)

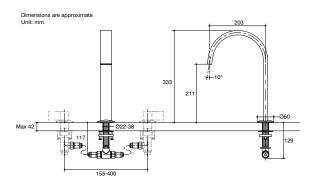




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

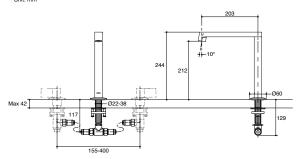

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Components

Lever Handles

- Solid metal construction.
- Lever handles
- Coordinate with your choice of Components spout for a personalized design (Spout sold separately).

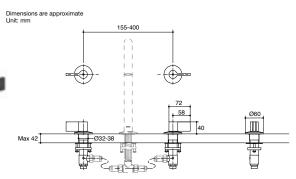


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Components Industrial Handles


- Solid metal construction.
- Coordinate with your choice of Components spout for a personalized design (Spout sold separately).

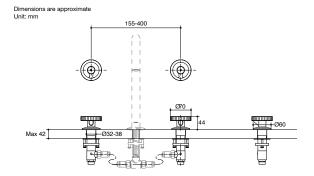

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



- Brass construction.
- · Cylindrical handle.
- Coordinate with your choice of Components spout for a personalized design (Spout sold separately).

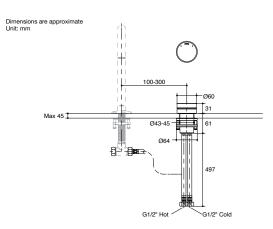

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Components


Wall-Mount Lavatory Spout-Ribbon


- Spout reach: 235-245 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Includes click drain. Includes escutcheon.

Required Accessories

Components Wall-Mount Single Control Handle Lavatory Faucet Valve (K-28138T)

Components Wall-Mount Single Control Lavatory Handle-Lever (K-77980T-4)

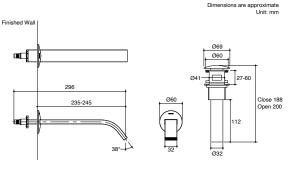



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Components

Wall-Mount Lavatory Spout-Tube

- Spout reach: 235-245 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Includes click drain.
- Includes escutcheon.

Required Accessories

Components Wall-Mount Single Control Handle Lavatory Faucet


Components Wall-Mount Single Control Lavatory Handle-Lever (K-77980T-4)




Components

Wall-Mount Single Control Handle Lavatory Faucet Valve


· Brass construction.

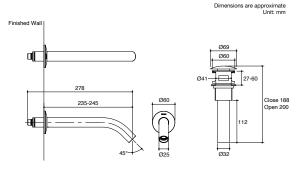


Note: The recommended dimension for installation can be adjusted according to user preferences and lavout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

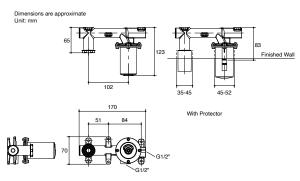

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)









K-77980T-4-AF K-77980T-4-RGD


K-77980T-4-CP Components

Wall-Mount Single Control Lavatory Handle-Lever

K-77980T-4-BN

- Brass construction.
- Includes escutcheon.
- · Lever handle.
- Coordinate with your choice of Components spout for a personalized design (Spout sold separately).

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Components

Wall-Mount Bath Faucet, Lever Handle

- Spout reach: 231-241 mm.
- Brass construction.
- Concealed, easy-clean aerator.



Components

Wall-Mount Bath Faucet, Industrial Handle

- Spout reach: 231-241 mm.
- Brass construction.
- Concealed, easy-clean aerator.



K-77984T-4-CP


Components


Free-Standing Bath Filler with Handshower

- Spout reach: 244 mm.
- Spout height: 938-958 mm.
- Brass construction.
- Includes Shift+ 2-function handshower and diverter.
- Storage platform that can hold bath supplies.
- Separate mounting base facilitates installation (sold separately).


Required Accessories


Free-Standing Bath Filler Mounting Base (K-97905T-NA)

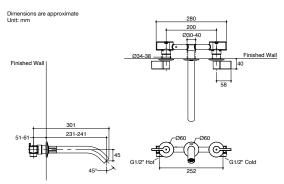




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

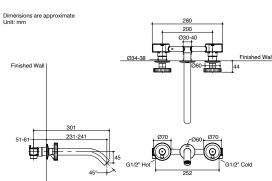




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

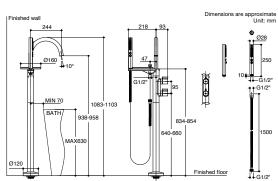

nded dimension for installation can be adjusted acc rding to user preferences and layout

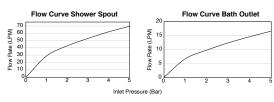

imate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97905T-NA

Free-Standing Bath Filler Mounting Base

- · Brass construction.
- Sold separately from faucet to enable twostep installation.
- To be used with Kohler free-standing bath filler with handshower.




Component Slide Bar Trim


- Brass construction.
- **Required Accessories** Handshower Slide Bar (K-8524X-BL)




Modulo Recessed Thermostatic Bath and Shower Valve and Trim-Components


- Brass construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes trim and handles.
- · Lever handles.
- **Required Accessories** Modulo Universal Box (K-98699T-B-NA)



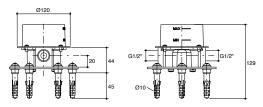


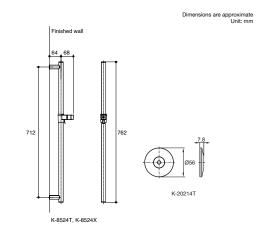

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

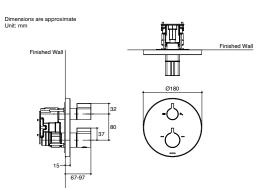

for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-78023T-4-CP



K-78023T-4-BN



K-78023T-4-AF



K-78023T-4-RGD

Modulo Recessed Thermostatic Shower Only Valve and Trim-Components

- · Brass construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes trim and handles.
- Lever handles.
- Required Accessories


Modulo Universal Box (K-98699T-B-NA)




K-98699T-B-NA

Modulo Universal Box

- Brass construction.
- Leak-free noise reduction enclosure.
- Easy installation.
- Interchangeable valve/trim solutions.
- Includes outlet plug for single outlet applications.




n for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm

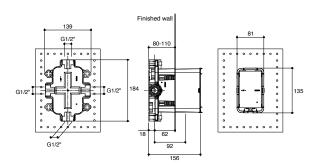

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

$Composed^{\mathsf{\tiny TM}}$ **Bathroom Faucets**







K-73050T-B7-CP

K-73050T-B7-BV

Composed

Single-Hole Lavatory Faucet

- Spout reach: 151 mm.
- Spout height: 103 mm.
- · Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Cable drain uses a different structure to save undercounter space and makes installation/maintenance easier.
- Cylindrical handle.





K-73159T-B7-CP

K-73159T-B7-BV

Composed

Single-Hole Lavatory Faucet

- Spout reach: 181 mm.
- Spout height: 204 mm.
- · Brass construction.
- · Laminar flow aerator for clean aesthetic and reduced splash.
- Includes click drain.
- Cylindrical handle.







K-73060X-4-CP


K-73060X-4-BV

K-73060T-4-BL *Non-stock item


Composed

Widespread Lavatory Faucet


- Spout reach: 151 mm.
- Spout height: 98 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes pop-up drain.
- · Lever handle.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

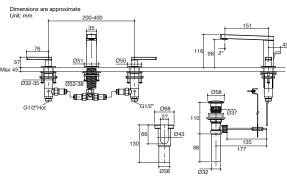

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-73061X-7-CP

K-73061X-7-BV

Composed

Wall-Mount Lavatory Faucet

- Spout reach: 169 mm.
- · Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes click drain.
- Cylindrical handle.







K-73067T-B4-CP

K-73067T-B4-BV

Composed

Wall-Mount Lavatory Faucet, 2 Handles

- Spout reach: 216 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes click drain.
- Lever handle.

• Required Accessories

Dual Handle Wall-Mount Lavatory Faucet Valve (K-31141T)




K-31141T-NA


Single Handle Wall-Mount Lavatory Faucet Valve

• Brass Construction.


Dimensions are approximate Unit: mm

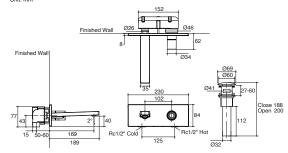


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

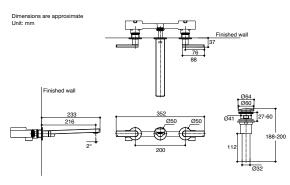




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

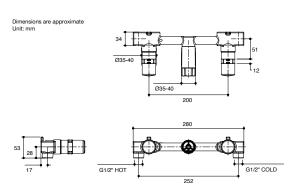

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-73078T-B4-BV


Composed

Deck-Mount Bath and Shower Faucet with Handshower and Diverter

- Spout reach: 210 mm.
- Spout height: 148 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes Shift+ 2-function handshower, push button.
- · Lever handle.

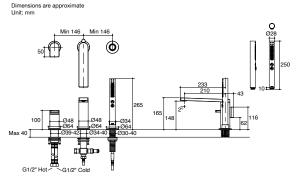

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-73087T-B4-CP K-73087T-B4-BV K-73087T-B4-AF K-73087T-B4-RGD


Composed


Free-Standing Bath Filler with Handshower

- Spout reach: 210 mm.
- Spout height: 883-903 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes Shift+ 2-function handshower, push button).
- · Lever handle.
- Separate mounting base facilitates installation (sold separately).

Required Accessories

Free-Standing Bath Filler Mounting Base (K-97905T-NA)

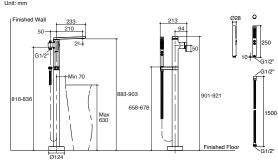




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97905T-NA

Free-Standing Bath Filler Mounting Base

- Brass construction.
- Sold separately from faucet to enable twostep installation.
- To be used with Kohler free-standing bath filler with handshower.

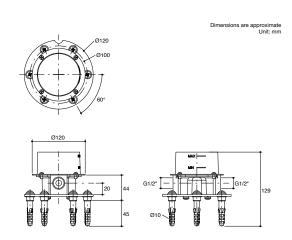

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Composed

Exposed Wall-Mount Shower Mixer


- · Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes Rain Duet push button, 3-function handshower.




Composed


Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 127 mm.
- · Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes Rain Duet push button, 3-function handshower.

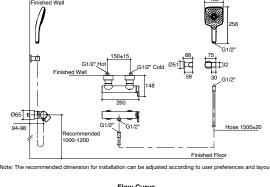




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

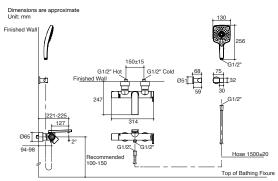

Note: The recommended dimension for installation can be adjusted according to user preferences and layout




es are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Composed

Thermostatic Shower Column

- Spout reach: 113 mm.
- · Brass construction.
- Directionally adjustable, laminar flow aerator.
- Precise thermostatic temperature control with over-ridable temperature
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.
- Includes 10" round showerhead.

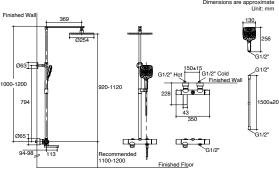

Note: The recommended dimension for installation can be adjusted acc

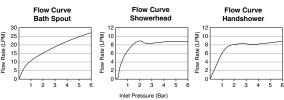

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-73108T-B4-CP

K-73108T-B4-BV

Modulo Recessed Bath and Shower Valve Trim-Composed

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- **Required Accessories**

Modulo Universal Box (K-98699T-B-NA)





K-73101T-B4-CP

K-73101T-B4-BV

Modulo Recessed Shower Valve Trim-Composed

- Solid metal construction .
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories


Modulo Universal Box (K-98699T-B-NA)




K-98699T-B-NA

Modulo Universal Box


- Brass construction.
- Leak-free noise reduction enclosure.
- Easy installation.
- Interchangeable valve/trim solutions.
- Includes outlet plug for single outlet applications.

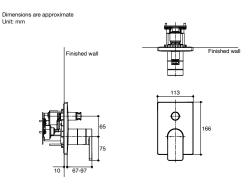


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

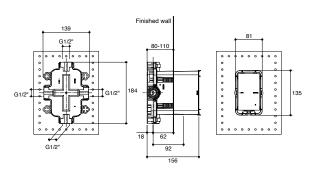

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Honesty™ **Bathroom Faucets**



K-24747X-4-CP

Honesty

Single-Hole Lavatory Faucet

- Spout reach: 105 mm.
- Spout height: 102 mm.
- Brass construction.
- Directionally adjustable aerator.
- Includes click drain.
- Flow rate reduced by 40% meet LEED guildelines for reduction in water consumption.
- Lever handle.



K-24747X-B4CD-CP

Honestv

Cold Only Lavatory Faucet

- Spout reach: 105 mm.
- Spout height: 102 mm.
- · Brass construction.
- Directionally adjustable aerator.
- Flow rate reduced by 40% meet LEED guildelines for reduction in water consumption.
- · Lever handle.




K-22088X-4-CP


Honesty


Tall Lavatory Faucet

- Spout reach: 130 mm.
- Spout height: 222 mm.
- Brass construction.
- Directionally adjustable aerator.
- Includes click drain.
- Flow rate reduced by 40% meet LEED guildelines for reduction in water consumption.
- Lever handle.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




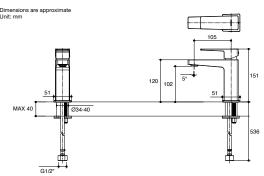


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







K-22088X-4CD-CP

Tall Cold Water Lavatory Faucet

- Spout reach: 130 mm.
- Spout height: 222 mm.
- Brass construction.
- Directionally adjustable aerator.
- Flow rate reduced by 40% meet LEED guildelines for reduction in water consumption.
- Lever handle.



K-22085X-4-CP

Honesty

Widespread Lavatory Faucet

- Spout reach: 105 mm.
- Spout height: 102 mm.
- Brass construction.
- Directionally adjustable aerator.
- · Lever handle.
- Includes click drain.




K-22089X-4-CP


Honesty

Wall-Mount Lavatory Faucet


- Spout reach: 159 mm.
- Brass construction.
- Directionally adjustable aerator.
- Lever handle.
- Includes click drain.

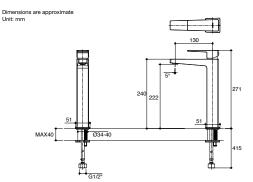


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

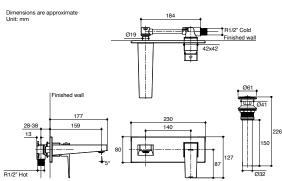



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-22089X-4CD-CP

Cold Wall-Mount Lavatory Faucet

- Spout reach: 159 mm.
- Brass construction.
- Directionally adjustable aerator.
- · Lever handle.



K-22087X-4-CP

Honesty

Deck-Mount Bath and Shower Faucet

- Spout reach: 160 mm.
- Spout height: 145 mm.
- Brass construction.
- Includes Shift+ 2-function handshower, push button.
- · Lever handle.




K-24750X-4CD-CP


Honesty

Wall-Mount Shower Valve-Cold Water Only


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

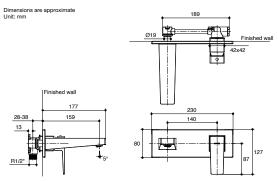


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

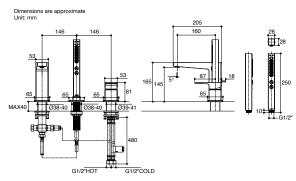


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

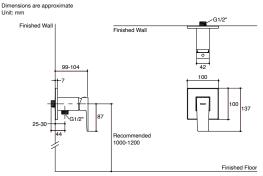

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-24751X-4CD-CP

Recessed Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-24752X-4-CP

Honesty

Recessed Shower Valve Mixer

- · Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-24753X-4-CP


Honesty

Recessed Bath and Shower Valve Mixer


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- · Includes diverter.

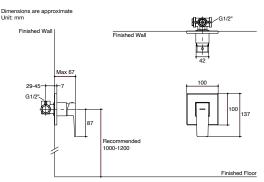


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

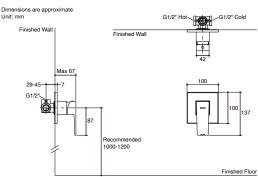


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

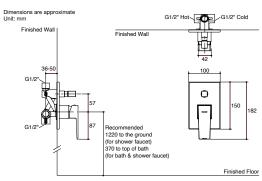

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

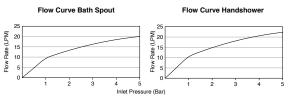

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-22086X-4-CP

Exposed Bath and Shower Faucet

- Spout reach: 135 mm..
- Brass construction.
- · Adjustable inlet fittings with 15 mm. tolerance.
- Includes adjustable bracket.
- Includes renew 3-function handshower.
- Includes 1.5 m. shower hose, chrome color.



K-24749X-4-CP

Honesty

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes Renew, 3-function handshower.
- Includes 1.5 m. shower hose, chrome color.
- Includes adjustable bracket.




K-24754X-4-CP


Honesty

Dual Showerheads Angular Shower Column


- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 8" ultra slim showerhead.
- Includes Renew 3-function handshower.
- Includes 1.5 m. shower hose, chrome color.

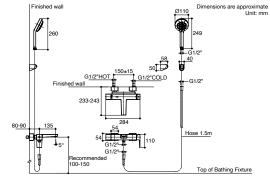


nended dimension for installation can be adjusted according to user preferences and layout





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

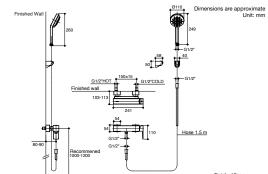



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

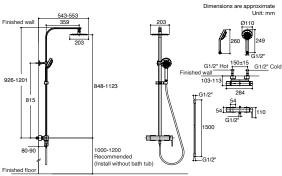

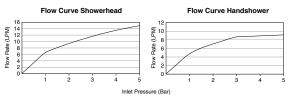

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

July™ **Bathroom Faucets**



K-16027X-B4CD-CP

July II

Cold Only Lavatory Faucet

- Spout reach: 110 mm.
- Spout height: 74 mm.
- Brass construction.
- Laminar flow aerator for clean aesthetic and reduced
- Flow rate reduced by 30% meets LEED guidelines for reduction in water consumption.
- Lever handle.



K-16027X-B4-CP

July II

Single Hole Lavatory Faucet


- Spout reach: 110 mm.
- Spout height: 74 mm.
- Brass construction.
- Includes pop-up drain with lift rod and tailpiece.
- · Lever handle.




K-23125T-B9-2BL


Thermostatic 3-Way Shower Column

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Optimized sprayface and large nozzles with Katalyst® Air-induction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 1-function showerhead.
- Includes 3-function handshower.

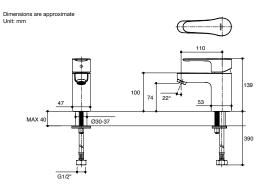





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

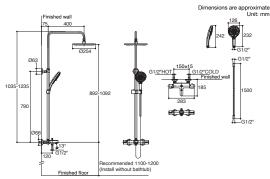

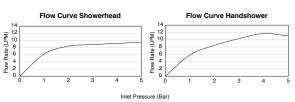

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-23126T-B9-2BL

3-Way Shower Column

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Optimized sprayface and large nozzles with Katalyst® Air-induction.
- Includes 1-function showerhead.
- Includes 3-function handshower.



K-72821X-4-CP

July

Dual Showerheads Angular Shower Column

- · Brass construction.
- Includes showerhead and shower column.
- Includes handshower with 1.5 m. hose and bracket.





K-7686X-4-CP

July


Exposed Wall-Mount Bath and Shower Mixer


- Spout reach: 165 mm.
- Brass construction.
- Includes 4-way handshower with 1.5 m. hose.
- Lever handle.

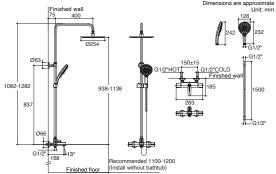

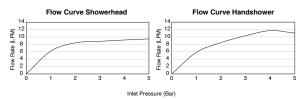


imate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

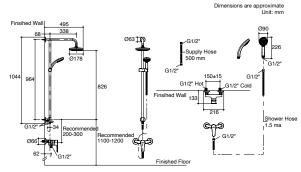




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

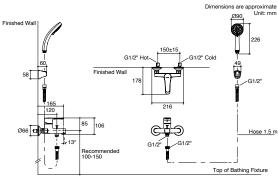

nended dimension for installation can be adjusted according to user preferences and layout

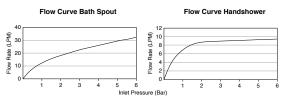

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-7685X-4-CP

July

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Includes 4-way handshower with 1.5 m. hose.
- Lever handle.




K-7685X-ZZ-CP


July

Exposed Wall-Mount Shower Mixer without Hand Shower


- Brass construction.
- Lever handle.

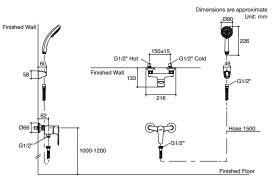

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

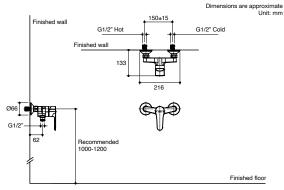





K-R99253X-4CD-CP

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- Easy sealant-free trim installation.

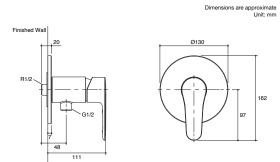

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-16086X-4-BN



K-16086X-4-AF



K-16086X-4-RGD



K-16086X-4-BV

July Stop Valve

• Brass construction.




K-R16086X-4-CP


July Stop Valve

Brass construction.


Dimensions are approximate Unit: mm




ion can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Kumin™ **Bathroom Faucets**



K-98827T-4-CP

Kumin

Single-Hole Lavatory Faucet

- Spout reach: 99 mm.
- Spout height: 93 mm.
- Solid metal construction.
- Coin aerator (easy install & easy clean).
- Includes pop-up drain.
- · Lever handle.



K-98827T-4CD-CP

Kumin

Cold Only Lavatory Faucet


- Spout reach: 99 mm.
- Spout height: 93 mm.
- Solid metal construction.
- Coin aerator (easy install & easy clean).
- Lift and turn handle operation.
- This product meets LEED water conservation requirements.




K-99448T-4-CP

Tall Single-Hole Lavatory Faucet


- Spout reach: 120 mm.
- Spout height: 270 mm.
- Solid metal construction.
- Coin aerator (easy install & easy clean)
- Includes pop-up drain.
- Lever handle.

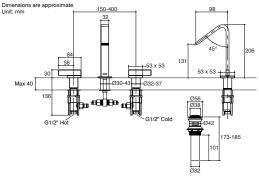


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




ion for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

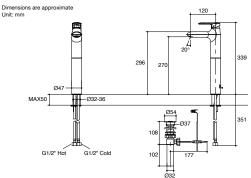

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-99448T-4CD-CP

Tall Cold Only Lavatory Faucet

- Spout reach: 120 mm.
- Spout height: 270 mm.
- Solid metal construction.
- Coin aerator (easy install & easy clean).
- · Lift and turn handle operation.
- This product meets LEED water conservation requirements.



K-99460T-4-CP

Kumin

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 171 mm.
- Solid metal construction.
- Includes single function handshower with 1.5 m. hose.
- · Lever handle.




K-99463T-4-CP


Kumin

Exposed Wall-Mount Shower Mixer


- Solid metal construction.
- Includes single function handshower with 1.5m. hose.
- Lever handle.

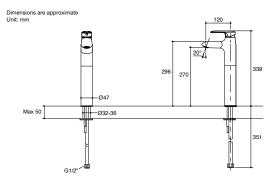


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

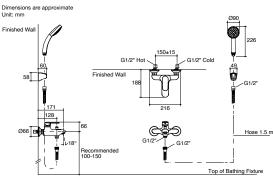


Note: The recommended dimension for installation can be adjusted according to user preferences and layout

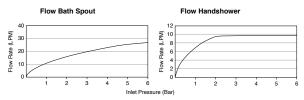

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

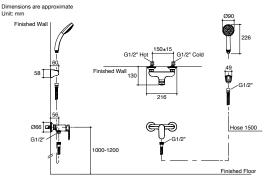

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-99474T-C4-CP

Dual Showerheads Angular Shower Column

- Spout reach: 171 mm.
- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 8" round showerhead with shower column.
- Includes 3-function handshower with bracket.
- · Lever handles.



K-R99978T-4CD-CP

Kumin

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Included ceramic disc valve.
- Easy-sealant and free trim installation.
- · Lift and turn handle.





K-99979T-4CD-CP

Kumin


Recessed Shower Valve-Cold Water Only


- Solid metal construction.
- Leak-free ceramic disk valve.
- Easy, sealant-free trim installation.
- Lift and turn handle operation.

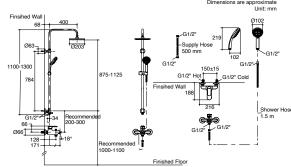




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-24578X-4CD-CP

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-24579X-4CD-CP

Recessed Shower Valve-Cold Water Only

- · Brass construction.
- Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-24576X-4-CP


Kumin

Recessed Bath and Shower Valve Mixer


- Brass construction.
- · Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.

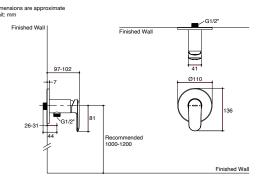


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

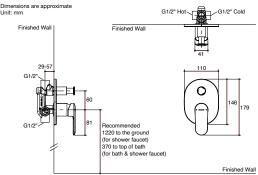

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

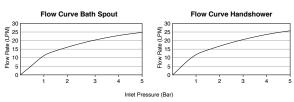





K-24577X-4-CP

Recessed Shower Valve Mixer

- Brass construction.
- Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

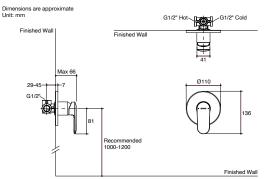

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Loure™ **Bathroom Faucets**



K-14661X-4-CP

Loure

Widespread Lavatory Faucet

- Spout reach: 98 mm.
- Spout height: 131 mm.
- Brass valve bodies.
- Flexible connections for easy installation.
- Includes click drain.
- 8" (203 mm) centers.
- Lever handle.



K-14602X-4-CP

Loure

Wall-Mount Lavatory Faucet


- Spout reach: 202 mm.
- Brass construction.
- Dual control wall-mounted.
- Includes valve and click drain.
- · Lever handles.




K-14660X-4-CP


Single Control Lavatory Faucet

- Spout reach: 135 mm.
- Spout height: 270 mm.
- Brass construction.
- One-piece, self-contained ceramic joystick valve actuation allows both volume and temperature control.
- Flexible hose connection for easy installation.
- Touch-activated drain.
- Joystick lever handle.

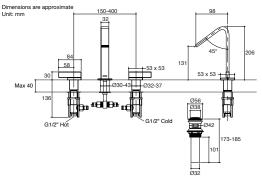





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

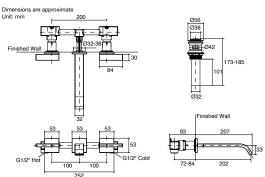


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

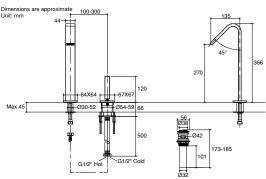

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-14675X-4-CP

Loure

Deck-Mount Bath Faucet

- Spout reach: 149 mm.
- Spout height: 260 mm.
- · Brass valve bodies.
- Non-diverter spout.
- Includes lever handles.



K-8147T-C4-CP *Non-stock item

Loure

Free-Standing Bath Filler Mounting Base

- Spout reach: 167 mm.
- Spout height: 877-897 mm.
- Brass valve bodies.
- Laminar flow for clean aesthetic and reduced splash.
- Includes Shift+ 2-function handshower, push button.
- Separate mounting base facilitates installation (sold separately).

Required Accessories


Free-Standing Bath Filler Mounting Base (K-97904T-NA).




K-97904T-NA


Free-Standing Bath Filler Mounting Base

- Brass construction.
- Sold separately from faucet to enable two-step installation.
- To be used with Kohler free-standing bath filler with handshower.

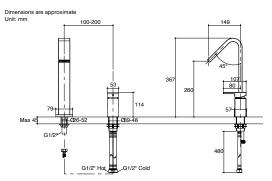




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

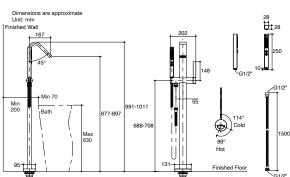



nded dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm







Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-98275T-CL-CP

Loure

14" Ceiling-Mount Showerhead

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- · Optimized sprayface and large nozzles for improved water coverage.
- · Non-drip technology.
- Ultra-slim design.



K-9301T-CL-CP

Loure

14" Katalyst Showerhead, Ultra Slim Square

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.
- · Ultra-slim design.



K-9302T-CL-CP


Loure

12" Katalyst Showerhead, Ultra Slim Square

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- · Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.
- · Ultra-slim design.


Concrete/Wood Ceiling 100-1500






Note: Flow rates are approximate, (1 gallon = 3,785 liters, 1 bar = 14,5 psi)


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Parallel™ **Bathroom Faucets**









K-23472T-4-AF K-23472T-4-RGD K-23472T-4-BL

Parallel

Single-Hole Lavatory Faucet

- Spout reach: 115 mm.
- Spout height: 104 mm.
- Brass construction.
- Directionally adjustable aerator.
- Includes cable drain.
- · Lever handle.









K-23475T-4-CP

K-23475T-4-AF K-23475T-4-RGD K-23475T-4-BL

Tall Single-Hole Lavatory Faucet

- Spout reach: 136 mm.
- Spout height: 209 mm.
- Brass construction.
- Directionally adjustable aerator.
- Includes cable drain.
- · Lever handle.



K-23484T-4-CF



K-23484T-4-RGD



K-23484T-4-AF




K-23484T-4-BL


Parallel

Widespread Lavatory Faucet


- Spout reach: 128 mm.
- Spout height: 133 mm.
- Brass construction.
- Leak-free 1/4 turn ceramic disc valve with lifetime warranty.
- Directionally adjustable aerator.
- Includes pop-up drain
- 128 mm spout reach
- Lever handle(s)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)






Note: Flow rates are approximate, (1 gallon = 3,785 liters, 1 bar = 14.5 psi)

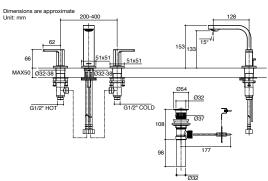

nsion for installation can be adjusted according to user preferences and layout.







K-23494T-4-AF K-23494T-4-RGD K-23494T-4-CP K-23494T-4-BL

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 167-177 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes 3-function handshower.
- Lever handle.

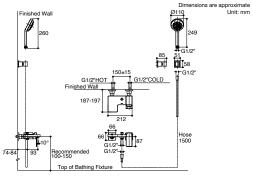



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-23493T-4-CP K-23493T-4-AF K-23493T-4-RGD K-23493T-4-BL

Parallel

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Includes 3-function handshower.
- · Lever handle.

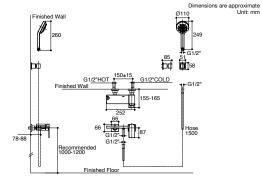




Note: Flow rates are approximate. (1 gallon = 3.785 liters. 1 bar = 14.5 psi)




Parallel

3 Hold Deck-Mount Bath Faucet with Handshower

- Spout reach: 209 mm.
- Spout height: 101 mm.
- · Brass construction.
- Directionally adjustable aerator.
- Includes 2-function handshower.
- Lever handle.

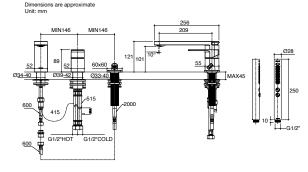




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Parallel

Wall-Mount Lavatory Faucet (Long Spout)

- Spout reach: 218 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- · Includes click drain.
- Lever handle.

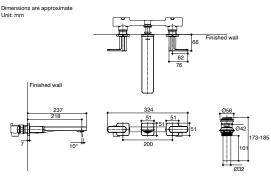

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Parallel


Free-Standing Bath Filler

- Spout reach: 221 mm.
- Spout height: 782-802 mm.
- Brass construction.
- Directionally adjustable aerator.
- Includes 2-function handshower.
- · Lever handle.
- Required Accessories

Free-Standing Bath Filler Mounting Base (K-97905T-NA)

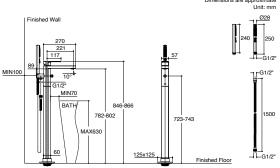

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97905T-NA

Free-Standing Bath Filler Mounting Base

- Brass construction.
- Sold separately from faucet to enable twostep installation.
- To be used with Kohler free-standing bath filler with handshower.

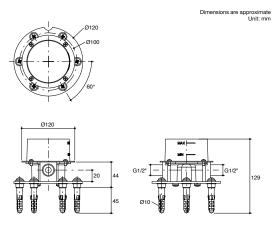

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-22645X-BL

Parallel

Square Showerhead with Shower Arm

- Brass construction (shower arm).
- 127 mm. square spray-plate.
- Includes click drain.
- R1/2" thread connection(s).
- Includes shower arm.



K-23472T-4E2-CP

Parallel

Single Handle Lavatory Faucet

- Spout reach: 115 mm.
- Spout height: 104 mm.
- Brass construction.
- Directionally adjustable aerator.
- Includes cable drain.
- Lever handle.




K-23472T-4CD-CP


Parallel

Cold Water Lavatory Faucet

- Spout reach: 115 mm.
- Spout height: 104 mm.
- Brass construction.
- Directionally adjustable aerator.
- Lever handle.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-23475T-4CD-CP

Parallel

Tall Cold Water Lavatory Faucet

- Spout reach: 136 mm.
- Spout height: 209 mm.
- Brass construction.
- Directionally adjustable aerator.
- · Lever handle.



K-23485T-B4-CP

Parallel

Wall-Mount Lavatory Faucet (Short Spout)

- Spout reach: 165 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- · Includes click drain.
- Lever handle.
- Required Accessories

Single Handle Wall-Mount Lavatory Faucet Valve (K-28028T-NA).



K-22567T-B4-CP


Parallel

Wall-Mount Lavatory Faucet (Long Spout)


- Spout reach: 215 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes click drain.
- Lever handle.

• Required Accessories


Single Handle Wall-Mount Lavatory Faucet Valve (K-28028T-NA).




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

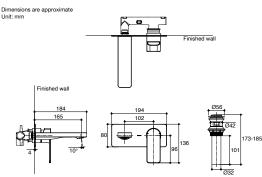


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

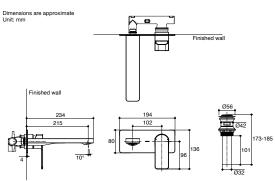

Note: The recommended dimension for installation can be adjusted according to user preferences and layout





Parallel

Wall-Mount Lavatory Faucet (Short Spout)

- Spout reach: 168 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes click drain.
- Lever handle.
- Required Accessories

Single Handle Wall-Mount Lavatory Faucet Valve (K-28028T-NA).



K-28028T-NA

Single Handle Wall-Mount Lavatory Faucet Valve

• Brass Construction.





K-23491T-4-CP

Parallel


Wall-Mount 2 Handle Bath Faucet, 2 Handles


- Spout reach: 229 mm.
- Brass construction.
- Concealed aerator and key.
- Lever handle.

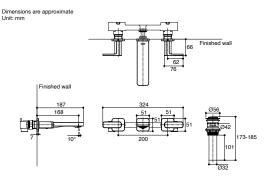




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

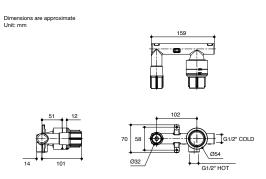




nate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

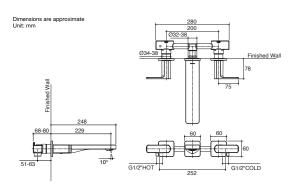

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Singulier™ Bathroom Faucets



K-10860X-4-CP

Singulier

Single-Hole Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 99 mm.
- Brass construction.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Flexible connections for easy installation.
- Includes pop-up drain with lift rod and tailpiece.
- Lever handle.



K-10860X-4CD-CP

Singulie

Cold Only Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 99 mm.
- Brass construction.
- Flow is controlled to meet 30% reduction LEED credit
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Lever handle.




K-10861X-4-CP


Singulier

Tall Single-Hole Lavatory Faucet


- Spout reach: 130 mm.
- Spout height: 240 mm.
- Brass construction.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Flexible connections for easy installation.
- Touch-activated drain.
- Lever handle.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-10868T-B4-CP

Singulier

Deck-Mount Bath and Shower Faucet with Handshower and Diverter

- Spout reach: 185 mm.
- Spout height: 61 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes handshower hose 1.5 m.
- Includes Shift+ 2-function handshower, push button.
- Lever handle.



K-72669X-4-CP

Singulier

Wall-Mount Shower Faucet

- Brass construction.
- Includes handshower with bracket.
- · Lever handle.
- Includes handshower hose 1.5 m.




K-R99254X-4CD-CP


Singulier

Wall-Mount Shower Valve-Cold Water Only


- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- Easy sealant-free trim installation.

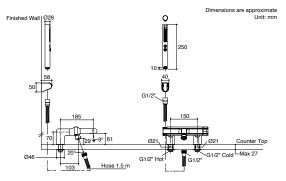


nded dimension for installation can be adjusted acco



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



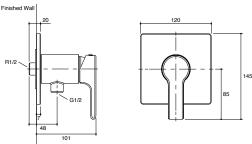



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-99258X-4CD-CP

Singulier

Recessed Shower Valve-Cold Water Only


- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- · Easy sealant-free trim installation.




K-R11711X-4-CP

Singulier Stop Valve

• Brass construction.

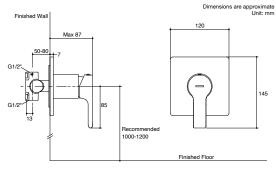


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Stance™ Bathroom Faucets



K-76696T-B4-CP


Stance

Deck-Mount Bath and Shower Faucet with Handshower and Diverter

- Spout reach: 184 mm.
- Spout height: 138 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Includes Shift+ 2-function handshower, push button.
- Lever handle.

Dimensions are approximate Unit: mm

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

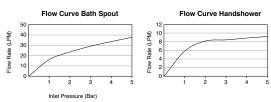

Strayt™ **Bathroom Faucets**



K-37327X-4-CP

Strayt

Single-Hole Lavatory Faucet

- Spout reach: 103 mm.
- Spout height: 97 mm.
- Brass construction.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Flexible connections for easy installation.
- Includes pop-up drain with lift rod and tailpiece.
- Lever handle.



K-37327X-4CD-CP

Cold Only Lavatory Faucet

- Spout reach: 104 mm.
- Spout height: 97 mm.
- Brass construction.
- This product meets LEED water conservation requirements.
- · Lever handle.




K-37329T-B4-CP


Strayt

Tall Single-Hole Lavatory Faucet


- Spout reach: 131 mm.
- Spout height: 240 mm.
- Brass construction.
- Concealed, easy-clean aerator and key.
- Includes click drain.
- · Lever handle.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-37329X-4CD-CP

Strayt

Tall Cold Only Lavatory Faucet

- Spout reach: 131 mm.
- Spout height: 240 mm.
- Brass construction.
- This product meets LEED water conservation requirements.
- · Lever handle.



K-37331X-4-CP

Strayt

Widespread Lavatory Faucet

- Spout reach: 135 mm.
- Spout height: 115 mm.
- Brass construction.
- Includes pop-up drain with lift rod and tailpiece.
- Lever handle.
- Flexible connections for easy installation.




K-37337T-B4-CP


Strayt

Deck-Mount Bath And Shower Faucet With Handshower And Diverter


- Spout reach: 217 mm.
- Spout height: 150 mm.
- Brass construction.
- Concealed, easy-clean aerator.
- Includes Shift+ 2-function handshower, push button.
- Lever handle.

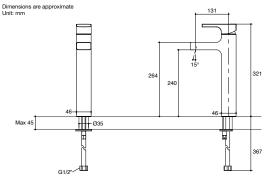


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

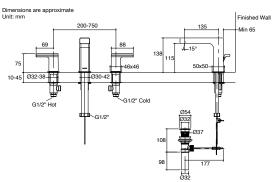


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

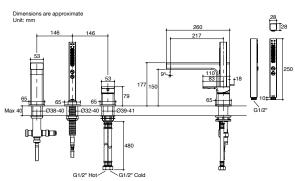

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-29677X-CP

Strayt

Dual Showerhead Angular Shower Column

- Brass construction
- Optimized sprayface and large nozzles for improved water coverage.
- Includes 10" ultra thin square Katalyst Air Rainhead.
- Includes Rain Duet push button, 3-function handshower
- Includes 1.5 m. PVC shower hose.
- · Lever handle.



K-45372X-C4-CP

Dual Showerheads Angular Shower Column

- Reach: 134 mm.
- · Brass construction.
- Includes 10" square showerhead and shower column.
- Includes handshower with 1.5 m hose and bracket.




K-45370T-B4-CP


Strayt

Exposed Wall-Mount Bath and Shower Mixer


- Brass construction.
- Concealed, easy-clean aerator.
- Includes Shift+ 2-function handshower, push button.
- Adjustable inlet fittings with 15 mm. tolerance.
- Lever handle.
- Includes 1.5 m shower hose.

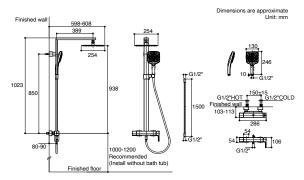


nended dimension for installation can be adjusted according to user preferences and layout




mate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

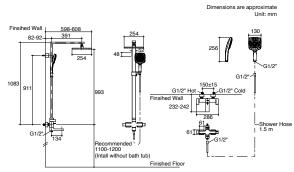




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

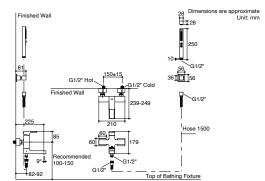

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-45371T-B4-CP

Strayt

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Includes Shift+ 2-function handshower, push button.
- Adjustable inlet fittings with 15 mm. tolerance.
- Lever handle.
- Includes 1.5 m shower hose.



K-37343X-CP

Strayt
Bath Spout with Diverter


- Spout reach: 160 mm.
- Brass construction.




K-37344X-CP

Strayt Bath Spout


- Spout reach: 160 mm.
- Brass construction.

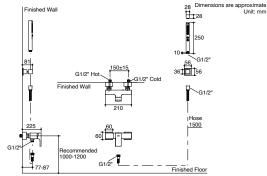


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-99255X-4CD-CP


Strayt

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- Easy sealant-free trim installation.

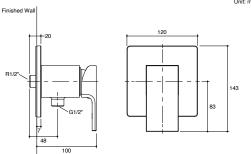

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Taut™ Bathroom Faucets





K-74013X-4-CP

K-74013T-4-BL

Taut

Single-Hole Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 89 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes pop-up drain.
- · Lever handle.



K-74013X-4CD-CP

K-74013T-4CD-BL

Taut

Cold Only Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 89 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- Lever handle.




Taut


Tall Single-Hole Lavatory Faucet

- Spout reach: 120 mm.
- Spout redon: 720 mm.
 Spout height: 202 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes pop-up drain.
- Lever handle.

Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



032^{† †}

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-74026T-4CD-BL

Tall Cold Only Lavatory FaucetSpout reach: 120 mm.

- Spout height: 202 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- Lever handle.



K-74046T-BL

Taut

Bath Spout

- Spout reach: 200 mm.
- Brass construction.
- · Coin aerator allows for easy cleaning and maintenance.




K-74046X-B-CP


Taut

Bath Spout


- Spout reach: 162 mm.
- · Brass construction.
- Coin aerator allows for easy cleaning and maintenance.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

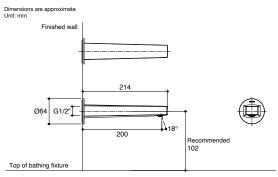


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Taut

Shower Column

- Solid metal construction.
- Includes wall bracket and mounting fasteners suitable for various wall types.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 3-function handshower and diverter.
- · Lever handle.
- Includes 8" round showerhead.



Taut

Exposed Wall-Mount Bath and Shower Mixer


- Spout reach: 128 mm.
- Solid metal construction.
- Includes handshower (K-74036T-4-CP).
- Includes 5-function handshower (K-74036T-4-BL).
- Lever handle.




Taut

Exposed Wall-Mount Shower Mixer


- Solid metal construction.
- Includes handshower.
- Includes 5-function handshower.
- Lever handle.

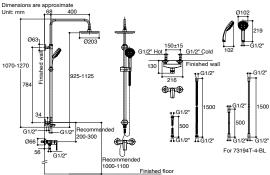


Note: The recommended dimension for installation can be adjusted according to user preferences and lavour

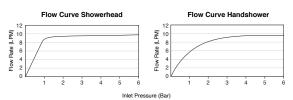


ote: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

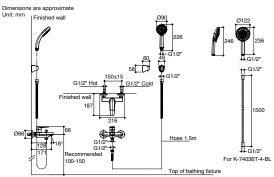


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

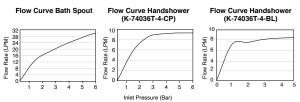

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

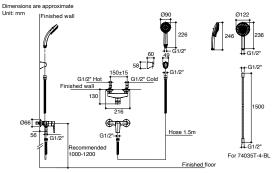

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

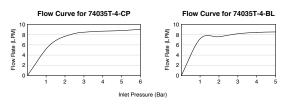

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-73195T-4-CP

Exposed Wall-Mount Shower Mixer without Hand Shower

- Solid metal construction.
- Lever handle.



K-74027X-B4-CP

Taut

Wall-Mount Lavatory Faucet

- Spout reach: 162 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes click drain.
- Lever handle.




K-24572X-4-CP

Taut


Recessed Bath and Shower Valve Mixer

- · Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

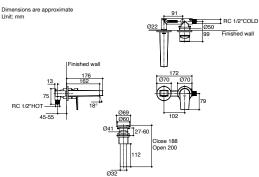


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



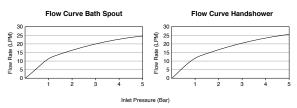



K-24573X-4-CP

Recessed Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-24574X-4CD-CP

Taut

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-24575X-4CD-CP

Recessed Shower Valve-Cold Water Only

- · Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.


Dimensions are approximate Unit: mm Finished Wall Finished Wall 29-45

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm Finished Wall




for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

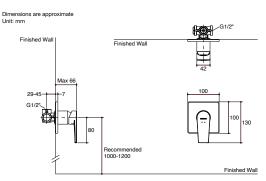

lation can be adjusted according to user prefere





K-74096T-4CD-CP

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Easy, sealant-free trim installation.
- Lever handle.




K-73193T-4CD-CP


Taut

Recessed Shower Valve-Cold Water Only


- Brass construction.
- Metal mounting hardware assures a secure installation.
- Easy, sealant-free trim installation.
- Lever handle.

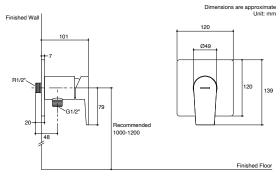


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

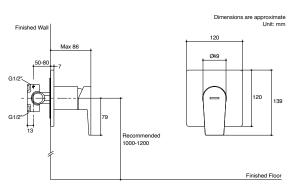

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Taut™with Pin Handle Bathroom Faucets



K-74013X-4A-CP

Taut

Single-Hole Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 89 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes pop-up drain.
- Lever handle.



K-74013X-4ACD-CP

Taut

Cold Only Lavatory Faucet

- Spout reach: 100 mm.
- Spout height: 89 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- Lever handle.




K-74026X-4A-CP

Taut


Tall Single-Hole Lavatory Faucet

- Spout reach: 120 mm.
- Spout height: 203 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes pop-up drain.
- · Lever handle.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout





K-74026X-4ACD-CP

Tall Cold Only Lavatory Faucet

- Spout reach: 120 mm.
- Spout height: 203 mm.
- Solid metal construction.
- Coin aerator allows for easy cleaning and maintenance.
- · Lever handle.



K-74035X-4A-CP

Taut

Exposed Wall-Mount Shower Mixer

- Solid metal construction.
- Includes handshower.
- Lever handle.
- Adjustable inlet fittings with 15 mm. tolerance.




K-74036X-4A-CP


Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 177 mm.
- Solid metal construction.
- Includes handshower.
- · Lever handle.
- Adjustable inlet fittings with 15 mm. tolerance.


Dimensions are approximate Unit: mm




nstallation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




sion for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout

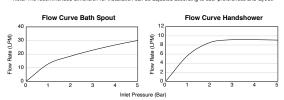



K-73194X-4A-CP

Shower Column

- Solid metal construction.
- Includes wall bracket and mounting fasteners suitable for various wall types.
- Katalyst air-induction technology for powerful and even coverage.
- Includes handshower and diverter.
- · Lever handle.
- Includes 8" round showerhead.



K-24572X-4A-CP

Taut

Recessed Bath and Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.




K-24573X-4A-CP


Taut

Recessed Shower Valve Mixer


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

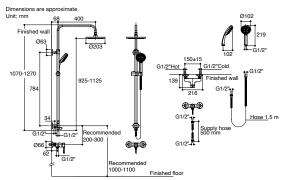


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

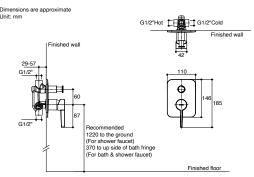


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

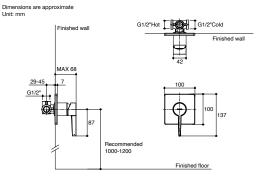

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-24574X-4ACD-CP

Wall-Mount Shower Valve-Cold Water Only


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-24575X-4ACD-CP

Recessed Shower Valve-Cold Water Only


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





KOHLER_®

Sensor Faucet

A wide selection of KOHLER Touchless Bathroom Faucets provide touch-free, convenient and safe products for families. Available in both single control and dual widespread as well as pull-out and non-pull-out, in multiple price ranges for various installation environments and consumer needs.



Touchless Operation



Invisible Sensor Technology



TOF Sensor



Perfect Coordination



Automatic Shutoff



Water Saving



More Hygienic



Easy Installation



K-26799X-CP




Invisible Sensor Technology




Powered by AA Batteries

- Components
- Widespread Touchless
- Lavatory Faucet
- Spout reach: 160 mm.
- Spout height: 170 mm.
- Rocker faucet handle features a unique back and forth movement with smooth control allows for both volume and temperature preset.
- Easy to install with the use of AA batteries.
- Automatically stop when used continuous more than 4 minute.
- Key electronic components all passed waterproof standard IPX4.

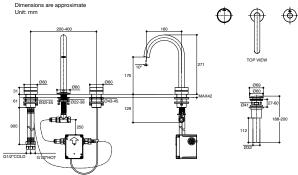

Note: The recommended dimension for installation can be adjusted according to user preferences and layou



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-29936X-CP




TOF Sensor Technology


Avid

Duo Sensor Faucet-Cold AC, W/P, 0.5

- Spout reach: 135 mm.
- Spout height: 123 mm.
- Kohler cutting-edge technology combines soap and water dispensing into one design for a completely touchless hand-rinsing experience.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- LED lights indicate waving.
- Durable Kohler finishes resist corrosion and tarnishing.
- Automatically stop when used continuous more than 1 minute.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-28577X-NW-CP



TOF Sensor Technology



Loure

Tall Sensor Faucet Cold, 0.5GPM

- Spout reach: 127 mm.
- Spout height: 270 mm.Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and
- stainless steel.


 Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- Automatically stop when used continuous more than 1 minute.

• Required Accessories


AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

· Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-98454X-NW-CP



TOF Sensor Technology



Invisible Sensor

Loure

Deck-Mount Sensor Faucet Cold, 0.5GPM


- · Spout reach: 98 mm.
- Spout height: 137 mm.
- · Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- Automatically stop when used continuous more than 1 minute.


Required Accessories

AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.

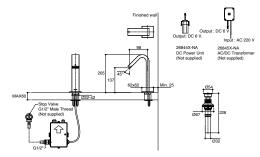



allon = 3.785 liters, 1 bar = 14.5 psi

Loure

Wall-Mount Sensor Faucet Cold, 0.5GPM


- Spout reach: 207 mm.
- Spout height: 159 mm.
- · Brass construction.
- · ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- Automatically stop when used continuous more than 1 minute.

• Required Accessories


AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.

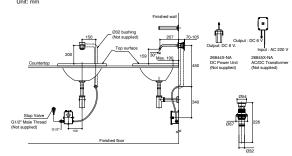

nmended dimension for installation can be adjusted according to user p



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

K-98452X-NW-CP





Components

Deck-Mount Sensor Faucet Cold, 0.5GPM


- Spout reach: 168 mm.
- Spout height: 174 mm.
- · Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- · Automatically stop when used continuous more than 1 minute.

• Required Accessories


AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.

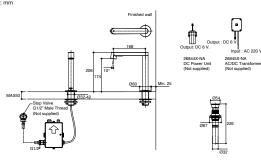

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-EX27460X-NW-CP



Technology





K-EX27462X-NW-CP



TOF Sensor Technology



Components

Wall-Mount Sensor Faucet Cold, 0.5GPM


- Spout reach: 241 mm.
- Spout height: 176 mm.
- Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- Automatically stop when used continuous more than 1 minute.

Required Accessories

AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.



= 3.785 liters, 1 bar = 14.5 psi)

Composed

Deck-Mount Sensor Faucet Cold, 0.5GPM


- Spout reach: 149 mm.
- Spout height: 123 mm.
- Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- · Automatically stop when used continuous more than 1 minute.


Required Accessories

AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.

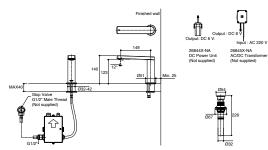



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

TOF Sensor Technology

K-EX20257X-NW-CP



Composed

Wall-Mount Sensor Faucet Cold, 0.5GPM


- Spout reach: 215 mm.
- Spout height: 194 mm.
- Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- · Automatically stop when used continuous more than 1 minute.

Required Accessories

AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.



on = 3.785 liters. 1 bar = 14.5 psi)



K-EX25998X-NW-CP









K-20012X-W-CP



Finial

Deck-Mount Sensor Faucet Cold, 0.5GPM

- Spout reach: 122 mm.
- Spout height: 116 mm.
- Brass construction.
- 1000 mm. flexible supply hose for easy installation.
- Automatically stop when used continuous more than 1 minute.

Required Accessories


AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.

MAXS0 Start Value Class Value

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

K-72866X-NW-CP





Strayt

Deck-Mount Sensor Faucet Cold, 0.5GPM


- Spout reach: 133 mm.
- Spout height: 115 mm.
- · Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- Automatically stop when used continuous more than 1 minute.

Required Accessories


AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

· Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.

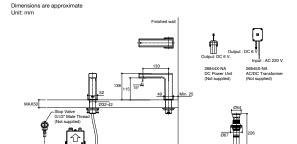

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-18655X-NW-CP



Kumin

Deck-Mount Sensor Faucet Cold, 0.5 GPM


- Spout reach: 135 mm.
- Spout height: 93 mm.
- Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- · Strong anti-interference ability.
- 1000 mm. flexible supply hose for easy installation.
- Automatically stop when used continuous more than 1 minute.

Required Accessories


AC Power unit, Output 6 V (K-26845X-NA) or DC power unit, output 6 V (K-26844X-NA), sold separately.

· Can be paired with

Thermostatic Valve (K-16294X-3-CP) or Tee Inlet Hose Assembly (K-1298745-SP) to become a mixer, sold separately.

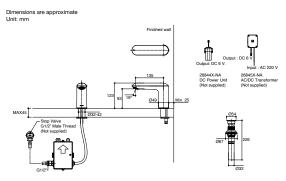

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-26845X-NA

AC Power Unit, Output 6 V

- Body dimension 72 x 55 x 28 mm.
- Input voltage AC 220V 50/60 Hz and Output Voltage DC 6V.
- Save the trouble of replacing batteries.
- Connecting wire DC voltage maximum length 10 m.


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm








Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm

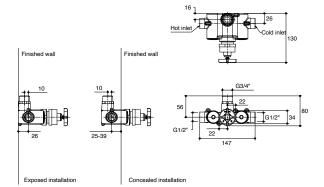

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

DC Power Unit

- Body dimension 47 x 37 x 73 mm.
- Input Voltage DC 4 AA alkaline batteries.
- Output Voltage DC 6V



K-26844X-NA

K-16294X-3-CP

Thermostatic Valve

- Brass construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Maximum 4 sensor faucets supplied by one thermostat valve when system water pressure is above 0.3 MPa (3 bar).



Tee Hose Assy

· Optional part to change cold-only faucet to mixer faucet.

K-1298745-SP





K-EX25421X-CP



Technology



Composed


Wall-Mount Foam Soap Dispenser

- · Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- Strong anti-interference ability.
- Maintenance/cleaning mode is activated for 30 seconds every 24 hours.
- LED indicator for low soap and low power indicator.
- Sensor range and soap dispensing volume can be

Required Accessories

Soap AC Power Unit, Output 6 V (K-27321X-NA) or Soap DC Power Unit, Output 6 V (K-27320X-NA), sold separately.

Dimensions are approximate Unit: mm

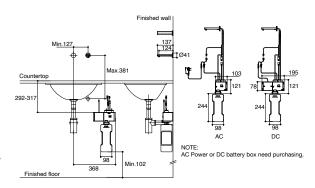

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-EX34060X-CP





Composed


Deck-Mount Foam Soap Dispenser

- Brass construction.
- ToF sensing technology, able to work with special material lavatories like glass and stainless steel.
- · Strong anti-interference ability.
- Maintenance/cleaning mode is activated for 30 seconds every 24 hours.
- · LED indicator for low soap and low power indicator.
- Sensor range and soap dispensing volume can be

Required Accessories

Soap AC Power Unit, Output 6 V (K-27321X-NA) or Soap DC Power Unit, Output 6 V (K-27320X-NA), sold separately.

Dimensions are approximate Unit: mm

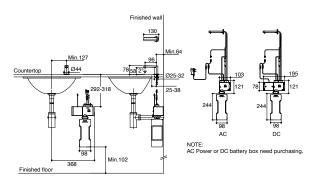

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Battery Powered

Bardon

Soap Dispenser

- Input voltage 4 pcs of Alkaline AA (1.5 V).
- LED indicator during soap dispensing.
- LED indicator for low soap and low power indicator.

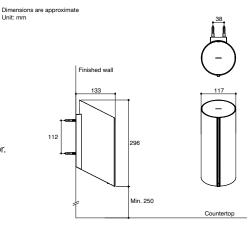


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-27321X-NA

- Soap AC Power Unit, Output DC 6 V
 Input voltage AC 220V 50/60 Hz Output voltage DC 6V.
- Save the trouble of replacing batteries.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-27320X-NA

Soap DC Power Unit, Output 6 V • Output voltage DC 6V





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





0



K-30941X-2W-CP

K-30941X-2W-BN

Beam Eco

Urinal Sensor, 0.5/1L

- Metal chrome panel, into the wall design, exquisite atmosphere.
- Used with AC Power Unit 220V 50/60Hz or DC Power unit 3V.
- · Flushing after used.
- Manually wash with magnatic stick, easy to clean and maintain.

• Required Products/Accessories

K-16306X-NA AC Power Unit

K-29184X-NA DC Power Unit, Output 3V (AA)

Recommended Products

K-4986X-ER Steward eco urinal, rear inlet


K-4991X-ER Bardon 0.5L eco urinal, rear inlet

K-4991X-ET Bardon 0.5L eco urinal, top inlet

K-18645X-Y Patio eco urinal, rear inlet K-5889X-2ER Struktura floor standing urinal rear inlet

K-5777X-2ER Struktura wall hung urinal rear inlet

Dimensions are approximate Unit: mm

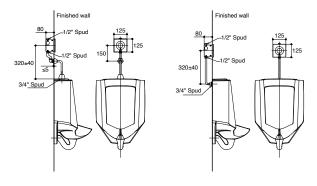

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-30941X-2-CP

Beam

Urinal Sensor, 2.5L

- Metal chrome panel, into the wall design, exquisite atmosphere.
- Used with AC Power Unit 220V 50/60Hz or DC Power unit 3V.
- Dual Flushing.
- Manually wash with magnatic stick, easy to clean and maintain.

Required Products/Accessories

K-16306X-NA AC Power Unit

K-29184X-NA DC Power Unit, Output 3V (AA)

• Recommended Products

K-4991X-ER Bardon 0.5L eco urinal, rear inlet


K-4991X-ET Bardon 0.5L eco urinal, top inlet

K-18645X-Y Patio eco urinal, rear inlet

K-5889X-2ER Struktura floor standing urinal rear inlet

K-5777X-2ER Struktura wall hung urinal rear inlet

Dimensions are approximate

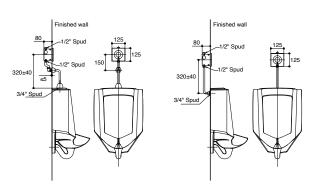

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Emerg

K-45213X-2W-CP

Patio Eco Override Urinal Sensor, 0.5/1L

- Metal chrome panel, into the wall design, exquisite atmosphere.
- Used with AC Power Unit 220V 50/60Hz or DC Power unit 3V.
- Flushing after used.
- Manually wash with button or magnatic stick, easy to clean and maintain.

Required Products/Accessories

K-16306X-NA AC Power Unit

K-29184X-NA DC Power Unit, Output 3V (AA)

• Recommended Products

K-4986X-ER Steward eco urinal, rear inlet

K-4991X-ER Bardon 0.5L eco urinal, rear inlet


K-4991X-ET Bardon 0.5L eco urinal, top inlet

K-18645X-Y Patio eco urinal, rear inlet

K-5889X-2ER Struktura floor standing urinal rear inlet

K-5777X-2ER Struktura wall hung urinal rear inlet

Dimensions are approximate Unit: mm

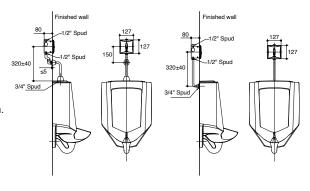

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-8791X-2W-CP

Patio Eco

Urinal Sensor, 0.5/1L

- Metal chrome panel, into the wall design, exquisite atmosphere.
- Used with AC Power Unit 220V 50/60Hz or DC Power unit 3V.
- Flushing after used.
- Manually wash with magnatic stick, easy to clean and maintain.

Required Products/Accessories

K-16306X-NA AC Power Unit

K-29184X-NA DC Power Unit, Output 3V (AA)

Recommended Products

K-4986X-ER Steward eco urinal, rear inlet


K-4991X-ER Bardon 0.5L eco urinal, rear inlet

K-4991X-ET Bardon 0.5L eco urinal, top inlet

K-18645X-Y Patio eco urinal, rear inlet

K-5889X-2ER Struktura floor standing urinal rear inlet

K-5777X-2ER Struktura wall hung urinal rear inlet

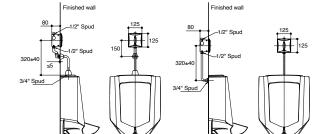



K-20368X-2W-CP

New Patio Eco

Urinal Sensor, 0.5/1L

- Metal chrome panel, into the wall design, exquisite atmosphere.
- Used with AC Power Unit 220V 50/60Hz or DC Power unit 3V.
- Flushing after used.
- Manually wash with magnatic stick, easy to clean and maintain.

• Required Products/Accessories

K-16306X-NA AC Power Unit

K-29184X-NA DC Power Unit, Output 3V (AA)

Recommended Products

K-4986X-ER Steward eco urinal, rear inlet

K-4991X-ER Bardon 0.5L eco urinal, rear inlet

K-4991X-ET Bardon 0.5L eco urinal, top inlet


K-18645X-Y Patio eco urinal, rear inlet

K-5889X-2ER Struktura floor standing urinal rear inlet

K-5777X-2ER Struktura wall hung urinal rear inlet

Dimensions are approximate Unit: mm

Dimensions are approxim Unit: mm

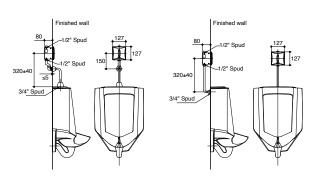

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-8872X-2W-CP

Mini Eco

Urinal Sensor, 0.5/1L

- Metal chrome panel, into the wall design, exquisite atmosphere.
- Used with AC Power Unit 220V 50/60Hz or DC Power unit 3V.
- Flushing after used.
- Manually wash with magnatic stick, easy to clean and maintain.

Required Products/Accessories

K-16306X-NA AC Power Unit

K-29184X-NA DC Power Unit, Output 3V (AA)

• Recommended Products


K-4986X-ER Steward eco urinal, rear inlet

K-4991X-ER Bardon 0.5L eco urinal, rear inlet

K-18645X-Y Patio eco urinal, rear inlet

K-5889X-2ER Struktura floor standing urinal rear inlet

K-5777X-2ER Struktura wall hung urinal rear inlet

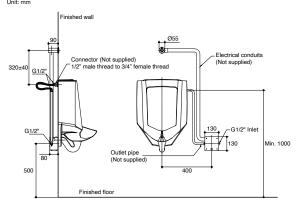




K-16306X-NA

AC Power Unit

- Input voltage AC 220V 50/60Hz and Output voltage DC 3V
- AC power supply box for one sensor or two sensors use
 Save the trouble of replacing batteries
 Connecting wire DC voltage maximum length 10m.

- Protection Degree IP24

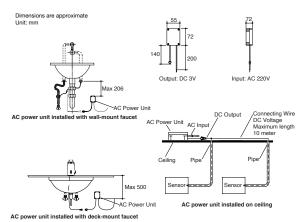



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-29184X-NA DC Power Unit, Output 3V(AA)

Output Voltage DC 3V



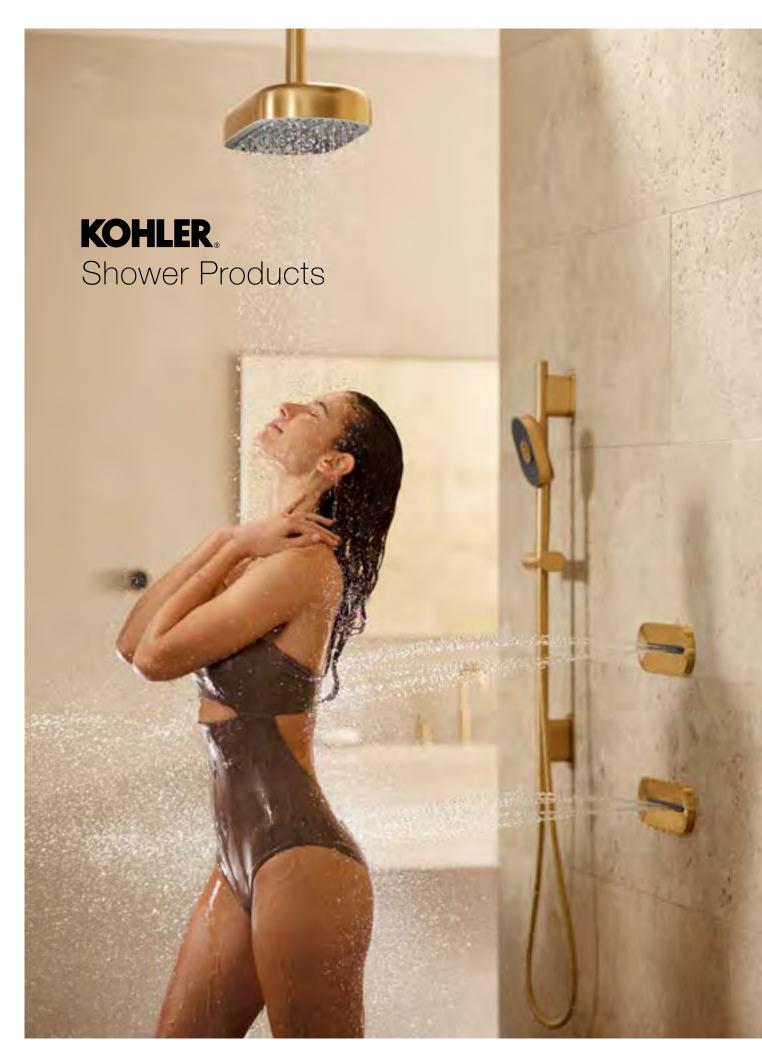




Anthem™ Valves & Controls

Anthem represents the evolution of showering.

Born from a mission to go beyond industry standards, Anthem mechanical and digital valves and controls enable superior showering performance. From expert engineering and technical exclusivity, new and innovative ways to manipulate flow, temperature, and water have been brought to life. Combined with precision controls, the functional act of showering has at once become a highly personalized wellbeing experience. Captured in an unexpected aesthetic, the Anthem collection represents a milestone in showering design and overall experience.

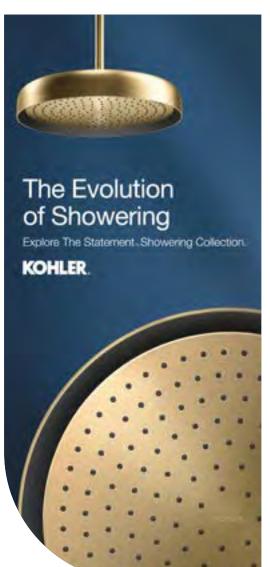

Statement™ Spray Experiences With a variety of inclulgent spray functions, the Statement showering

collection helps you build immersive environments for rinsing, massaging, and restoring. Each component is paired with the sprays best suited to its use, expertly aligning form with function. From the flow to the arrangement of streams, the settings have been thoughtfully engineered to deliver transformational moments of wellbeing in every shower.



Full Coverage with Katalyst™ Technology

With air-infused droplets, the flow of water is intensified for enhanced coverage and comfort. It drenches and clings to the body in a full, luxurious spray.



Deep Massage

Strong streams of water twist and swirl to create a slow kneading pattern. The rhythmic massaging delivers relaxation and relief.



Ribbon Massage

Water cascades at an angled stream to target the shoulders. This improved alignment offers greater warmth, comfort, and a more relaxing massage.



Cloud Spray

Super-fine, silken droplets converge to gently caress the body. The expansive, luxurious spray feels like a warm embrace as it restores a sense of wellbeing.



Full Coverage Rain

Gravity-fed droplets envelop the body in a gentle spray. The soft flow of water has a natural feel, mimicking the experience of real rainfall.



Infinity

Interlaced water streams create three experience zones in a single spray. The droplets closest to the nozzle rinse, while the middle zone massages, and the farthest stream provides coverage.

Anthem™ Valves and Controls



K-26340X-NA


Anthem

Recessed Mechanical Thermostatic Valve 2 Outlet


- DZR brass construction.
- G3/4" inlet thread connection(s).
- G1/2" outlet thread connection(s).
- Mechanically controlled thermostatic mixing valve.

• Required Accessories

Anthem Recessed Mechanical Thermostatic Control 2 Outlet (K-26346T-9).

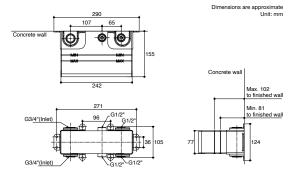

Note: The recommended dimension for installation can be adjusted according to user preferences and layout

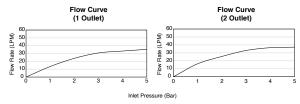


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Anthem

Recessed Mechanical Thermostatic Control 2 Outlet

- Solid metal construction.
- Low-profile design with easy-to-clean water-resistant casing.
- Install with recessed thermostatic valve 2-way (K-26340X).
- Precise thermostatic temperature control with over-ridable temperature stop.
- Pressed button once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment. Pressed button back in, water turns off.
- Function indicator on faceplate for Hand Shower and Katalyst shower head

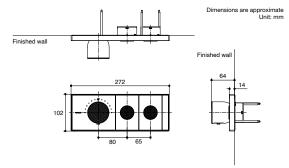

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-26341X-NA


Anthem

Recessed Mechanical Thermostatic Valve 3 Outlet


- DZR brass construction.
- G3/4" inlet thread connection(s).
- G1/2" outlet thread connection(s).
- Mechanically controlled thermostatic mixing valve.

• Required Accessories

Anthem Recessed Mechanical Thermostatic Control 3 Outlet (K-26347T-9).

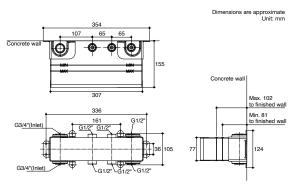

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.









K-26347T-9-CP

K-26347T-9-AF

K-26347T-9-RGD





K-26347T-9-BL

K-26347T-9-2MB

Anthem

Recessed Mechanical Thermostatic Control 3 Outlet

- · Solid metal construction.
- Low-profile design with easy-to-clean water-resistant casing.
- Install with recessed thermostatic valve 3-way (K-26341X).
- Precise thermostatic temperature control with over-ridable temperature stop.
- Pressed button once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment. Pressed button back in, water turns off.
- Function indicator on faceplate for Hand Shower and Katalyst shower head.
- Function indicator on faceplate for Deep massage shower head or Body spray.



K-26342X-NA


Anthem

Recessed Mechanical Thermostatic Valve 4 Outlet


- DZR brass construction.
- G3/4" inlet thread connection(s).
- G1/2" outlet thread connection(s).
- Mechanically controlled thermostatic mixing valve.


Required Accessories

Anthem Recessed Mechanical Thermostatic Control 4 Outlet (K-26348T-9).

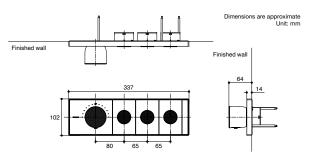

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

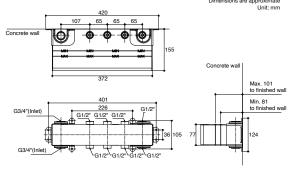



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-26348T-9-RGD






K-26348T-9-BL K-26348T-9-2MB

Anthem

Recessed Mechanical Thermostatic Control 4 Outlet

- Solid metal construction.
- Low-profile design with easy-to-clean water-resistant casing.
- Install with recessed thermostatic valve 4-way (K-26342X).
- Precise thermostatic temperature control with over-ridable temperature stop.
- Pressed button once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment. Pressed button back in, water turns off.
- Function indicator on faceplate for Hand Shower and Katalyst shower head.
- Function indicator on faceplate for Deep massage shower head or Body spray.
- Function indicator on faceplate for Waterfall or Laminar.

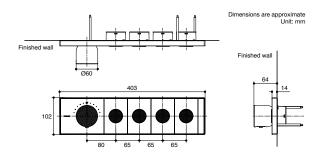

Note: The recommended dimension for installation can be adjusted according to user preferences and lay



K-26343X-NA


Anthem

Recessed Mechanical Thermostatic Valve 5 Outlet


- DZR brass construction.
- G3/4" inlet thread connection(s).
- G1/2" outlet thread connection(s).
- · Mechanically controlled thermostatic mixing valve.

• Required Accessories

Anthem Recessed Mechanical Thermostatic Control 5 Outlet (K-26349T-9).

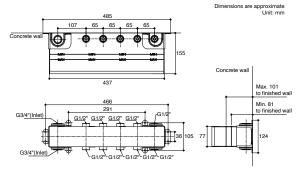

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



A COURT


K-26349T-9-BL

K-26349T-9-2MB

Anthem

Recessed Mechanical Thermostatic Control 5 Outlet

- Solid metal construction.
- · Low-profile design with easy-to-clean water-resistant casing.
- Install with recessed thermostatic valve 5-way (K-26343X).
- Precise thermostatic temperature control with over-ridable temperature stop.
- Pressed button once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment. Pressed button back in, water turns off.
- Function indicator on faceplate for Hand Shower and Katalyst shower head.
- Function indicator on faceplate for Deep massage shower head or Body spray.
- Function indicator on faceplate for Waterfall or Laminar.

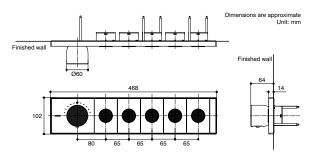

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-26344X-NA


Anthem

Recessed Mechanical Thermostatic Valve 6 Outlet


- DZR brass construction.
- G3/4" inlet thread connection(s).
- G1/2" outlet thread connection(s).
- Mechanically controlled thermostatic mixing valve.

Required Accessories

Anthem Recessed Mechanical Thermostatic Control 6 Outlet (K-26350T-9).

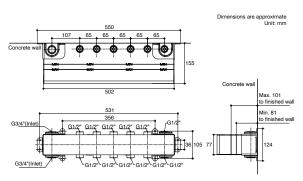

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-26350T-9-BL

K-26350T-9-2MB

Anthem

Recessed Mechanical Thermostatic Control 6 Outlet

- Solid metal construction.
- Low-profile design with easy-to-clean water-resistant casing.
- Install with recessed thermostatic valve 5-way (K-26344X).
- Precise thermostatic temperature control with over-ridable temperature stop.
- Pressed button once, shower outlet turns on and button pops out, becoming a knob for water flow adjustment. Pressed button back in, water turns off.
- Function indicator on faceplate for Hand Shower and Katalyst shower head.
- Function indicator on faceplate for Deep massage shower head or Body spray.
- Function indicator on faceplate for Waterfall or Laminar.

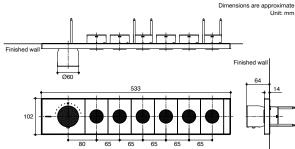

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-28213-BL

Anthem


Remote on/off button for digital thermostatic valve

- Acts as an auxiliary control for the Anthem digital shower system.
- Pairs with your digital thermostatic valve using Bluetooth® wireless technology.
- Provides simple on/off actuation of shower outlets.
- Sleek, minimalist design.

• Required Products/Accessories

 Anthem digital valve (K-28209X, K-28210X, K-28211X, or K-28212X) and Anthem digital control (K-28214), each sold separately.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-28214-BL


Anthem

Digital control 2-6 Outlet

- Digital control with easy-to-read icons and configurable touch screen.
- Control temperature, flow, and up to six shower outlets from a simple, intuitive interface.
- Turn the large KOHLER® dial for easy temperature and flow rate adjustment.
- Nine user-definable presets let you save your favorite shower settings.
- System warm-up and pause feature.
- Available in multiple languages.
- Connect up to two controls within your digital shower system.
- Pair with optional Anthem remote on/off button (K-28213); sold separately.

• Required Products/Accessories

 Anthem digital valve (K-28209X, K-28210X, K-28211X, or K-28212X), each sold separately.

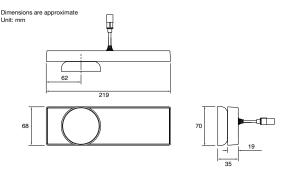

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-28209X-NA

Anthem

Two-port Digital Thermostatic Valve

- Digitally controlled thermostatic mixing valve.
- · Antiscald protection.
- Built-in temperature and flow control.
- Two independently controllable 1/2" outlets with brass tube connections.
- · Reinforced engineering-grade thermoplastic body.
- Required Products/Accessories

Anthem digital control (K-28214) (sold separately).

Optional Products/Accessories

K-28213 Remote on/off button for digital thermostatic valve.



K-28210X-NA

Anthem

Three-port Digital Thermostatic Valve

- Digitally controlled thermostatic mixing valve.
- Antiscald protection.
- Built-in temperature and flow control.
- Three independently controllable 1/2" outlets with brass tube connections.
- Reinforced engineering-grade thermoplastic body.
- Required Products/Accessories

Anthem digital control (K-28214) (sold separately).

Optional Products/Accessories

K-28213 Remote on/off button for digital thermostatic valve.



K-28211X-NA

Anthem


Four-port Digital Thermostatic Valve

- · Digitally controlled thermostatic mixing valve.
- Antiscald protection.
- Built-in temperature and flow control.
- Allows for two different temperature and flow zones in your shower.
- Four independently controllable 1/2" outlets with brass tube connections.
- Reinforced engineering-grade thermoplastic body.
- Required Products/Accessories


Anthem digital control (K-28214) (sold separately).

Optional Products/Accessories


K-28213 Remote on/off button for digital thermostatic valve.

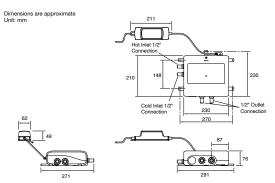


Note: The recommended dimension for installation can be adjusted according to user preferences and layout

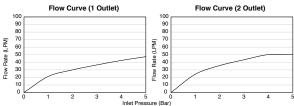


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

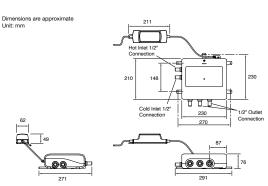


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

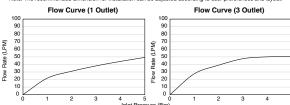

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi

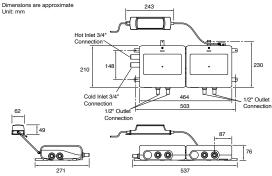

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

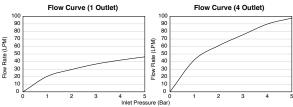

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-28212X-NA

Anthem

Six-port Digital Thermostatic Valve

- Digitally controlled thermostatic mixing valve.
- Antiscald protection.
- Built-in temperature and flow control.
- Allows for two different temperature and flow zones in your shower.
- Six independently controllable 1/2" outlets with brass tube connections.
- Reinforced engineering-grade thermoplastic body.
 Required Products/Accessories Anthem digital control (K-28214) (sold separately).
- Optional Products/Accessories K-28213 Remote on/off button for digital thermostatic valve.

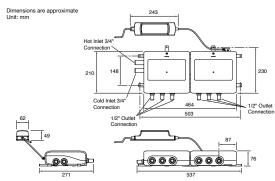

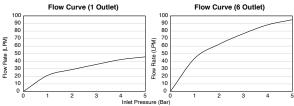

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Statement™ Showering Collection







K-26293T-RGD

K-26293T-CP





K-26293T-BL

K-26293T-2MB

Statement

12" Oblong Rainhead

- Brass construction faceplate.
- Katalyst air-induction technology for powerful and even coverage.
- MasterClean™ sprayface features an easy-to-clean surface.
- 1-function showerhead.

Required Accessories

Statement Wall-Mount Shower Arm (K-26322T).



Full Coverage with Katalyst™ Technology







K-26292T-CP

K-26292T-AF

K-26292T-RGD





K-26292T-BL

K-26292T-2MB

Statement

14" Round Rainhead

- Brass construction faceplate.
- Katalyst air-induction technology for powerful and even
- MasterClean™ sprayface features an easy-to-clean surface.
- 1-function showerhead.

Required Accessories

Statement Wall-Mount Shower Arm (K-26322T).



Full Coverage with Katalyst™ Technology







K-26294T-CP

K-26294T-AF

K-26294T-RGD





K-26294T-BL

K-26294T-2MB

Statement

14" Oblong Rainhead

- Brass construction faceplate.
- · Katalyst air-induction technology for powerful and even coverage.
- MasterClean™ sprayface features an easy-to-clean surface.
- 1-function showerhead.


Required Accessories


Statement Wall-Mount Shower Arm (K-26322T).



Full Coverage with Katalyst™ Technology


Dimensions are approximate Unit: mm






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout





Statement

18" Deep Massage Rainhead

- · Katalyst air-induction technology for powerful and even coverage.
- Include Deep massage function.
- 2-function showerhead.

Required Accessories

Statement Wall-Mount Shower Arm (K-26323T). Statement Ceiling-Mount Shower Arm (K-26325T).



Deep Massage



Full Coverage with Katalyst™ Technology



Statement

18" Ribbon Massage Rainhead

- Katalyst air-induction technology for powerful and even coverage.
- Include Ribbon massage function.
- 2-function showerhead.

• Required Accessories

Statement Wall-Mount Shower Arm (K-26323T). Statement Ceiling-Mount Shower Arm (K-26325T).



Ribbon Massage



Full Coverage with Katalyst™ Technology



K-26301T-BL Statement


Iconic Open Rain Rainhead


- Brass construction.
- Distinctive design allowing the gravity-fed stream from rainhead to descend organically, and prevents drips or clogs.

K-26301T-2MB


• 1-function showerhead.









Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



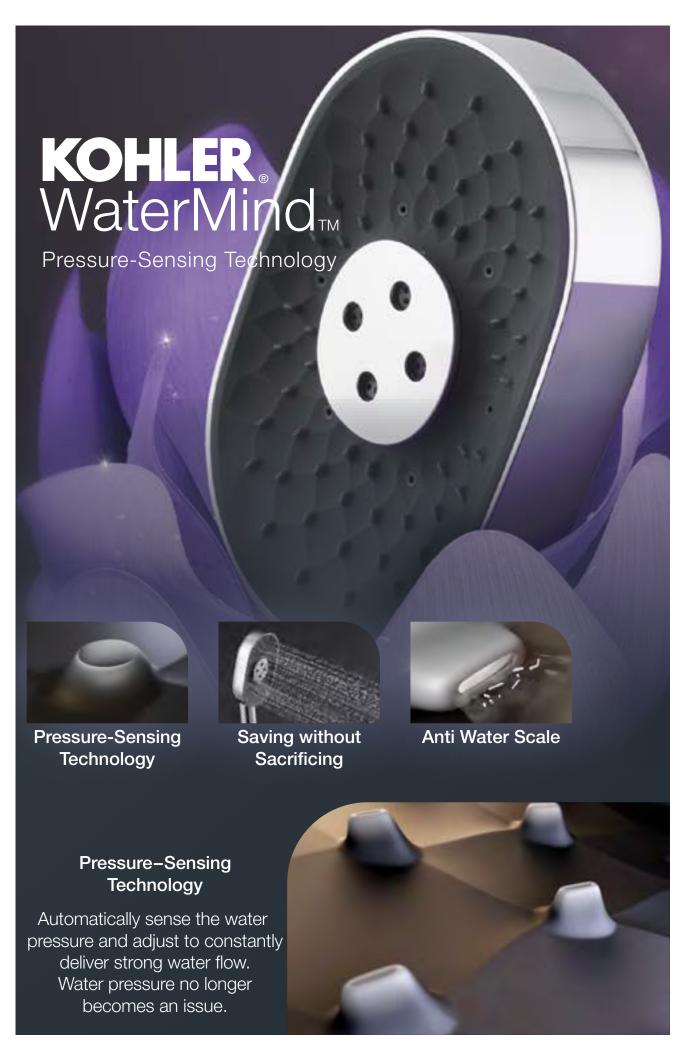


Statement x WaterMind™

Actuation buttons that can be accessed with the spray directed away from you, making it easy to select the spray you want






Advanced multi-function spray patterns deliver transformational moments of wellbeing in every shower.



Rain with WaterMind technology Wide coverage for overall body clean.





Deep Massage

Strong streams of water twist and swirl to deliver relaxation and relief.





Cloud Spray

Super-fine, silken droplets converge to gently caress the body.





Statement

Round Handshower with WaterMind

- WaterMind Pressure-sensing Technology.
- Automatically sense the water pressure and adjust to constantly deliver strong water flow.
- Include Rain with WaterMind Technology function.
- Include Deep massage function.
- Include Cloud function.
- 3-function handshower.



Statement

Oblong Handshower with WaterMind

- WaterMind Pressure-sensing Technology.
- Automatically sense the water pressure and adjust to constantly deliver strong water flow.
- Include Rain with WaterMind Technology function.
- Include Deep massage function.
- Include Cloud function.
- 3-function handshower.




Statement

Iconic Handshower

- Single-function handshower delivers a full, consistent spray
- Infinity provides three spray experiences in one.
- Optimized sprayface for maximum performance.
- MasterClean™ sprayface features an easy-to-clean surface.


imensions are approximate



Note: The recommended dimension for installation can be adjusted according to user preferences and lavor



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-11628X-BL

K-11628X-2MB

Shower Hose 1500 mm.

• Includes metal screen washer to prevent clogging.



Statement

Iconic Dual Shower Arm

- Brass construction.
- Separate 2-outlet water way.
- Compatible only with single-function rainhead.



Statement

- Wall-Mount Shower Arm
- 355 mm. shower arm.
- Brass construction.
- Compatible only with two-function rainhead.



K-26325T-BL


K-26325T-2MB


Statement

Ceiling-Mount Shower Arm


- 127 mm. rainhead arm.
- · Brass construction.
- Compatible only with two-function rainhead.

Dimensions are approximate Unit: mm




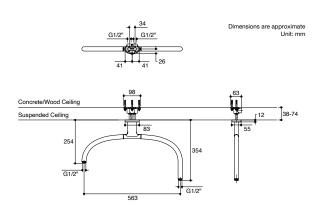

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

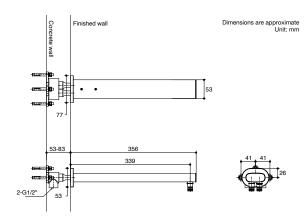

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

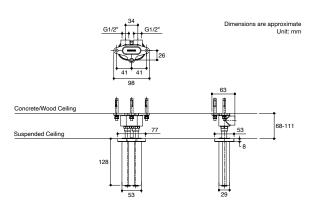


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Statement

Wall-Mount Shower Arm

- 394 mm. shower arm.
- Brass construction.
- Compatible only with single-function rainhead.

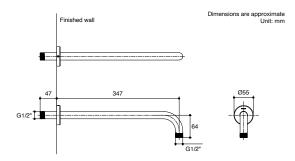


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Statement

Wall Supply with Bracket

- Solid metal construction.
- For use with a handshower and hose.
- Coordinates with other products in the Statement collection.

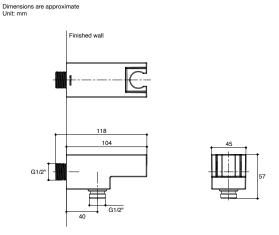

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Statement 80 cm. slide bar

- · Brass construction.
- 80 cm. adjustable slidebar supports a handshower.

Dimensions are approximate Unit: mm

55 Ø39 619


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Statement • 80 cm. slide bar with integrated water supply.

- · Brass construction.
- Integrated water supply allows water to be plumbed directly through slidebar.
- 80 cm. adjustable slidebar supports a handshower.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.


Statement™ Body Spray




Oblong Vichy Body Spray

- Single-function linear body spray delivers 14 twirling.
- MasterClean™ sprayface features an easy-to-clean
- Deep Massage streams targeting sore muscles to ease away aches and pains.
- Low-profile design complements any decor.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

KOHLER®

Katalyst Air™ Showerhead





Katalyst air-induction technology


Inducting up to 50% air from the top of your showering products, effectively saves water by 50%*.

*Kohler internal test for reference.

Optimized nozzle design

Scientifically designed nozzle allocation with optimized water coverage and comfort to ensure the best showering experience.

1.3mm nozzle brings bigger water drops with less water by mixing in air.

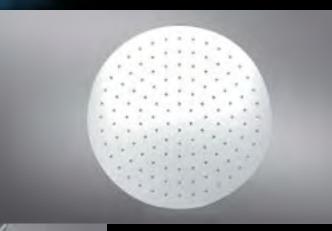


Advanced internal structure

Upgraded waterway distribution ensures better mixing of water and air, reducing residual water.

More robust structure by adding hidden screws and reducing exposed ones on the back plate.

Non-dripping design

Apart from internal structure, self-levelling technology is also applied on shower-











Precise Temperature Control

Parafin Valve brings immediate reaction to cold and hot inlet water change, protests against water temperature fluctuations at 0.4°c within 0.2 seconds*. *Kohler internal test for reference.



Maximum Temperature Limit


Automatically restricts water outlet to prevent scald under extreme situations.



Premium Material

Imported thermostatic valves passed 1,000,000 life cycle test*. Life long warranty under normal condition.

* Kohler internal test for reference.




K-73111T-7-AF


K-73111T-7-RGD



K-73111X-7-BV

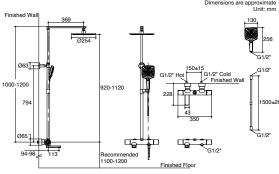

Note: The recommended dimension for installation can be adjusted according to user preferences and layout

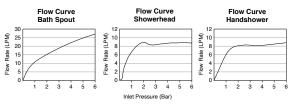

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Composed

K-73111X-7-CP

Thermostatic Shower Column

- Spout reach: 113 mm.
- Brass construction.
- Directionally adjustable, laminar flow aerator.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.
- Includes 10" round showerhead.




K-97389T-9-CP


Avid

Thermostatic Dual Showerheads Angular Shower Column

- Reach: 134 mm.
- Brass Construction.
- Directionally adjustable, laminar flow aerator.
- Precise thermostatic control for added safety.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.
- Includes 10" round showerhead.

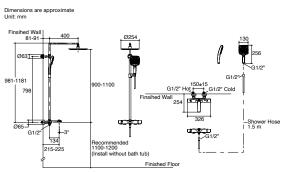

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-23861T-9-CP


Urbanity+

Themostatic Shower Column

- Adjustable inlet fittings with 10 mm. tolerance.
- · Intuitive control by one touch of a button changes water outlet and water volume.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Extra-large control panel serves as an stylish and useful storage shelf.
- · Includes bath outlet.
- Includes 2-function 13" x 9" rectangular showerhead.
- Includes 3-function handshower.

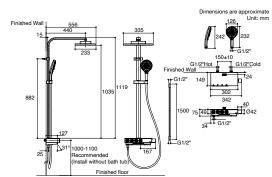

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



imate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-23860T-9-CP


Urbanity+

Themostatic Shower Column

- Adjustable inlet fittings with 10 mm. tolerance.
- · Intuitive control by one touch of a button changes water outlet and water volume.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Extra-large control panel serves as an stylish and useful storage shelf.
- · Includes bath outlet.
- Includes 13" x 9" rectangular showerhead.
- Includes 3-function handshower.

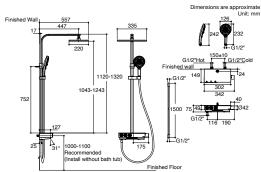

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-23125T-B9-2BL

July

Thermostatic 3-Way Shower Column

- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Optimized sprayface and large nozzles with Katalyst® Air-induction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 1-function 10" round showerhead.
- Includes 3-function handshower.



K-32404T-7-CP

Atom

3-Way Thermostatic Shower Column

- Reach: 193 mm.
- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- · Concealed, easy-clean aerator and key.
- Includes bath outlet.
- Includes 8" round showerhead.
- Includes 3-function handshower.




K-33099T-9-CP

K-33099T-9-AF


Accliv

Thermostatic Shower Column


- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance
- Katalyst air-induction technology for powerful and even coverage.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 1-function 10" round showerhead.
- Includes 3-function handshower.

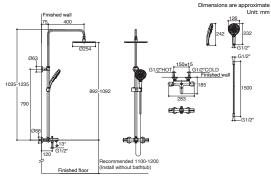


ended dimension for installation can be adjusted according to user preferences and layout

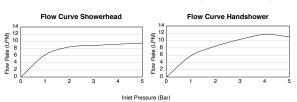


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

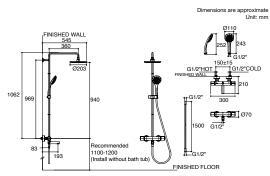


Note: The recommended dimension for installation can be adjusted according to user preferences and layout

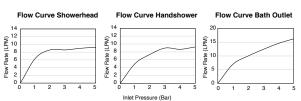

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

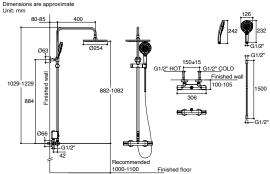

nended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97822T-9-CP

Aleo

Thermostatic Dual Showerheads Angular Shower Column


- Brass Construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Optimized sprayface and large nozzles with Katalyst Air-induction for improved water coverage.
- Includes 10" ultra thin round Katalyst Air Rainhead.
- Includes 110 mm. Renew Organic 3-function handshower.
- Adjustable inlet fittings with 15mm tolerance.




K-32403T-7-CP


2-Way Thermostatic Shower Column

- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 8" round showerhead.
- Includes 3-function handshower.

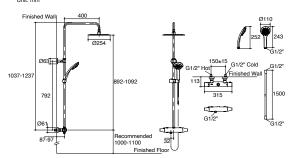




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

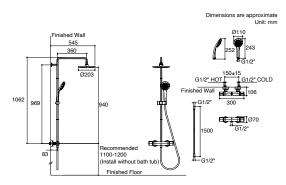

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Thermostatic Wall-Mount Bath and Shower Faucet



K-23748T-9-CP

Urbanity+

Themostatic Wall-Mount Bath and Shower Mixer

- Adjustable inlet fittings with 10 mm. tolerance.
- Intuitive control by one touch of a button changes water outlet and water volume.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Extra-large control panel serves as an stylish and useful storage shelf.
- Includes bath outlet.
- Includes 3-function handshower.




K-EX27029T-9-CP

K-EX27029T-9-BL


Occasion

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 116 mm.
- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Laminar flow aerator for clean aesthetic and reduced splash.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 3-function handshower.

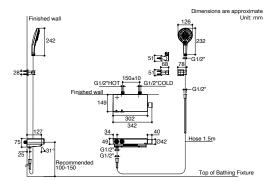


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate

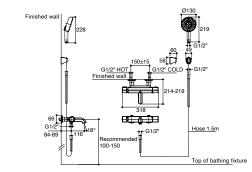

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-72286T-9-CP

Aleo

Thermostatic Wall-Mount Bath and Shower Mixer


- Reach: 200-210 mm.
- Brass Construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 110 mm. Awaken Geometric 3-function handshower.
- Adjustable inlet fittings with 15 mm.tolerance.




Accliv

Thermostatic Exposed Wall-Mount Bath and Shower Mixer


- Spout reach: 192-197 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Adjustable inlet fittings with 15 mm. tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Auto-return Diverter.
- Includes 3-function handshower.

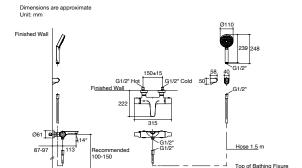


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

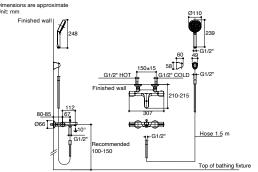

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Thermostatic Wall-Mount Shower Faucet





K-EX27028T-9-CP

K-EX27028T-9-BL

Occasion

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 3-function handshower.



K-72352T-9-CP

Aleo

Thermostatic Wall-Mount Shower Mixer

- Brass Construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes 110 mm. Awaken Geometric 3-function handshower.
- Adjustable inlet fittings with 15 mm.tolerance.




Accliv


Thermostatic Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Auto-return diverter.
- Includes 3-function handshower.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




lote: Flow rates are approximate, (1 gallon = 3,785 liters, 1 bar = 14,5 psi)


Dimensions are approximate

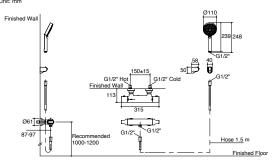


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

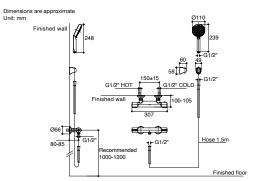

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Shower Column



K-98418T-D4-CP K-98418T-D4-BN K-98418T-D4-AF K-98418T-D4-BV

Fairfax

Deck-Mount Bath Faucet

- Spout reach: 162 mm.
- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 5-function handshower and diverter.
- Includes white mineral stone cap.
- Includes 8" round showerhead.



K-31153T-B4-2MB

Memoirs

3-Way Shower Column

- Spout reach: 203-213 mm.
- · Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes 1-function 10" square showerhead.
- Includes 5-function handshower.




K-EX27030T-4-CP

K-EX27030T-4-BL

Occasion

Shower Column


- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Includes 1-function 10" round showerhead.
- Includes 3-function handshower.

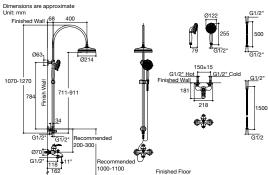

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

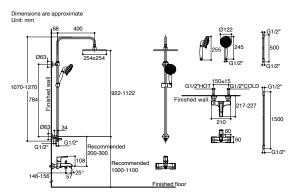


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

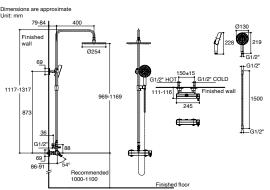

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-99032T-C4-CP

K-99032T-C4-RGD

K-99032T-C4-2BZ

Kelston

Dual Showerheads Curved Shower Column

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 10" round showerhead with shower column.
- Includes 5-functions handshower with bracket.



K-45372X-C4-CP

Strayt

Dual Showerheads Angular Shower Column

- Reach: 134 mm.
- Brass construction.
- Includes 10" square showerhead and shower column.
- Includes handshower with 1.5 m hose and bracket.




K-29677X-CP

Strayt


Dual Showerhead Angular Shower Column

- Brass construction
- Optimized sprayface and large nozzles for improved water coverage.
- Includes 10" ultra thin square Katalyst Air Rainhead.
- Includes Rain Duet push button, 3-function handshower
- Includes 1.5 m. PVC shower hose.
- Lever handle.

Dimensions are approximate

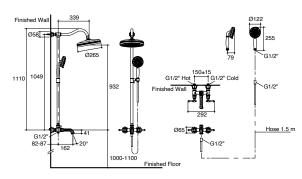


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Finsihed Wall 598-608 254 254 256 391 391 393 393 48 393 4


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

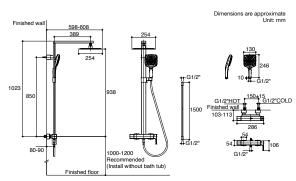

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-24754X-4-CP

Honesty

Dual Showerheads Angular Shower Column

- Brass construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 8" ultra slim showerhead.
- Includes Renew 3-function handshower.
- Includes 1.5 m. shower hose, chrome color.



K-72677X-C7-CP

Elevation

Dual Showerheads Angular Shower Column

- Brass Construction.
- Includes 10" round slim showerhead with shower column.
- Includes 3-function handshower with bracket.




K-26242T-4-CP


Aleo

Shower Faucet


- Brass Construction.
- Adjustable inlet fittings with 15 mm.tolerance.
- Optimized sprayface and large nozzles with Katalyst Air-induction for improved water coverage.
- Includes 10" ultra thin round Katalyst Air Rainhead.
- Includes 3-function handshower.

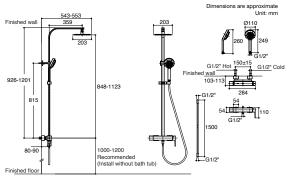


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

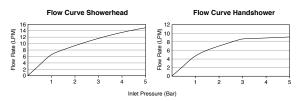


lote: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi

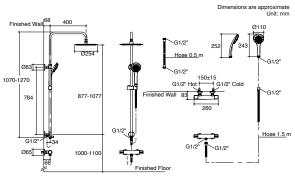


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

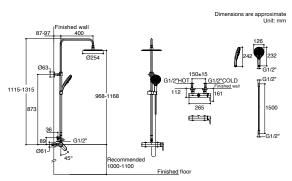

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97826T-4-CP

Aleo

Shower Column

- Brass Construction.
- Optimized sprayface and large nozzles with Katalyst Air-induction for improved water coverage.
- Includes 8" ultra thin round Katalyst Air Rainhead.
- Includes 110 mm. Renew Organic 3-function handshower.
- Adjustable inlet fittings with 15 mm.tolerance



K-23126T-B9-2BL

July

3-Way Shower Column

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Optimized sprayface and large nozzles with Katalyst® Air-induction.
- Includes 1-function 10" round showerhead.
- Includes 3-function handshower.




K-72821X-4-CP


July

Dual Showerheads Angular Shower Column


- Brass construction.
- Includes 7" round showerhead and shower column.
- Includes handshower with 1.5 m. hose and bracket.

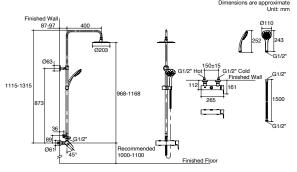


Note: The recommended dimension for installation can be adjusted according to user preferences and lavout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

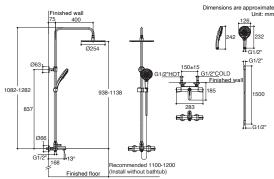


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

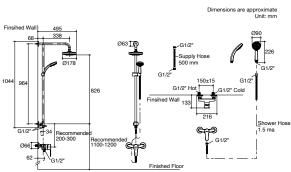

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

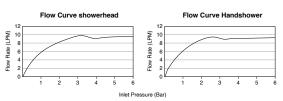

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-99474T-C4-CP

Kumin

Dual Showerheads Angular Shower Column

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 8" round showerhead with shower column.
- · Includes 3-functions handshower with bracket.
- · Lever handles.



Taut

Shower Column

- Solid metal construction.
- Includes wall bracket and mounting fasteners suitable for various wall types.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 3-function handshower and diverter.
- Lever handle.
- Includes 8" round showerhead.




K-73194X-4A-CP

Taut

Shower Column


- Solid metal construction.
- Includes wall bracket and mounting fasteners suitable for various wall types.
- Katalyst air-induction technology for powerful and even coverage.
- Includes handshower and diverter.
- · Lever handle.
- Includes 8" round showerhead.

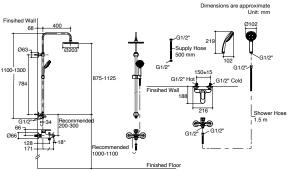


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

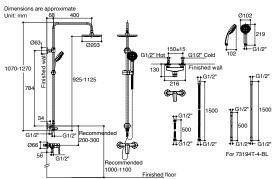


Note: The recommended dimension for installation can be adjusted according to user preferences and layout

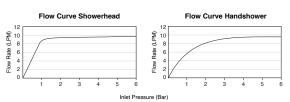

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

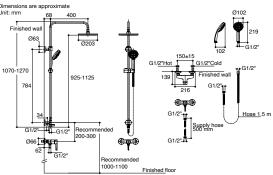

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

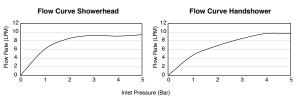

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-12969T-C-2MB

Straight Shower Column 10" Showerhead

- Brass construction.
- Includes 1-function 8" round showerhead.
- **Required Accessories**

Kohler Wall-Mount Bath and Shower Faucet (Sold Separately) or Kohler Wall-Mount Shower Faucet (Sold Separately).



K-76635T-CP

Square Showerhead Angular Shower Column

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes adjustable slide bracket.
- Includes 8" square showerhead.

Required Accessories

Kohler Wall-Mount Bath and Shower Faucet (Sold Separately) or Kohler Wall-Mount Shower Faucet (Sold Separately).



K-76635T-ZY-CP


Round Showerhead Angular Shower Column

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes adjustable slide bracket.
- Includes 8" square showerhead.


Required Accessories

Kohler Wall-Mount Bath and Shower Faucet (Sold Separately) or Kohler


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi) Wall-Mount Shower Faucet (Sold Separately).

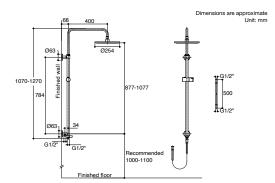


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user prefer



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

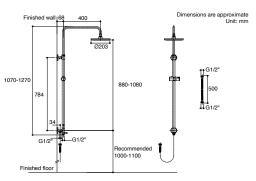

lation can be adjusted according to user preferences and layout





K-76632T-CP

Round Showerhead Curved Shower Column

- · Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes adjustable slide bracket.
- Includes 8" round showerhead.

• Required Accessories

Kohler Wall-Mount Bath and Shower Faucet (Sold Separately) or Kohler Wall-Mount Shower Faucet (Sold Separately).



K-76629T-CP

Round Showerhead Curved Shower Column with Handshower

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes adjustable slide bracket.
- Includes 3-function handshower.
- Includes 8" round showerhead

• Required Accessories

Kohler wall-mount shower valve-Cold Water Only or Mixer (sold separately).




K-76633T-B-CP

Square Showerheads Angular Shower Column with Handshower


- · Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes adjustable slide bracket.
- Includes Shift+ 2-function handshower, push button.
- includes 8" square showerhead.

Required Accessories


Kohler wall-mount shower valve-Cold Water Only or Mixer (sold separately).

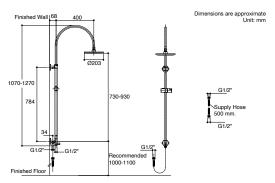


Note: The recommended dimension for installation can be adjusted according to user preferences and layou




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

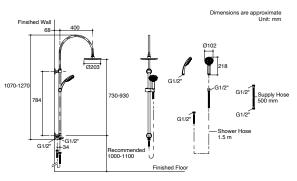


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

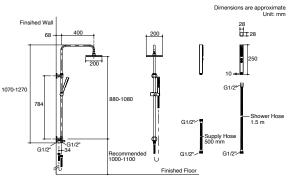

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Wall-Mount Bath and Shower Faucet



K-73095X-4-BV

Composed

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 127 mm.
- Brass construction.
- Directionally adjustable, laminar-flow aerator.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes Rain Duet push button, 3-function handshower.



K-72661T-4V-2MB

Memoirs


Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 224 mm.
- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes 5-function handshower.




K-97369T-4-CP


- Spout reach: 215-225 mm.
- Brass Construction.
- Directionally adjustable, laminar-flow aerator.
- High-temperature limit stop for added safety.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.

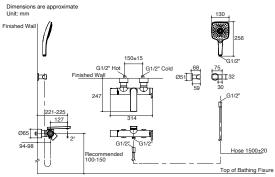


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

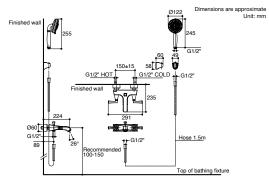



Note: Flow rates are approximate, (1 gallon = 3,785 liters, 1 bar = 14,5 psi)

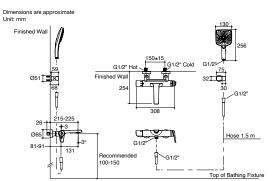



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-23494T-4-CP K-23494T-4-AF K-23494T-4-RGD K-23494T-4-BL

Parallel

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 167-177 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes 3-function handshower.
- · Lever handle.



Kelston

Exposed Wall-Mount Bath and Shower Mixer


- Spout reach: 241 mm.
- Brass construction.
- Quarter-turn ceramic disc valves.
- Includes 5-way handshower with 1.5 m. hose.




K-45370T-B4-CP

Strayt


- Brass construction.
- Concealed, easy-clean aerator.
- Includes Shift+ 2-function handshower, push button.
- Adjustable inlet fittings with 15 mm. tolerance.
- Lever handle.
- Includes 1.5 m shower hose.

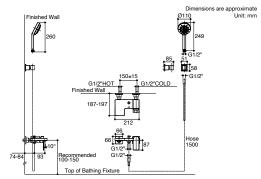


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

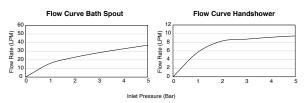


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

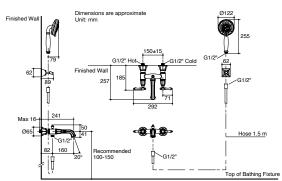


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

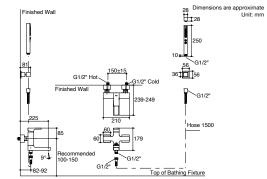

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-22086X-4-CP

Honesty

Exposed Bath and Shower Faucet

- Spout reach: 135 mm..
- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes adjustable bracket.
- Includes renew 3-function handshower.
- Includes 1.5 m. shower hose, chrome color.

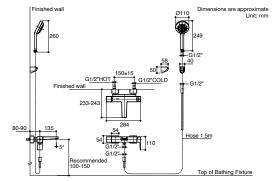



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-72695T-B4-CP K-72695T-B4-BN K-72695T-B4-AF K-72695T-B4-BV

Fairfax

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 162 mm.
- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes 5-function handshower and diverter.
- Includes white mineral stone cap.

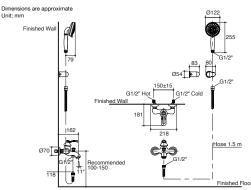




n = 3.785 liters, 1 bar = 14.5 psi




K-7686X-4-CP

July

- Spout reach: 165 mm.
- Brass construction.
- Includes 4-way handshower with 1.5 m. hose.
- Lever handle.

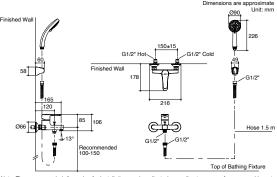

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

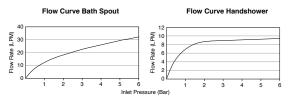

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Tout

Exposed Wall-Mount Bath and Shower Mixer

- Spout reach: 128 mm.
- Solid metal construction.
- Includes handshower (K-74036T-4-CP).
- Includes 5-function handshower (K-74036T-4-BL).
- · Lever handle.



K-74036X-4A-CP

Taut

Exposed Wall-Mount Bath and Shower Mixer


- Spout reach: 177 mm.
- Solid metal construction.
- Includes handshower.
- Lever handle.
- Adjustable inlet fittings with 15 mm. tolerance.




K-99460T-4-CP

Kumin


- Spout reach: 171 mm.
- Solid metal construction.
- Includes single function handshower with 1.5 m. hose.
- Lever handle.

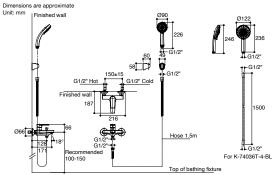


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

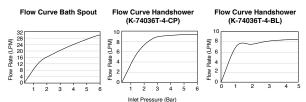


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

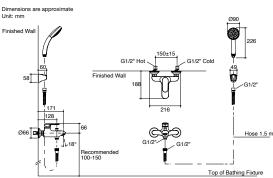

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Wall-Mount Shower Faucet



Composed

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes Rain Duet push button, 3-function handshower.



K-72669X-4-CP

Singulier

Wall-Mount Shower Faucet


- Brass construction.
- Includes handshower with bracket.
- Lever handle.
- Includes 1.5 m shower hose.




Kelston

Exposed Wall-Mount Shower Mixer


- Brass construction.
- Quarter-turn ceramic disc valves.
- Includes 5-way handshower with 1.5 m. hose.

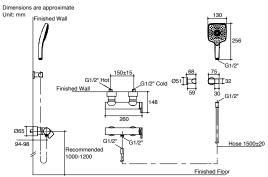


Jote: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

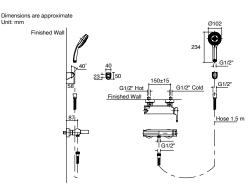


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

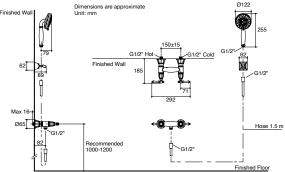

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-97368T-4-CP

Avid

Exposed Wall-Mount Shower Mixer

- Brass Construction.
- Katalyst air-induction technology for powerful and even coverage.
- Includes 130 mm. Rain Duet push button, 3-function handshower.



K-23493T-4-CP K-23493T-4-AF K-23493T-4-RGD K-23493T-4-BL

Parallel

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Includes 3-function handshower.
- Lever handle.




K-45371T-B4-CP


Strayt

Exposed Wall-Mount Shower Mixer


- Brass construction.
- Includes Shift+ 2-function handshower, push button.
- Adjustable inlet fittings with 15 mm. tolerance.
- Lever handle.
- Includes 1.5 m shower hose.

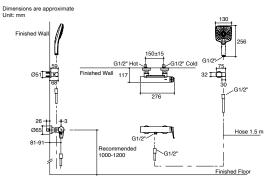


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

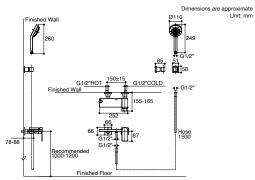


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

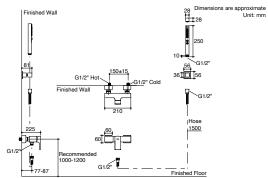

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-72697T-B4-CP K-72697T-B4-BN K-72697T-B4-AF K-72697T-B4-BV

Fairfax

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes 5-function handshower.
- Includes white mineral stone cap.



K-24749X-4-CP

Honesty

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Adjustable inlet fittings with 15 mm. tolerance.
- Includes Renew, 3-function handshower.
- Includes 1.5 m. shower hose, chrome color.
- Includes adjustable bracket.




K-25107T-4-CP


Aleo S

Wall-Mount Bath and Shower Faucet


- Spout reach: 182-192 mm.
- Brass Construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes 3-function handshower.
- Includes adjustable bracket.

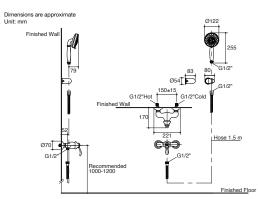


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

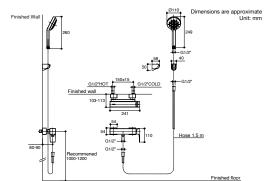


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



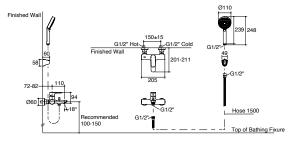

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-25108T-4-CP

Aleo

Wall-Mount Shower Faucet

- Brass Construction.
- Coin aerator allows for easy cleaning and maintenance.
- Includes 3-function handshower.
- Includes adjustable bracket.



K-99463T-4-CP

Kumin

Exposed Wall-Mount Shower Mixer

- Solid metal construction.
- Includes single function handshower with 1.5m. hose.
- Lever handle.




K-74035X-4A-CP

Taut


Exposed Wall-Mount Shower Mixer

- Solid metal construction.
- Includes handshower.
- Lever handle.
- Adjustable inlet fittings with 15 mm. tolerance.




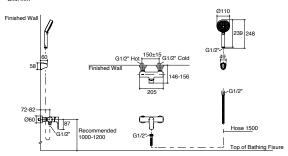


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

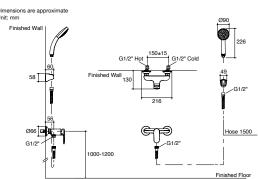


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Taut

Exposed Wall-Mount Shower Mixer

- Solid metal construction.
- Includes handshower.
- Includes 5-function handshower.
- · Lever handle.



K-73195T-4-CP

Taut

Exposed Wall-Mount Shower Mixer without Hand Shower

- Solid metal construction.
- Lever handle.




K-7685X-4-CP


July

Exposed Wall-Mount Shower Mixer

- Brass construction.
- Includes 4-way handshower with 1.5 m. hose.
- Lever handle.

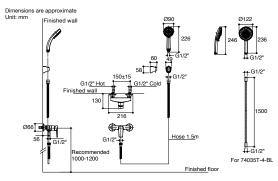


Note: The recommended dimension for installation can be adjusted according to user preferences and layou




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

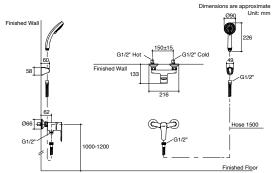

Note: The recommended dimension for installation can be adjusted according to user preferences and layour



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-7685X-ZZ-CP

July

Exposed Wall-Mount Shower Mixer without Hand Shower

- Brass construction.Lever handle.

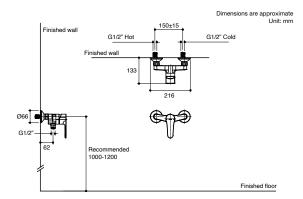

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Overhead Shower Panel



K-77276T-L-CP

Beitou

Ceiling-Mount Showerhead

- Solid metal construction.
- Katalyst Air-Induction technology for powerful and even coverage.
- Integrated warm white lights powered by the flow of water.
- 3-function showerhead (Katalyast Air Rain, Kloudburst and Laminar) with innovative hydro power moving massage spray.



K-76017X-L-CP

Beitou

Ceiling-Mount Showerhead


- Solid metal construction.
- Katalyst Air-Induction technology for powerful and even coverage.
- Hydro power LED lighting.
- 3-function showerhead (Outer Rain, Center Rain and Laminar)




Beitou

Wall-Mount Showerhead

- Solid metal construction.
- Katalyst Air-Induction technology for powerful and even coverage.
- 3-function showerhead (Cascade, Rain and Laminar).
- Integrated warm white lights powered by the flow of water.

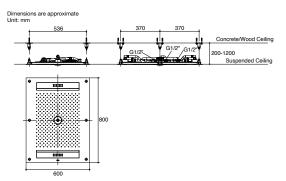


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm

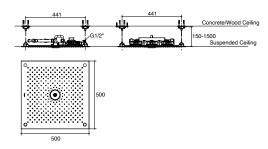


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

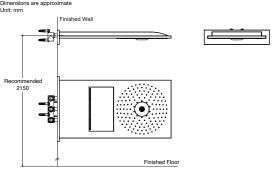

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

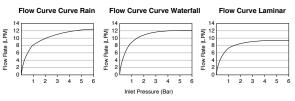



K-98275T-CL-CP

Loure

14" Ceiling-Mount Showerhead

- Brass construction.
- Katalyst air-induction technology for powerful and even
- Flexible, silicone nozzles assure long life and easy clean.
- · Optimized sprayface and large nozzles for improved water coverage.
- Non-drip technology.
- Ultra-slim design.



K-9301T-CL-CP

Loure

14" Katalyst Showerhead, Ultra Slim Square

- Brass construction.
- Katalyst air-induction technology for powerful and even
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.
- Ultra-slim design.



K-15994T-CL-CP

Contemporary


14" Katalyst Showerhead, Round

- Brass construction.
- Katalyst air-induction technology for powerful and even
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water
- Patented self-levelling, non-drip technology.


Concrete/Wood Ceiling Suspended Ceiling



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Flow Curve Flow Rate (LPM)


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-9302T-CL-CP

Loure

12" Katalyst Showerhead, Ultra Slim Square

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.
- Ultra-slim design.



K-15993T-CL-CP

Traditional

12" Katalyst Showerhead, Round

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.




K-15992T-CL-CP


Contemporary

12" Katalyst Showerhead, Round


- Brass construction.
- Katalyst air-induction technology for powerful and even
- Flexible, silicone nozzles assure long life and easy clean.
- · Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensio Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout





K-15991T-CL-CP

Traditional

10" Katalyst Showerhead, Round

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.







K-18359X-CL-CP

K-18359X-CL-BL

K-18359X-CL-BV

Contemporary

10" Katalyst Showerhead, Round

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage
- Patented self-levelling, non-drip technology.




K-73040T-CL-CP


Contemporary

10" Katalyst Showerhead, Ultra Slim Square


- Solid metal construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- · Patented self-levelling, non-drip technology.
- Ultra-slim design.

Dimensions are approximate






Note: The recommended dimension for installation can be adjusted according to user preferences and layour




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layou




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout






K-13689X-CP

10" Katalyst Showerhead, Round

- · Brass construction.
- Optimized spray face for maximum performance.




K-73039T-CL-CP

Contemporary

10" Katalyst Showerhead, Ultra Slim Round

- Solid metal construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.
- Ultra-slim design.

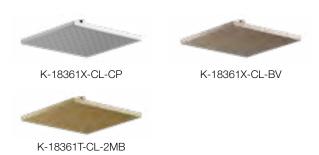


Contemporary


10" Katalyst Showerhead, Square

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Design allows for easy optimization of performance and flow.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layo



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout





K-13696X-CP

10" Katalyst Showerhead, Square

- Brass construction.
- Optimized spray face for maximum performance.



K-15990T-CL-CP

Traditional

8" Katalyst Showerhead, Round

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.




K-18358T-CL-CP

Contemporary


8" Katalyst Showerhead, Round

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm






Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Flow Curve



K-18360T-CL-CP

8" Katalyst Showerhead, Square

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- Design allows for easy optimization of performance and flow.



K-73038T-CL-CP

Contemporary

8" Katalyst Showerhead, Ultra Slim Square

- Solid metal construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Patented self-levelling, non-drip technology.
- Ultra-slim design.




K-73037T-CL-CP


Contemporary

8" Katalyst Showerhead, Ultra Slim Round


- Solid metal construction.
- Katalyst air-induction technology for powerful and even coverage.
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water
- Patented self-levelling, non-drip technology.
- Ultra-slim design.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



tion can be adjusted according to user preferences and layout





K-99946T-CL-CP

- 8" Katalyst Showerhead, Square
 Katalyst air-induction technology for powerful and even
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Non-drip technology.





K-99945T-CL-CP

Contemporary


8" Katalyst Showerhead, Round

- Katalyst air-induction technology for powerful and even
- Flexible, silicone nozzles assure long life and easy clean.
- Optimized sprayface and large nozzles for improved water coverage.
- Non-drip technology.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Race Track

Kohler "Race Track" technology for 1-function showerhead to evenly distribute the flow of water throughout the showerhead.

Dimensions are approximate Unit: mm




K-22645X-BL

Parallel

Square Showerhead with Shower Arm


- Brass construction (shower arm).
- 127 mm. square spray-plate.
- Includes click drain.
- R1/2" thread connection(s).
- Includes shower arm.






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-72416T-E3-CP

Awaken

Showerhead with Arm

- 90 mm. round spray-plate.
- Design allows for easy optimization of performance and flow.
- Includes shower arm.
- This product meets LEED water conservation requirements.



K-98459X-AK-CP

Finial

Single Function Katalyst Showerhead with Arm and Flange

- Brass construction.
- 140 mm. round spray-plate.
- Katalyst technology.



K-16351X-AK-CP

Finial

Single Function Katalyst Showerhead with Arm and Flange

- Brass construction.
- 138 mm. round spray-plate.
- Katalyst technology.




K-98457X-AK-CP

Purist


Showerhead with Arm and Flange

- Brass construction.
- 138 mm. round spray-plate.
- Katalyst technology.

Dimensions are approximate Unit: mm

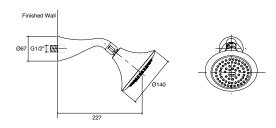


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate

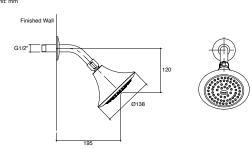


Note: The recommended dimension for installation can be adjusted according to user preferences and layou




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-72446X-CP


Citrus

Single Function Katalyst Showerhead with Arm and Flange


• Brass construction.

- 96 mm. round spray-plate.Katalyst technology.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.








Statement

Iconic Dual Shower Arm

- · Brass construction.
- Separate 2-outlet water way.
- Compatible only with single-function rainhead.

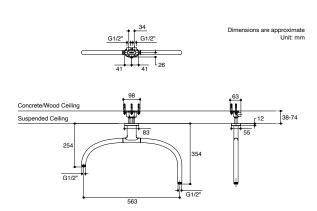


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Statement

Wall-Mount Shower Arm

- 355 mm. shower arm.
- Brass construction.
- Compatible only with two-function rainhead.

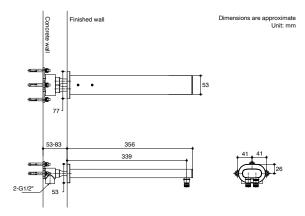


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Statement

Ceiling-Mount Shower Arm

- 127 mm. rainhead arm.
- · Brass construction.
- Compatible only with two-function rainhead.

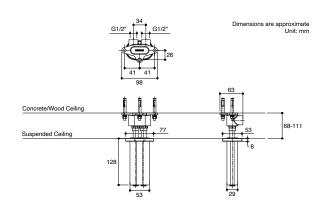


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Statement

Wall-Mount Shower Arm

- 394 mm. shower arm.
- Brass construction.
- Compatible only with single-function rainhead.

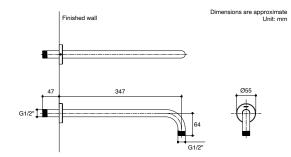


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Wall-Mount Shower Arm 15"

- Brass construction.
- 352 mm. length.
- Recommended to be matched with 8" or 10" Katalyst Air showerhead.

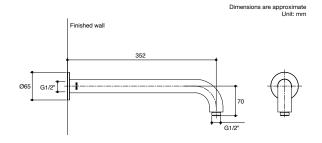


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Wall-Mount Shower Arm 19"

- Brass construction.
- 454 mm. length.
- Recommended to be matched with 8" or 10" Katalyst Air showerhead.

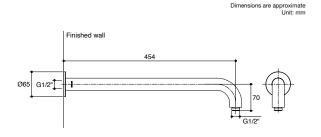

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Loure

Shower Arm 15"

- Brass construction.
- 380 mm. length.



K-16346X-CP

Wall-Mount Shower Arm

- Brass construction.
- 463 mm. length.



K-45918T-CP

Purist Shower Arm


Brass construction.




K-16347X-CP

Ceiling Mount Shower Arm


- Brass construction.
- 254 mm. length.

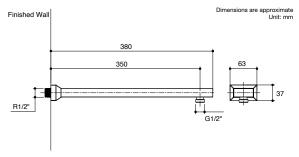

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

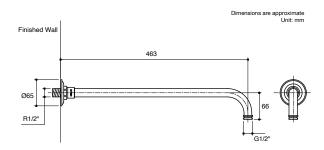


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

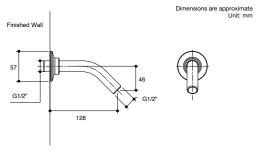

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Ceiling Mount Shower Arm 10"

- Brass construction.
- 249 mm. length.



Ceiling Mount Shower Arm 5"

- Brass construction.122 mm. length.




K-11623X-CP

Ceiling Mount Shower Arm 5"
• Brass construction.


- 127 mm. length.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Statement

Round Handshower with WaterMind

- WaterMind Pressure-sensing Technology.
- Automatically sense the water pressure and adjust to constantly deliver strong water flow.
- Include Rain with WaterMind Technology function.
- Include Deep massage function.
- Include Cloud function.
- 3-function handshower.



Statement

Oblong Handshower with WaterMind

- WaterMind Pressure-sensing Technology.
- · Automatically sense the water pressure and adjust to constantly deliver strong water flow.
- Include Rain with WaterMind Technology function.
- Include Deep massage function.
- Include Cloud function.
- 3-function handshower.




K-26286T-G-BL

K-26286T-G-2MB

Statement

Iconic Handshower


- Single-function handshower delivers a full, consistent
- Infinity provides three spray experiences in one.
- Optimized sprayface for maximum performance.
- MasterClean™ sprayface features an easy-to-clean surface.



led dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: The recommended dimension for installation can be adjusted according to user preferences and layout



w rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-R28241T-NKE-CP

K-R28241T-NKE-BL

Moxie

2.5GPM Handshower/Bluetooth

- Spray face has been strategically designed to deliver a full coverage spray.
- Rechargeable Wireless Speaker.
- Speaker is held securely in place and is easily removed for charging.
- Provides up to 9 hours of play time (varies based on volume and connectivity version).
- Available to pick up calls in the middle of a shower.
- IPX7-rated Waterpoof Speaker.







K-27793T-CP

Citrus

Handshower Combo with Bracket


- 5-function handshower.
- Includes stainless steel shower hose 1.5 m.
- Includes adjustable bracket.




K-27794T-CP

Handshower Combo with Slide Bar


- 5-function handshower.
- Includes stainless steel shower hose 1.5 m
- Includes slide bar 0.68 m with adjustable bracket.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

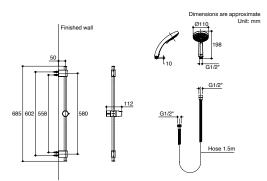

lation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







K-R97009X-CP

K-97009X-BV

Rainduet

Handshower

- Silicon material make it easy to clean and maintain the spray face.
- Katalyst air-induction technology for powerful and even coverage.
- Push button, 3-function handshower.
- 130 mm. spray-plate diameter.



K-98951T-L-BV
Rainduet
Multi-Function Air Handshower
• 5-function handshower.




K-98952T-L-2MB

Rainduet


Multi-Function Air Handshower-Traditional

• 5-function handshower.


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



7

K-R24717T-CP

K-24717T-BL

Rainduet

Multi-Function Handshower

- 126 mm. spray-plate diameter.
- Katalyst air-induction technology.
- Includes push button, 3-function handshower.





K-77989T-8A-3GC

Components

Handshower with Control

- Brass construction.
- Exclusive finishes for modern products.
- Unique finishes innovation.
- Includes 2-function handshower.
- Includes flexible G1/2" supply hoses and shower hose.




K-21336T-2MB


Shift+

Multi-Function Handshower, Square


- Brass construction.
- Push button, 2-function handshower.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

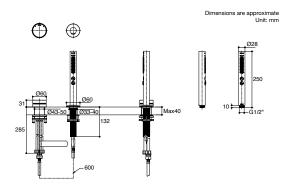


Note: The recommended dimension for installation can be adjusted according to user preferences and layou





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Shift+

Multi-Function Handshower, Round

- Brass construction.
- Push button, 2-function handshower.



Awaken

Multi-Function Handshower (GEO)-Standard Flow

- Optimized spray face for performance.
- 3-function handshower.




K-72415T-E2-CP


Awaken

Multi-Function Handshower (GEO)-Eco Flow


- Optimized spray face for performance.
- 3-function handshower.
- This product meets LEED water conservation requirements.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

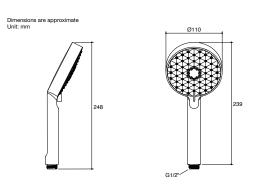


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

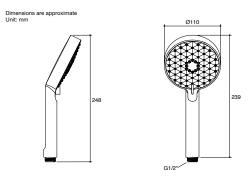

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-R72421T-CP

Awaken

Multi-Function Handshower (Organic)-Standard Flow

- Optimized spray face for performance.
- 3-function handshower.



K-72421T-E2-CP

Awaken

Multi-Function Handshower (Organic)-Eco Flow

Optimized spray face for performance.

- 3-function handshower.




K-72437T-CP


Rainjoy

3 way handshower


- 102 mm. spray-plate diameter.
- 5-function handshower.









Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm







Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-76399T-CP

Rainduet

Multi-Function Handshower with Hose and Bracket

- Push button, 3-function handshower.
- 130 mm. spray-plate diameter.
- Katalyst air-induction technology.
- Includes 1.5 m shower hose.
- Includes handshower bracket with angle adjustment.



K-76367T-CP

Renew

Multi-Function Handshower with Hose and Bracket-Organic Design

- 3-function handshower.
- 110 mm. spray-plate diameter.
- Includes 1.5 m shower hose.
- Includes handshower bracket with angle adjustment.




K-76368T-CP


Renew

Multi-Function Handshower with Hose and Bracket-Geometric Design


- 3-function handshower.
- 110 mm. spray-plate diameter.
- Includes 1.5 m shower hose.
- Includes handshower bracket with angle adjustment.

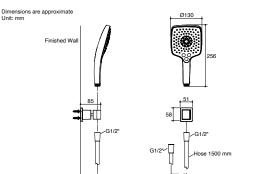


Note: The recommended dimension for installation can be adjusted according to user preferences and layour




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-10309T-CP

Citrus

Handshower with Hose and Bracket

- 4-function handshower.
- Includes 1.5m shower hose.
- Includes bracket.



K-28693T-CP

Shift+

Handshower with Hose and Bracket-Square

- Brass construction.
- Push button, 2-function handshower.
- Includes 1.5 m shower hose.
- Includes handshower bracket with angle adjustment.




K-28692T-CP


Shift+

Handshower with Hose and Bracket-Round


- Brass construction.
- Push button, 2-function handshower.
- Includes 1.5 m shower hose.
- Includes handshower bracket with angle adjustment.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

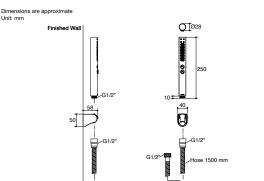

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-72714X-CP

Multi-Function Handshower with Hose and Bracket


- 3-function handshower.
- Includes 1.5 m shower hose.
- Includes handshower bracket.

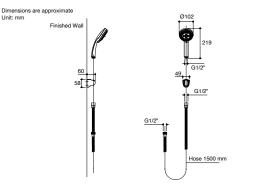

ote: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

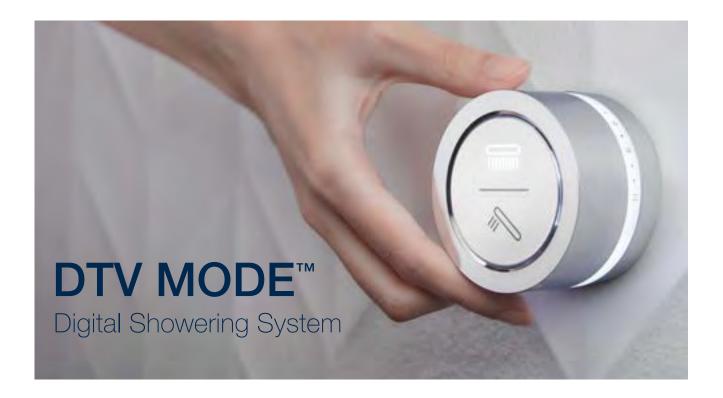



Easy control



Precise temperature control and customization



I Minimalist design, clean and uncluttered space

Why choose a digital shower like DTV Mode?

- Greater precision, control and customization than a manual shower.
- · Simple, easy to use, intuitive interface.
- Creates a clean, uncluttered space by removing multiple trim handles.
- Digital thermostatic valve technology guarantees accurate and safe.



Dual Shower



Bath and Shower



Bath Only


DTV Mode Key Features and Benefits

DTV Mode is Flexible. Designed for the most common bathing and showering configurations, DTV Mode uses one valve for multiple applications.

- Controls a maximum of 2 outlets.
- Available in 3 configurations.



Scan for more information

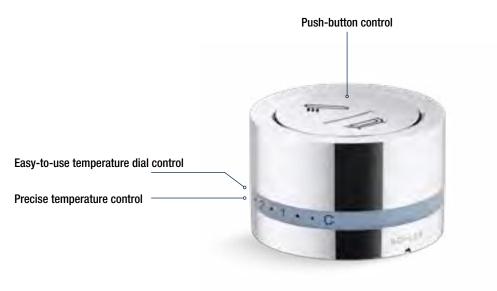



K-22327T-7-CP

DTV Mode

Dual Shower Set

- Brass construction.
- Intuitive control switch outlets and water temperature at the touch of a button, providing easy, convenience and safety.
- Minimalist styling, Stylish push button controller with led indicator lights.
- Precise thermostatic temperature control.
- Includes showerhead.
- Includes 3-function handshower.



K-22328T-7-CP

DTV Mode

Bath Filler and Handshower Set


- Brass construction.
- Intuitive control switch outlets and water temperature at the touch of a button, providing easy, convenience and safety.
- Minimalist styling, Stylish push button controller with led indicator lights.
- Precise thermostatic temperature control.
- Includes 2-function handshower.




K-22329T-7-CP

DTV Mode Bath Filler Set


- · Brass construction.
- Intuitive control switch outlets and water temperature at the touch of a button, providing easy, convenience and safety.
- Minimalist styling, Stylish push button controller with led indicator lights.
- Precise thermostatic temperature control.

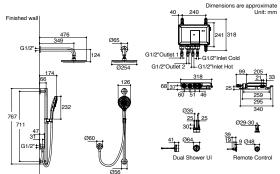


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

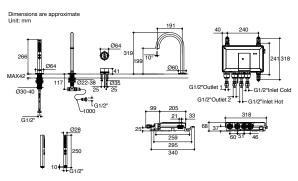

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

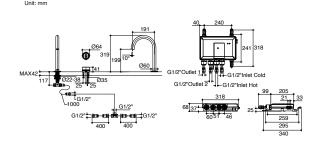

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Introducing ModuloTM from Kohler – a universal valve platform that makes installation easy and showers remarkable. Designed to house a variety of valve configurations, the durable casing installs easily into a range of wall types. The DZR-brass body inside ensures reliable performance you expect from Kohler. And, the entire system is completed by a collection of stylish trim options.

Modulo is not just another universal valve box. It's the box – reinvented.

Universal Box

Works with all Modulo valves for multiple shower installations

DurableForged D76

Forged DZR brass resists wear and leaks



Easy Installation

An integrated level and bracket ensure the box is properly aligned


Noise and Leak

> Dimensions are approximat Unit: mm

K-98699T-B-NA Modulo

Universal Box

- Brass construction.
- Leak-free noise reduction enclosure.
- Easy installation.
- Interchangeable valve/trim solutions.
- Includes outlet plug for single outlet applications.

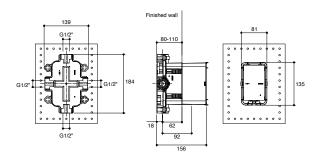

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Modulo_{TM}

Recessed Shower Valve Trim & Recessed Bath and Shower Valve Trim





Solid Metal Construction



Lasting Finish



Leak-free Ceramic Disc Valve



Easy, Sealant-free Installation



Choose Your Style



Required Accessories (K-98699T-B-NA)



Thermostatic Stop Valve



K-99729T-9-CP



K-99729T-9-BV *Non-stock item

Modulo Recessed Thermostatic Bath and Shower Valve and Trim-Geomatric

- Metal construction.
- Thermostatic temperature control with anti-scald technology.
- High-temperature limit button.
- · Adjustable flow control.
- Easy, sealant-free installation.
- Required Accessories
 Modulo universal Box (K-98699T-B-NA).




K-99730T-9-CP


Modulo Recessed Thermostatic Shower Only Valve And Trim-Geomatric

- Metal construction.
- Thermostatic temperature control with anti-scald technology.
- High-temperature limit button.
- · Adjustable flow control.
- Easy, sealant-free installation.
- Required Accessories Modulo universal Box (K-98699T-B-NA).

Dimensions are approximate

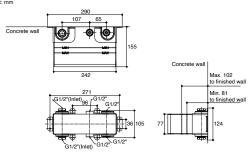



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate





Note: The recommended dimension for installation can be adjusted according to user preferences and layout





K-78024T-4-CP



K-78024T-4-RGD



K-78024T-4-AF



K-78024T-4-BN

Modulo Recessed Thermostatic Bath and Shower Valve and Trim-Components

- Brass construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes trim and handles.
- Lever handles.
- Required Accessories

Modulo Universal Box (K-98699T-B-NA)



K-78023T-4-CP



K-78023T-4-RGD



K-78023T-4-AF




K-78023T-4-BN


Modulo Recessed Thermostatic Bath and Shower Valve and Trim-Components

- Brass construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Includes trim and handles.
- · Lever handles.
- Required Accessories


Modulo Universal Box (K-98699T-B-NA)

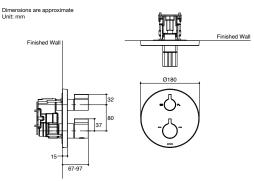


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Single-Control Valve without Diverter







K-99724T-B4-CP

K-99724T-B4-2BL K-99724T-B4-RGD






K-99724T-B4-AF


K-99724T-B4-BV

Modulo Recessed Shower Valve Trim-Contemporary

- Solid metal construction
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)

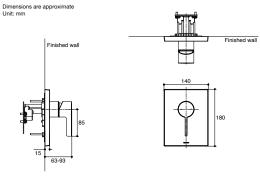

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)








K-72806T-C4-CP

K-72806T-C4-AF


K-72806T-C4-BV

Modulo Recessed Shower Valve Trim-Fairfax

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)

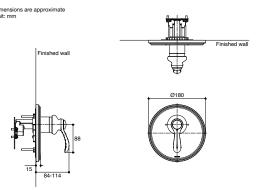

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-73101T-B4-CP

K-73101T-B4-BV

Modulo Recessed Shower Valve Trim-Composed

- Solid metal construction .
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)





K-99722T-B4-CP

K-99722T-B4-BV

Modulo Recessed Shower Valve Trim-Organic

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)




K-99961T-B4V-2MB


Modulo Classic shower only trim and valve-Memiors

- Solid metal construction.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)


Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

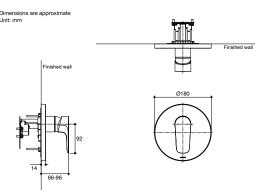


Note: The recommended dimension for installation can be adjusted according to user preferences and layou



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

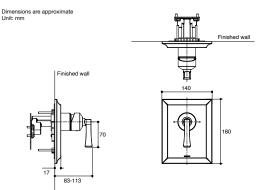

Note: The recommended dimension for installation can be adjusted according to user preferences and layout





K-72802T-B4-CP

Modulo Recessed Shower Valve Trim-Kelston

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)



K-99726T-B4-CP

Modulo Recessed Shower Valve Trim-Geometric


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)




K-97365T-B4-CP

Modulo Recessed Shower Valve Trim-Avid


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)

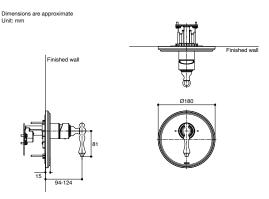


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

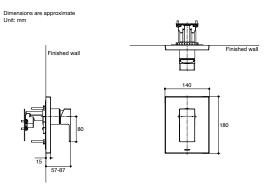


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

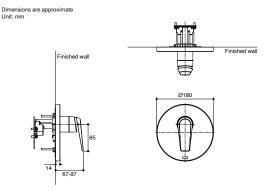

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.






Single-Control Valve with Diverter




Modulo Recessed Bath and Shower Valve Trim-Contemporary

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)

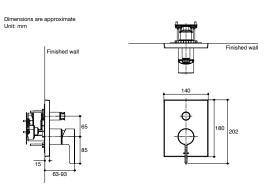

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)








K-72805T-C4-CP

K-72805T-C4-AF


K-72805T-C4-BV

Modulo Recessed Bath and Shower Valve Trim-Fairfax

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)

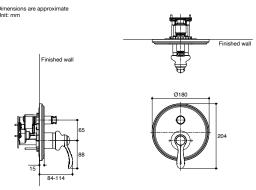

Note: The recommended dimension for installation can be adjusted according to user preferences and layout









K-72801T-B4-2BZ K-72801T-B4-CP

K-72801T-B4-RGD

Modulo Recessed Bath and Shower Valve Trim-Kelston

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)





K-73108T-B4-CP

K-73108T-B4-BV

Modulo Recessed Bath and Shower Valve Trim-Composed

- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)






K-99721T-B4-CP


K-99721T-B4-BV

Modulo Recessed Bath and Shower Valve Trim-Organic


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories Modulo Universal Box (K-98699T-B-NA)

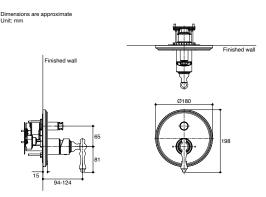


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)






Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

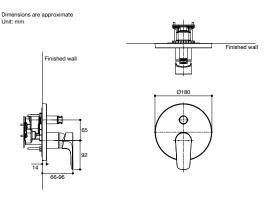

ended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-99960T-B4V-2MB

Modulo Classic Bath and Shower Trim and Valve-Memiors

- Solid metal construction.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)



K-99725T-B4-CP

Modulo Recessed Bath and Shower Valve Trim-Geometric


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)




K-97366T-B4-CP

Modulo Recessed Valve with Diverter and Hanlde-Avid


- Solid metal construction.
- Lift and turn handle operation.
- Easy, Sealant-free installation.
- Required Accessories
 Modulo Universal Box (K-98699T-B-NA)

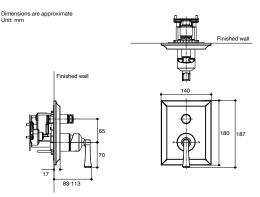


Note: The recommended dimension for installation can be adjusted according to user preferences and layou




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

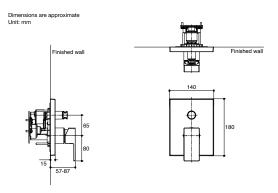


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

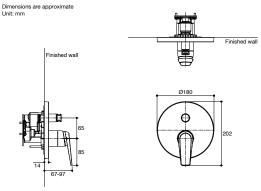

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-99865X-9-CP

Beitou

- Precise thermostatic temperature control with over-ridable temperature stop.
- Line-matched faucets and showerheads available.
- Required Accessories

Beitou Recessed Thermostatic 2-Way Valve Set (K-99869X-CP)



K-99869X-CP

Beitou

Recessed Thermostatic 2-Way Valve Set


- Brass construction.
- Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.
- Required Accessories

Rececessed Thermostatic 2-Way Trim (K-99865X-9-CP)

Recessed Thermostatic 2-Way Trim • Solid metal construction.


Note: The recommended dimension for installation can be adjusted according to user preferences and layout

|Finished Wall




Dimensions are approximate Unit: mm

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-99866X-9-CP

Beitou

Recessed Thermostatic 3-Way Trim


- Solid metal construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Line-matched faucets and showerheads available.

Required Accessories

Beitou Recessed Thermostatic 3-Way Valve Set (K-99870X-CP)

Dimensions are approximate Unit: mm

IFinished Wall 43-53



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-99870X-CP

Beitou

Recessed Thermostatic 3-Way Valve Set

- · Brass construction.
- Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.
- Required Accessories

Rececessed Thermostatic 3-Way Trim (K-99866X-9-CP)



K-99867X-9-CP

Beitou

Recessed Thermostatic 4-Way Trim

- Solid metal construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Line-matched faucets and showerheads available.

• Required Accessories

Beitou Recessed Thermostatic 4-Way Valve Set (K-99871X-CP)



K-99871X-CP

Beitou


Recessed Thermostatic 4-Way Valve Set

- Brass construction.
- Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.


• Required Accessories

Rececessed Thermostatic 4-Way Trim (K-99867X-9-CP)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

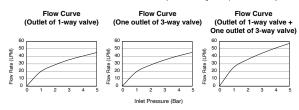



K-99868X-9-CP

Beitou

Recessed Thermostatic 5-Way Trim

- Solid metal construction.
- Precise thermostatic temperature control with over-ridable temperature stop.
- Line-matched faucets and showerheads available.
- Required Accessories

Beitou Recessed Thermostatic 5-Way Valve Set (K-99872X-CP)



K-99872X-CP


Beitou

Recessed Thermostatic 5-Way Valve Set

- Brass construction.
- Leak-free ceramic disc diverter valve with lifetime warranty.
- Includes water-tight housing for enhanced leak-protection and easy installation.
- Includes integral stops for easy water shut off and service.
- Required Accessories


Rececessed Thermostatic 5-Way Trim (K-99868X-9-CP)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Flow Curve Flow Curve Flow Curve (One outlet of 2-way valve) (Two outlet of 2-way valve) (One outlet of 3-way valve)

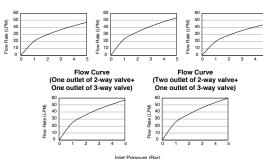

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

40 mm. Recessed Valve Trim

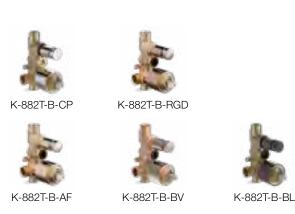


40 mm. Recessed Bath and Shower Valve

• Brass metal construction.




40 mm. Recessed Bath and Shower Trim-Classic


- Solid metal construction.
- Lever handle.
- Thin faceplate design.
- Required Accessories
 40 mm. Recessed Bath and Shower Valve (K-882T-B)

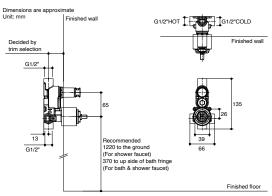

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

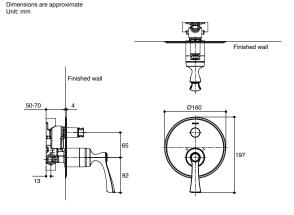


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



40 mm. Recessed Bath and Shower Trim-Round

- Solid metal construction.
- Lever handle.
- Thin faceplate design.
- Required Accessories
 40 mm. Recessed Bath and Shower Valve (K-882T-B)

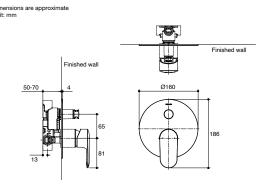

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-26478T-4-CP

K-26478T-4-BL

40 mm. Recessed Bath and Shower Trim-Square

- Solid metal construction.
- · Lever handle.
- Thin faceplate design.
- Required Accessories

40 mm. Recessed Bath and Shower Valve (K-882T-B)





K-880T-B-RGD

K-880T-B-CP





K-880T-B-AF

K-880T-B-BV

K-880T-B-BL

40 mm. Recessed Shower Valve

• Brass metal construction.





K-26481T-4-CP









K-26481T-4-BL

K-26481T-4-AF

K-26481T-4-BV

40 mm. Recessed Shower Trim-Classic

- Solid metal construction
- Lever handle.
- Thin faceplate design.
- Required Accessories

40 mm. Recessed Shower Valve (K-880T-B)






K-26477T-4-CP


K-26477T-4-BL

40 mm. Recessed Shower Trim-Round


- Solid metal construction.
- Lever handle.
- Thin faceplate design.
- Required Accessories

40 mm. Recessed Shower Valve (K-880T-B)

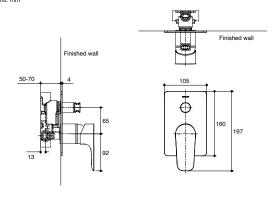


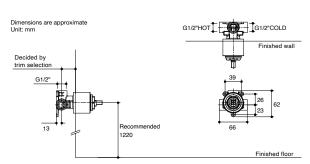


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

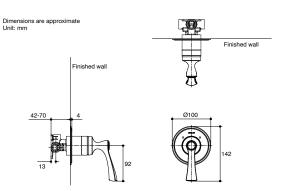

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

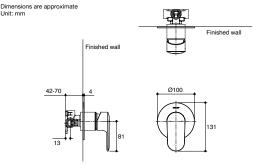

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.






K-26479T-4-CP

K-26479T-4-BL

40 mm. Recessed Shower Trim-Square

- Solid metal construction.
- Lever handle.
- Thin faceplate design.
- Required Accessories

40 mm. Recessed Shower Valve (K-880T-B)

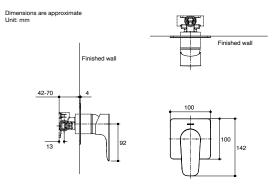

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

35 mm. Recessed Mixing Valve withTrim




K-29136X-4-CP


Accliv

Recessed Bath and Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.

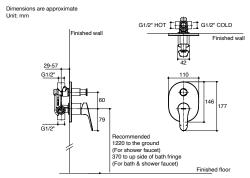

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-24753X-4-CP

Honesty

Recessed Bath and Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.

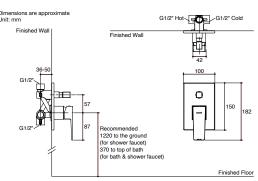



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-24752X-4-CP

Honesty

Recessed Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-24576X-4-CP

Kumin

Recessed Bath and Shower Valve Mixer

- Brass construction.
- Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.




K-24577X-4-CP


Kumin

Recessed Shower Valve Mixer


- Brass construction.
- Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

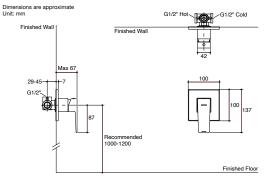


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

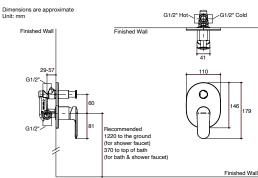


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

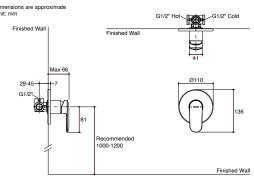

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-24572X-4-CP

Taut

Recessed Bath and Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.



K-24572X-4A-CP

Taut

Recessed Bath and Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.



K-24573X-4A-CP

Taut

Recessed Shower Valve Mixer


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

Dimensions are approximate Unit: mm


Finished Wall

Finish


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

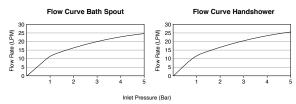


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

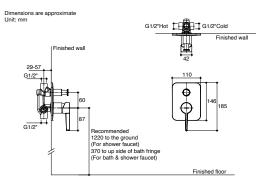


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

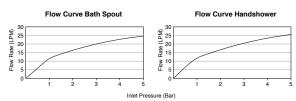

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

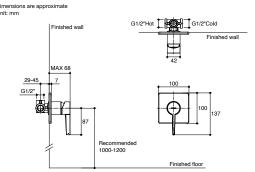

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-24573X-4-CP

Taut

Recessed Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-28956X-4-CP

Atom

Recessed Bath and Shower Valve Mixer

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.
- Includes diverter.



K-28955X-4-CP


Atom

Recessed Shower Valve Mixer


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

Dimensions are approximate Unit: mm G1/2" Hot Finished Wall Finished Wall Available Cold Finished Wall Recommended 1000-1200


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.








K-33115X-4CD-CP


Accliv

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

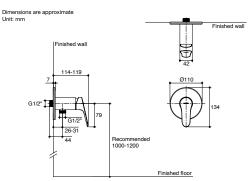

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-28953X-4CD-CP

Atom

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-28954X-4CD-CP

Atom

Recessed Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-28840X-4CD-CP


Beam

Wall-Mount Shower Valve-Cold Water Only


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

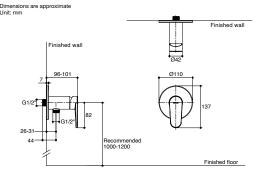

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-99257X-4CD-CP

Cuff

Recessed Shower Valve-Cold Water Only

- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift and turn activation.
- Easy sealant-free trim installation.



K-24750X-4CD-CP

Honesty

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-24751X-4CD-CP

Honestv


Recessed Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

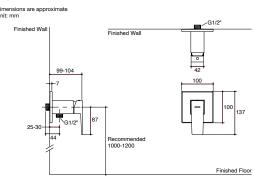


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

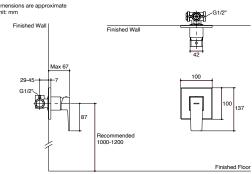

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-R99253X-4CD-CP

July

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- Easy sealant-free trim installation.



K-24578X-4CD-CP

Kumin

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.





K-24579X-4CD-CP

Kumin


Recessed Shower Valve-Cold Water Only

- Brass construction.
- Leak-free ceramic disc valve with lifetime warranty.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.







Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

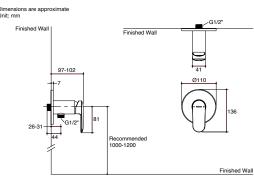


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

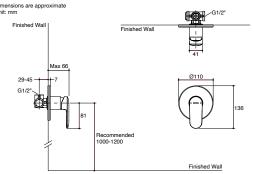

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-R99978T-4CD-CP

Kumin

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Included ceramic disc valve.
- Easy-sealant & free trim installation.
- Lift and turn handle.



K-99979T-4CD-CP

Kumin

Recessed Shower Valve-Cold Water Only

- Solid metal construction.
- Leak-free ceramic disk valve.
- Easy, sealant-free trim installation.
- Lift and turn handle operation.




K-R99254X-4CD-CP


Singulier

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- Easy sealant-free trim installation.




Note: The recommended dimension for installation can be adjusted according to user preferences and lavour




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm

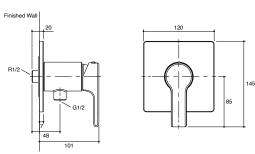

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-99258X-4CD-CP

Singulier

Recessed Shower Valve-Cold Water Only

- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- Easy sealant-free trim installation.



K-99255X-4CD-CP

Strayt

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Includes a 35 mm. ceramic valve cartridge for improved flow at lower pressures.
- Handle is lift & turn activation.
- Easy sealant-free trim installation.




K-24574X-4CD-CP


Taut

Wall-Mount Shower Valve-Cold Water Only


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.

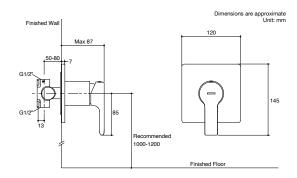


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

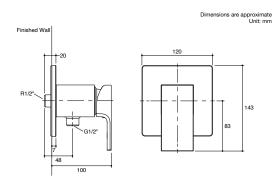


Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

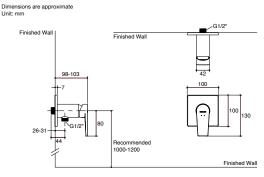

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-24575X-4CD-CP

Taut

Recessed Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.



K-74096T-4CD-CP

Taut

Wall-Mount Shower Valve-Cold Water Only

- Brass construction.
- Easy, sealant-free trim installation.
- Lever handle.




K-73193T-4CD-CP

Taut


Recessed Shower Valve-Cold Water Only

- Brass construction.
- Metal mounting hardware assures a secure installation.
- Easy, sealant-free trim installation.
- Lever handle.


Dimensions are approximate Unit: mm

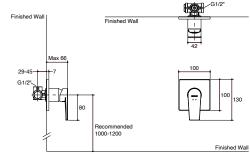


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

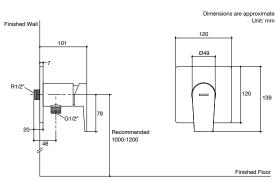


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

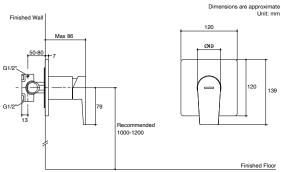

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



K-24575X-4ACD-CP

Taut

Recessed Shower Valve-Cold Water Only

- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




K-24574X-4ACD-CP


Taut

Wall-Mount Shower Valve-Cold Water Only


- Brass construction.
- Smaller size and reduce weight by using 35 mm. valve.
- Includes escutcheon.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

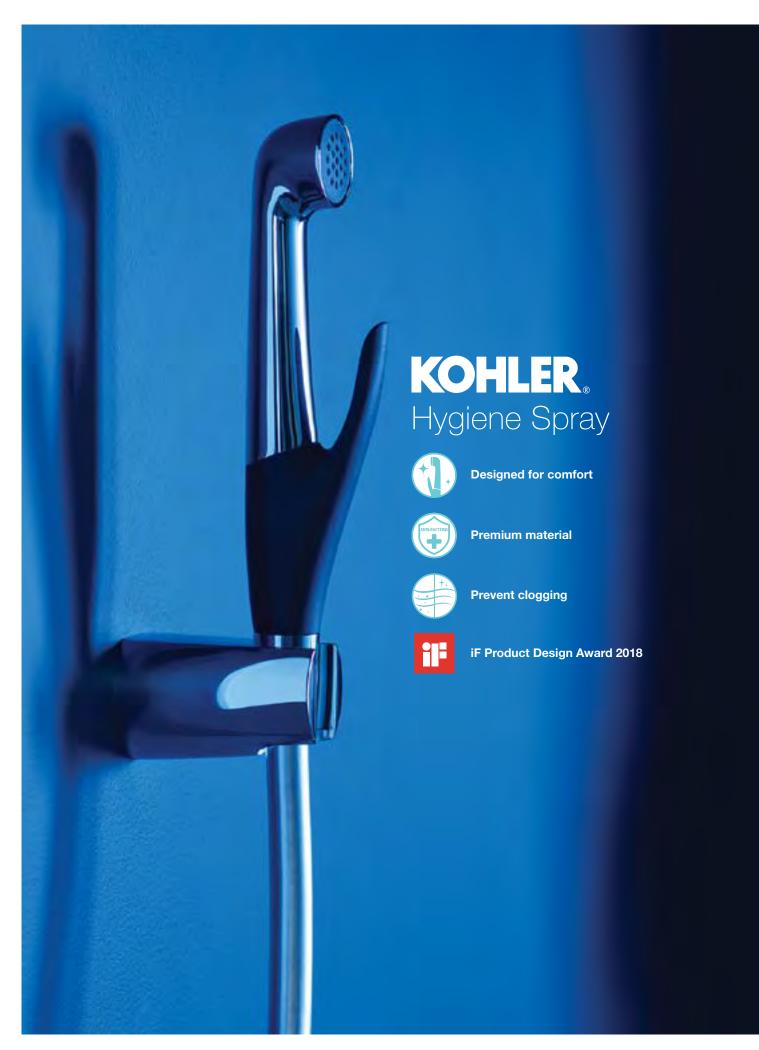



Luxe

Hygiene Spray with Hose and Fixed Wall Bracket


- Premium metal body.
- Anti-bacterial silicone material.
- Katalyst air-induction spray assures optimum coverage and comfort.
- Precision flow control meets all user needs regardless of your home's water pressure
- Ergonomic, easy clean design.
- Includes 1.2 m. flexible hose.



K-98100X-B-2MB K-98100X-B-2BZ K-98100X-B-BL K-98100X-B-C

Hygiene Spray with Hose and Fixed Wall Bracket

- Include 1.2 m flexible metal supply hose ease of use and good durability.
- Include 1.2 m PVC supply hose. (K-98100X-B-2BZ and K-98100X-B-BL).
- Easy grip design with special anti-slipping features.
- Includes wall bracket and mounting fasteners suitable for various wall types.
- Includes metal screen washer to prevent clogging.
- Compliments most Kohler product lines.

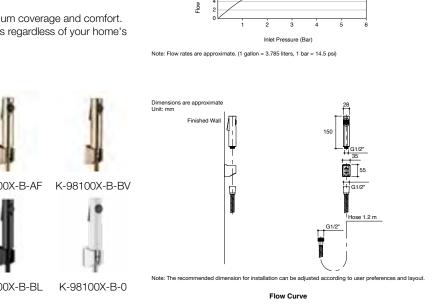

Rate (LPM)

G1/2"

Flow Curve

ation can be adjusted according to user preferences and layout


Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Elate

Hygiene Spray with Hose and Fixed Wall Bracket

- Include 1.2 m flexible metal supply hose ease of use and good durability.
- Includes a screen washer to prevent clogging.
- Includes a wall bracket with mounting fasteners suitable for various finished wall materials.
- · Soft spray design.
- Ergonomic button design.
- Long life and durable design.
- Include 1.2 m PVC supply hose. (K-97258X-B-BL).

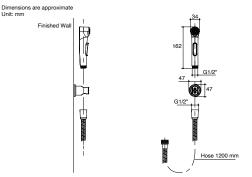

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-R76389X-9-BL

Stop Valve


• Brass construction.




K-33984X-9-CP

Four-Way Stop Valve


- Brass construction.
- 3-outlet water way.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

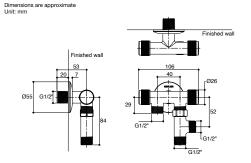

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-33983X-9-CP

Three-Way Stop Valve

- Brass construction.
- 2-outlet water way.



K-16086X-4-BN



K-16086X-4-AF



K-16086X-4-RGD



K-16086X-4-BV

July Stop Valve

• Brass construction.




K-R16086X-4-CP


July Stop Valve

Brass construction.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-12066T-3-CP



K-12066T-3-BN

K-12066T-3-2MB



K-12066T-3-AF



K-12066T-3-BV



K-R12066X-3-BL

Stop Valve

• Brass construction.



K-80158X-9-BL

Complementary Angle Valve

• Premium Metal Construction..




K-R11711X-4-CP

Singulier Stop Valve


• Brass construction.

Dimensions are approximate






Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate Unit: mm

Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




6

K-R37317X-4-CP


Cuff

Stop Valve
• Brass construction.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Shower Hose




K-11628X-2MB

Shower Hose 1500 mm.

K-11628X-BL

• Includes metal screen washer to prevent clogging.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-SP831727-CP

Shower Hose 1500 mm.

• Includes metal screen washer to prevent clogging.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-12067T-BV

Flexible Hose 1500 mm.



Bath Spout without Diverter



K-74046T-BL

Taut

Bath Spout

- Spout reach: 200 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.



K-74046X-B-CP

Taut Bath Spout


- Spout reach: 162 mm.
- Brass construction.
- Coin aerator allows for easy cleaning and maintenance.




K-37344X-CP

Strayt Bath Spout

- Spout reach: 160 mm.
- Brass construction.

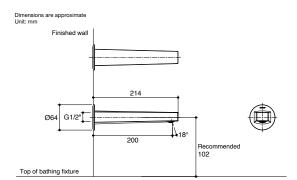


Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Note: The recommended dimension for installation can be adjusted according to user preferences and layour



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Bath Spout with Diverter for Handshower




K-37343X-CP


Strayt

Bath Spout with Diverter

- Reach: 160 mm.
- Brass construction.



Note: The recommended dimension for installation can be adjusted according to user preferences and layour



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Deck-Mount Diverters and Handshowers




K-72663T-CP


Memoirs

Deck-Mount Diverter and Handshower

- Brass construction.
- Katalyst air-induction technology for powerful and even coverage.
- 122 mm. spray-plate diameter.
- 5-function handshower

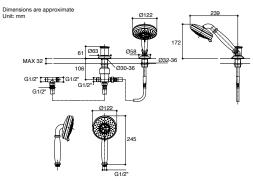

Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Wall-Mount Connection



K-98354X-CP

K-98354X-BV





K-98354T-2MB

K-98354T-BL

Exhale

Supply Elbow with Bracket

- Brass construction.
- Adjustable bracket.




K-98352X-CP

K-98352X-BV

Exhale Supply Elbow

Brass construction.





Finished Wall

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.







K-72796T-CP

K-72796T-BV


K-72796T-2BZ

Artifacts

Wall-Mount Supply Elbow


- Brass construction.
- Includes check valve for back flow prevention.


Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm



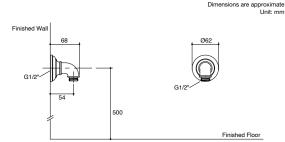






Round Connection
• Brass construction.




Wall Supply Elbow Square Connection
• Brass construction.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm

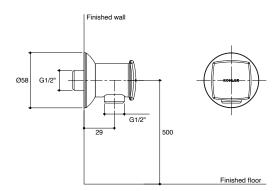

Bracket



Statement


Wall Supply with Bracket

- Solid metal construction.
- For use with a handshower and hose.
- Coordinates with other products in the Statement collection.



Exhale Shower Bracket

- Brass construction.
- Adjustable bracket.

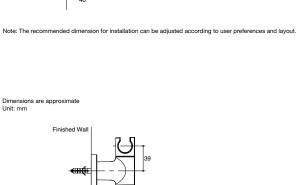


118 104

Dimensions are approximate Unit: mm

G1/2" -

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Refinia
Shower Bracket

• Adjustable bracket.

Finished wall



K-422T-2MB

Memoirs

Wall-Mount Bracket

- Brass construction.
- Bracket pivots and rotates to position handshower at desired angle.




K-98348T-CP

Renew


Handshower Bracket

• Brass construction.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

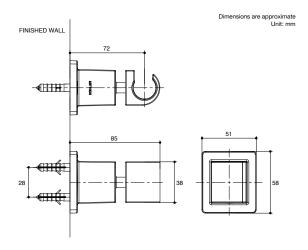

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Slide Bar



Statement 80 cm. slide bar


- Brass construction.
- 80 cm. adjustable slidebar supports a handshower.



Statement


- 80 cm. slide bar with integrated water supply.
- Brass construction.
- Integrated water supply allows water to be plumbed directly through slidebar.
- 80 cm. adjustable slidebar supports a handshower.

Dimensions are approximate



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm






Artifacts

Slide Bar

- · Brass construction.
- Required Accessories
 Artifacts Slide Bar Trim (K-72799T), sold separately.

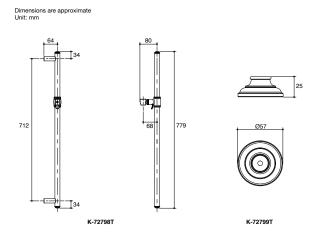


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Handshower Slide Bar

- Brass construction.
- Required Accessories

Memoirs Slide Bar Trim (K-421T), sold separately. Components Slide Bar Trim (K-20214T), sold separately.

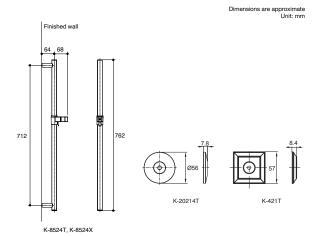


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Accliv

Slide Bar

- · Brass construction.
- Wall mounting hardware assures a secure installation.
- Includes adjustable bracket.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-12879K-CP

Slide Bar 80 cm.

- Length 80 cm.
- Includes bracket and soap dish with angle adjustment.




K-72740T-CP


Rainjoy

Slide Bar

- Brass construction.
- Includes adjustable bracket.

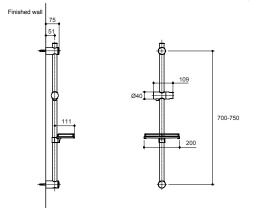

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

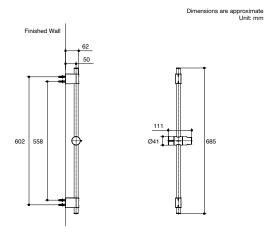

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




K-2738T-CP K-2696T-CP

Stillness

Water Supply Slide Bar

Brass construction

- Integrated water supply allows water to be plumbed directly through slide bar.
- Required Accessories
 Stillness Slide Bar Trim (K-2696T-CP), sold separately.

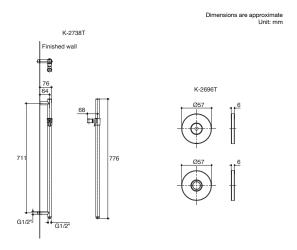

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Bottle Trap



K-9071T-CP

Bottle Trap (31 cm.)

- Brass construction.
- Suitable for KOHLER pop-up drain and click drain.



K-9071T-ZY-CP

Bottle Trap (40.5 cm.)

- Brass construction.
- Suitable for KOHLER pop-up drain and click drain.




K-97173X-CP

Bottle Trap with Tailpiece


- Metal construction.
- Intended for console table and vessel installtions.
- 1-1/4" diameter slip-fit inlet.
- Removable trap eye for easy cleaning.
- Includes 250 mm. extension tube.

Dimensions are approximate Unit: mm

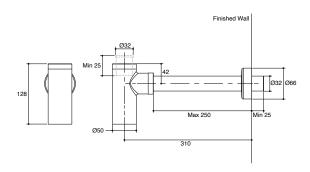


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm

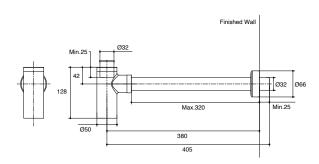

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate

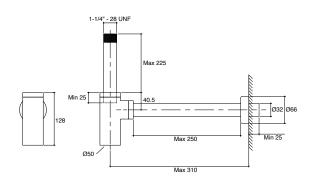

Drain



K-75422T-CP

Hidden Floor Drain 10x10 cm.

- Brass construction.
- Water drain discharge rate 24.5 liter/minute.




K-75423T-CP


Hidden Floor Drain


- Premium material construction.
- Water drain discharge rate 37.1 liter/minute.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




K-R7275T-B-CP

Floor Drain

- Brass construction.
- Water drain discharge rate 30.8 liter/minute.

Dimensions are approximate Unit: mm





- Click-up Waste

 Brass construction.
- Diameter 56 mm.







K-7119T-BL


- Touch Activated Drain
- Diameter 60 mm.

• Brass construction.




Dimensions are approximate Unit: mm






Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




K-1458517-U-CP



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm




Dimensions are approximate Unit: mm



K-834753-CP

- Pop-up Drain
 Brass construction.
- Diameter 54 mm.
- Includes link kit.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-SP880037

Link Kit




Supply Hose

Dimensions are approximate Unit: mm



K-1177889

Supply Hose 16"




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.


Dimensions are approximate Unit: mm



Supply Hose 18"





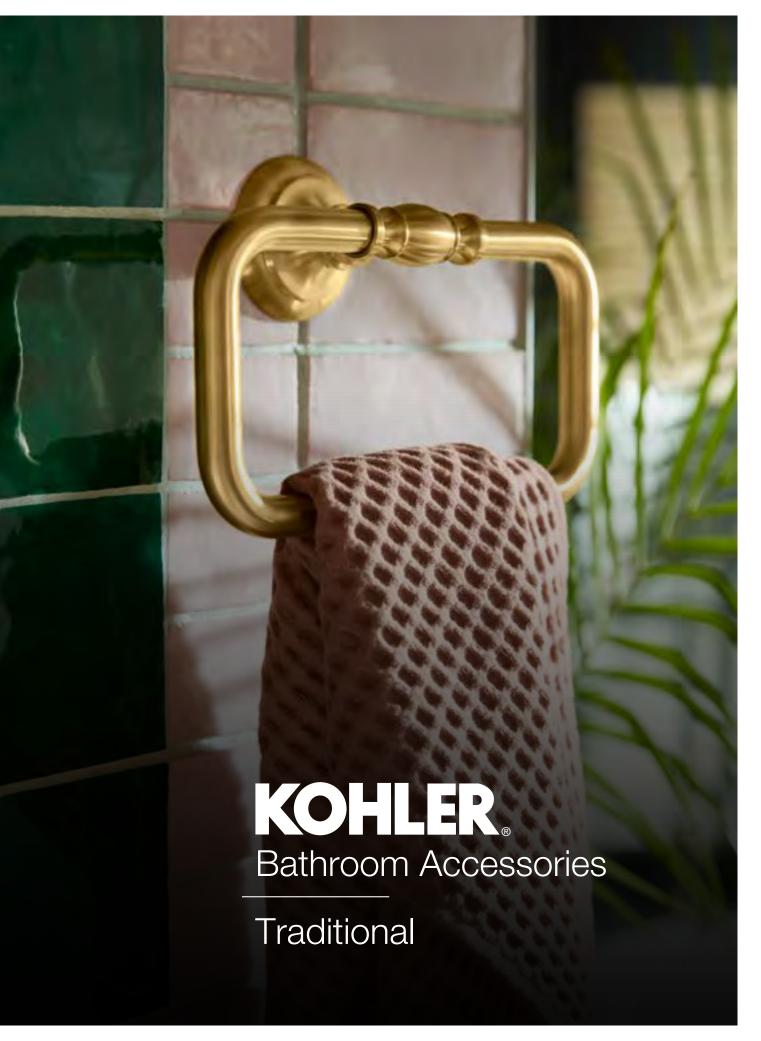


Artifacts™ **Bathroom Accessories**



Artifacts

24" Towel Bar

- Dimension 686 x 104 x 104 mm.
- Metal construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-72572T-CP



K-72572T-BV



K-72572T-2BZ

Artifacts

Double Robe Hook

- Dimension 124 x 68 x 70 mm.
- Metal construction.
- Durable Kohler finishes resist corrosion and tarnishing.

 Includes installation hardware for easy
- installation.

Dimensions are approximate Unit: mm





K-72573T-CP



K-72573T-BV




K-72573T-2BZ

Artifacts

Toilet Tissue Holder

- Dimension 224 x 152 x 65 mm.
- Metal construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.





K-72571T-CP



K-72571T-BV




Artifacts

Towel Ring

- Dimension 218 x 75 x 142 mm.
- Metal construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

Dimensions are approximat



Note: The recommended dimension for installation can be adjusted according to user preferences and layour



K-72576T-CP



K-72576T-BV




K-72576T-2BZ

Artifacts

Toilet Tissue Holder (Vertical)

- Dimension 144 x 170 x 162 mm.
- Metal construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

Dimensions are approximat




Capilano™ **Bathroom Accessories**



Capilano

24" Towel Bar

- Dimension 665 x 87 x 56 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.






Capilano 18" Towel Bar

- Dimension 513 x 87 x 56 mm.
- Premium metal construction for durability and reliability.

 • Kohler finishes resist corrosion and
- tarnishing.








K-R26683-CP



Capilano

Toilet Paper Holder

- Dimension 70 x 110 x 200 mm.
 Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.






K-R26684-CP



Capilano Towel Ring

- Dimension 175 x 71 x 197 mm.
- Premium metal construction for durability and reliability.
- bility and reliability.Kohler finishes resist corrosion and tarnishing.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-R26685-CP



K-R26685-2BZ

Capilano

Robe Hook

- Dimension 71 x 70 x 56 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.









Coralais™ Bathroom Accessories




Coralais

18" Towel Bar

- Dimension 516 x 93 x 59 mm.
- Brass construction.
- Includes installation hardware.

Dimensions are approximate



Note: The recommended dimension for installation can be adjusted according to user preferences and lavor




Coralais

24" Towel Bar

- Dimension 669 x 93 x 59 mm.
- Brass construction.
- Includes installation hardware.

Dimensions are approximat Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Coralais Glass Shelf

- Dimension 609 x 115 x 59 mm.
- Brass construction.
- Includes installation hardware.

Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layou



K-13447T-CP

Coralais

24" Double Towel Bar

- Dimension 659 x 152 x 85 mm.
- Brass construction.
- Includes installation hardware.

059



Coralais

Towel Shelf

- Dimension 669 x 250 x 122 mm.
- · Brass construction.
- Includes installation hardware.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approxima Unit: mm



K-13457T-CP

Coralais

Double Robe Hook

- Dimension 84 x 93 x 59 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




K-13435T-CP

Coralais Towel Ring

- Dimension 181 x 93 x 201 mm.
- Brass construction.
- Includes installation hardware.

Dimensions are approximate



Note: The recommended dimension for installation can be adjusted according to user preferences and layout

00

K-13433T-CP

Coralais Robe Hook

- Dimension 59 x 60 x 59 mm.
- Brass construction.
- Includes installation hardware.

Ø59 28






K-13429T-CP

Coralais Soap Holder

- Dimension 145 x 127 x 59 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.


6

K-13459T-CP

Coralais

Toilet Tissue Holder

- Dimension 147 x 93 x 138 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-13434T-CP

Coralais Towel Ring

- Dimension 218 x 93 x 59 mm.
- Brass construction.
- Includes installation hardware.




Devonshire™ Bathroom Accessories



Devonshire 18" Towel Bar

- Dimension 518 x 85 x 61 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and lavour



Devonshire 24" Towel Bar

- Dimension 670 x 85 x 61 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layou



K-10553-CP

Devonshire Double Towel Bar

- Dimension 670 x 139 x 103 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-10557-CP

Devonshire Towel Ring

- Dimension 191 x 73 x 200 mm.
- Brass construction.
- Includes installation hardware.





Devonshire Robe Hook

- Dimension 61 x 81 x 83 mm.Brass construction.
- Includes installation hardware.




Dimensions are approximate Unit: mm



K-10554-CP

Devonshire Toilet Tissue Holder

- Dimension 254 x 85 x 61 mm.
- Brass construction.
- Includes installation hardware.




Fairfax™ **Bathroom Accessories**



Fairfax

24" Towel Bar

- Dimension 673 x 102 x 64 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.






Fairfax

24" Double Towel Shelf

- Dimension 673 x 242 x 124 mm.
- · Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.






Fairfax

Glass Shelf

- Dimension 572 x 165 x 64 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.





K-12156X-CP






K-12156X-BN

Fairfax

Single Robe Hook

- Dimension 64 x 92 x 77 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.





K-12153X-CP



K-12153X-BV




K-12153X-BN

Fairfax

Double Robe Hook

- Dimension 80 x 102 x 76 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-12162X-CP



K-12162X-BV




K-12162X-BN

Fairfax

Soap Dish Holder

- Dimension 140 x 169 x 82 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.



144

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-12157X-CP



K-12157X-BV




K-12157X-BN

Fairfax

Toilet Paper Holder

- Dimension 165 x 86 x 121 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Memoirs™ Stately Bathroom Accessories



Memoirs Stately 24" Towel Bar

- Dimension 656 x 84 x 47 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layour



Memoirs Stately

24" Double Towel Shelf

- Dimension 662 x 197 x 120 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layou




Memoirs Stately

Towel Ring

- Dimension 162 x 84 x 181 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.

Dimensions are approximate Unit: mm





K-492X-CP



K-492T-2MB




K-492X-RGD

Memoirs Stately

Robe Hook

- Dimension 65 x 84 x 54 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-37352X-CP



K-37352T-2MB




K-37352X-RGD

Memoirs Stately

Covered Toilet Paper Holder

- Dimension 157 x 128 x 127 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layou




K-490T-2MB

Memoirs Stately Paper Holder

- Dimension 155 x 84 x 124 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware.

Dimensions are approximate




Occasion™ **Bathroom Accessories**



Occasion

18" Towel Bar

- Dimension 516 x 88 x 59 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Occasion

24" Towel Bar

- Dimension 668 x 88 x 59 mm.
- Brass construction.
- Includes installation hardware.






Occasion

24" Double Towel Bar

- Dimension 668 x 148 x 94 mm.
- Brass construction.
- Includes installation hardware.






K-EX27063T-BL

Occasion

Towel Ring

- Dimension 194 x 88 x 140 mm.
- Brass construction.
- Includes installation hardware.






K-EX27068T-CP



Occasion

Covered Tissue Paper Holder with Tray

- Dimension 249 x 141 x 137 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




K-EX27069T-CP



K-EX27069T-BL

Occasion Robe Hook

- Dimension 59 x 77 x 59 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-EX27070T-CP




K-EX27070T-BL

Occasion

Double Robe Hook

- Dimension 120 x 92 x 59 mm.
- Brass construction.
- Includes installation hardware.






Components™ Bathroom Accessories



Components 18" Towel Bar

- Dimension 517 x 75 x 60 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Components

24" Towel Bar

- Dimension 670 x 75 x 60 mm.
- Brass construction.
- Includes installation hardware.



Dimensions are approximate Unit: mm


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Components

24" Double Towel Bar


- Dimension 670 x 159 x 60 mm.
- Brass construction.
- Includes installation hardware.





Components

- 24" Double Towel Shelf • Dimension 670 x 223 x 161 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Components

- Towel Arm
- Dimension 255 x 75 x 60 mm.
- Brass construction.
- Includes installation hardware.




ed dimension for installation can be adjusted according to user preferences and layout.



Components Robe Hook

- Dimension 60 x 101 x 60 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Components

Double Towel Arm

- Dimension 406 x 75 x 60 mm.
- Brass construction.
- Includes installation hardware.







Components Toilet Paper Holder

K-78382T-AF


• Dimension 193 x 97 x 60 mm.

K-78382T-BL

K-78382T-2MB

- Brass construction.
- Includes installation hardware.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Components Vertical Toilet Paper Holder • Dimension 60 x 103 x 169 mm.

- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Components

Covered Double Toilet Paper Holder

- Dimension 294 x 157 x 108 mm.
- Brass construction.
- Includes installation hardware.



sion for installation can be adjusted according to user preferences and layout.


Avid™ Bathroom Accessories



Avid

24" Towel Bar

- Dimension 655 x 70 x 45 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.




Note: The recommended dimension for installation can be editated according to the profession and laws.



Avid

24" Double Towel Shelf

- Dimension 655 x 259 x 119 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Avid

Covered Toilet Paper Holder

- Dimension 142 x 132 x 82 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

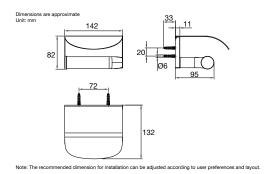




Avid

Robe Hook

- Dimension 45 x 47 x 68 mm.
- · Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layou




Avid

Towel Ring

- Dimension 252 x 70 x 45 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

Dimensions are approximate



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Avid

Double Robe Hook

- Dimension 121 x 47 x 68 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

imensions are approximate Init: mm






Avid

18" Towel Bar

- Dimension 502 x 70 x 45 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

Dimensions are approximate




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Avid

24" Double Towel Bar

- Dimension 655 x 133 x 45 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Avid

Toilet Paper Holder (Vertical)

- Dimension 45 x 129 x 148 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware for easy installation.

Dimensions are approximate



Cursiva™ Bathroom Accessories




Cursiva

24" Towel Bar


- Dimension 667 x 73 x 57 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Dimensions are approximate




No. 7

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layou

Cursiva

18" Towel Bar

- Dimension 514 x 73 x 57 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.



K-R26687-CP

K-R26687-CP

K-R26688-CP



K-R26688-CP

Cursiva

Toilet Paper Holder

- Dimension 186 x 83 x 57 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.



K-R26689-CP



K-R26689-CP

Cursiva

Towel Ring

- Dimension 251 x 73 x 57 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.





K-R26690-CP

Cursiva

Robe Hook

- Dimension 57 x 57 x 60 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.

Eolia™ Bathroom Accessories




K-17521T-CP

Eolia

24" Towel Bar

- Dimension 686 x 80 x 55 mm.
- Brass construction.
- Includes installation hardware.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate




K-17529T-CP

Eolia

24" Towel Shelf

- Dimension 681 x 250 x 115 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximat Unit: mm




K-17522T-CP

Eolia

24" Double Towel Bar

- Dimension 700 x 127 x 55 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout


Dimensions are approximate Unit: mm



Eolia

Glass Shelf

- Dimension 585 x 109 x 55 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximat Unit: mm



Eolia

24" Towel Ring

- Dimension 154 x 45 x 164 mm.
- Brass construction.
- Includes installation hardware.





K-17526T-CP

Eolia

Robe Hook

- Dimension 55 x 45 x 55 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-17523T-CP

Eolia

Toilet Tissue Holder

- Dimension 159 x 80 x 55 mm.
- Brass construction.
- Includes installation hardware.






K-17524T-CP

Eolia

Soap Dish

- Dimension 126 x 97 x 55 mm.
- Brass construction.
- Includes installation hardware.







K-17525T-CP

Toothbrush and Glass Tumbler Holder

- Dimension 126 x 97 x 55 mm.
- Brass construction.
- Includes installation hardware.


Stainless Toilet Brush with Handle







• Dimension 85 x 85 x 371 mm. • Brass construction.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.





K-17530T-ST

K-17531T-ST

Eolia Step Can

- Dimension 210 x 210 x 315 mm.
- Brass construction.

July™

Bathroom Accessories




July

24" Double Towel Shelf

- Dimension 610 x 180 x 97 mm.
- Brass construction.
- Includes installation hardware.








July 24" Double Towel Bar

- Dimension 610 x 148 x 32 mm.
- Brass construction.
- Includes installation hardware.






July

18" Towel Bar

- Dimension 457 x 103 x 32 mm.
- Brass construction.
- Includes installation hardware.





July 24" Towel Bar


- Dimension 610 x 103 x 32 mm.
- Brass construction.
- Includes installation hardware.





Glass Shelf

- Dimension 610 x 149 x 32 mm.
- Brass construction.
- Includes installation hardware.






K-72903T-S

July

Double Covered Toilet Tissue Holder

- Dimension 285 x 151 x 158 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate

Dimensions are approximate Unit: mm




K-9316T-CP

July

Double Toilet Tissue Holder

- Dimension 315 x 83 x 32 mm.
- · Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Dimensions are approximate Unit: mm




K-45403T-CP

July

Covered Toilet Tissue Holder

- Dimension 177 x 112 x 69 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Dimensions are approximate Unit: mm




K-45402T-CP

July

Toilet Tissue Holder

- Dimension 177 x 83 x 32 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm




K-45395T-CP

July

Soap Dish

- Dimension 120 x 115 x 37 mm.
- Brass construction.
- Includes installation hardware.



Dimensions are approximate Unit: mm



K-45394T-CF

July Robe Hook

- Dimension 37 x 71 x 37 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate




K-9317T-CP

July

Double Robe Hook

- Dimension 102 x 67 x 32 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate Unit: mm




K-45401T-CP

July

Towel Ring

- Dimension 212 x 83 x 32 mm.
- Brass construction.
- Includes installation hardware.



$Kumin^{\scriptscriptstyle\mathsf{TM}}$

Bathroom Accessories




Kumin

24" Towel Bar

- Dimension 610 x 76 x 45 mm.
- Brass construction.
- Includes installation hardware.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

K-97890T-CP

Kumin

24" Double Towel Bar

- Dimension 610 x 140 x 45 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Kumin

24" Double Towel Shelf

- Dimension 610 x 166 x 122 mm.
- Brass construction.
- Includes installation hardware.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.


Unit: mm



Kumin

18" Towel Bar

- Dimension 457 x 76 x 45 mm.
- Brass construction.
- Includes installation hardware.






K-97897T-CP

July Double Robe Hook


- Dimension 45 x 85 x 65 mm.
- Brass construction.
- Includes installation hardware.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-97898T-CP

July

- Towel Ring

 Dimension 148 x 84 x 176 mm.
- Brass construction.
- Includes installation hardware.



K-97901T-CP

July

Covered Toilet Paper Holder

- Dimension 139 x 116 x 97 mm.
- Brass construction.
- Includes installation hardware.

Loure™ **Bathroom Accessories**



Loure

24" Towel Bar

- Dimension 630 x 64 x 95 mm.
- Brass construction.
- Includes installation hardware.



Loure

24" Double Towel Bar

- Dimension 630 x 137 x 95 mm.
- Brass construction.
- Includes installation hardware.



K-11745T-CP

Loure

Towel Shelf

- Dimension 630 x 280 x 157 mm.
- Brass construction.
- Includes installation hardware.



K-11587T-CP

Loure

- Towel Ring


 Dimension 305 x 70 x 95 mm.
- · Brass construction.
- Includes installation hardware.





Toilet Tissue Holder


- Dimension 51 x 120 x 128 mm.
- Brass construction.
- Includes installation hardware.














Setra™ Bathroom Accessories



Setra

24" Towel Bar

- Dimension 664 x 76 x 54 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.



Setra

18" Towel Bar

- Dimension 511 x 76 x 54 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.







K-R26693-CP

K-R26693-BN

K-R26693-BL

Setra

Toilet Paper Holder

- Dimension 164 x 89 x 54 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.







K-R26694-CP

K-R26694-BN

K-R26694-BL

Setra

Towel Ring

- Dimension 162 x 76 x 189 mm.
- Premium metal construction for durability and reliability.
- · Kohler finishes resist corrosion and tarnishing.







K-R26695-CP

K-R26695-BN


K-R26695-BL

Setra

Toilet Paper Holder

- Dimension 164 x 89 x 54 mm.
- Premium metal construction for durability and reliability.
- Kohler finishes resist corrosion and tarnishing.

Dimensions are approximate





Note: The recommended dimension for installation can be adjusted according to user preferences and layout


Dimensions are approximate






Note: The recommended dimension for installation can be adjusted according to user preferences and layou

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layour

Dimensions are approximate



Note: The recommended dimension for installation can be adjusted according to user preferences and layour

Dimensions are approximat




Singulier™ **Bathroom Accessories**




Singulier 24" Towel Bar


- Dimension 609 x 68 x 32 mm.
- Brass construction.
- Includes installation hardware.









te: The recommended dimension for installation can be adjusted according to user preferences and layout







Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Singulier 24" Double Towel Bar

- Dimension 92 x 610 x 32 mm.
- Brass construction.
- Includes installation hardware.



K-15206T-CP

K-15215T-CP

Singulier Glass Shelf

- Dimension 641 x 110 x 32 mm.
- Brass construction.
- Includes installation hardware.



Singulier

Towel Shelf

- Dimension 609 x 240 x 78 mm.
- Brass construction.
- Includes installation hardware.



K-15209T-CP

Singulier

Robe Hook

- Dimension 30 x 75 x 46 mm.
- Brass construction.
- Includes installation hardware.




K-15218T-CP

Singulier

Double Robe Hook


- Dimension 136 x 75 x 46 mm.
- Brass construction.
- Includes installation hardware.




nmended dimension for installation can be adjusted according to user preferences and layout


Dimensions are approximate Unit: mm

Dimensions are approximate Unit: mm



te: The recommended dimension for installation can be adjusted according to user preferences and layout.





Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Singulier

Toilet Tissue Holder

- Dimension 75 x 108 x 147 mm.Brass construction.
- Includes installation hardware.



K-15217T-CP

K-15207T-CP

Singulier Toilet Tissue Holder

- Dimension 150 x 147 x 119 mm.
- Brass construction.
- Includes installation hardware.



K-15208T-CP

Singulier Towel Shelf

- Dimension 250 x 120 x 32 mm.
- Brass construction.
- Includes installation hardware.

Square™ **Bathroom Accessories**




Square


24" Towel Bar


• Dimension 660 x 78 x 50 mm.

• Dimension 507 x 78 x 50 mm. Premium metal construction. • Installation hardware and template

- Premium metal construction.
- Installation hardware and template included.









K-23284X-CP

K-23284X-BL

K-23286X-CP



K-23286X-BL


Square

Square 18" Towel Bar

included.

12" Towel Bar

- Dimension 355 x 78 x 50 mm.
- Premium metal construction.
- Installation hardware and template included.





-23288X-CP




K-23288X-BL

Square

Double Toilet Tissue Holder

- Dimension 268 x 94 x 50 mm.
- Premium metal construction.
- Installation hardware and template included.





K-23292X-CP




K-23292X-BL

Square

Toilet Tissue Holder

- Dimension 159 x 90 x 50 mm.
- Premium metal construction.
- Installation hardware and template included.





K-23289X-CP




K-23289X-BL

Square

Vertical Toilet Tissue Holder

- Dimension 50 x 100 x 145 mm.
- Premium metal construction.
- Installation hardware and template included.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Dimensions are approximate



K-23291X-CP




K-23291X-BL

Square

Towel Arm

- Dimension 254 x 78 x 50 mm.
- Premium metal construction.
- Installation hardware and template included.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout

Dimensions are approximate Unit: mm



K-23290X-CP



K-23290X-BL

Square

Robe Hook

- Dimension 50 x 86 x 50 mm.
- Premium metal construction.
- Installation hardware and template included.



Stages™ **Bathroom Accessories**








Frame 600 mm Dimension 600 x 120 x 110 mm. Brass construction.

Stages

Durable Kohler finishes resist corrosion and tarnishing. Two-tier frame allows for storage and

hanging of bathroom items. Includes installation hardware and

template for easy installation.







K-27353X-CP



K-27353X-RGD




K-27353X-BN

Stages

Frame 300 mm

- Dimension 300 x 120 x 110 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Two-tier frame allows for storage and hanging of bathroom items.
- · Includes installation hardware and template for easy installation.







K-27354X-CP



K-27354X-RGD



K-27354X-BN

Stages

Frame 150 mm

- Dimension 150 x 120 x 110 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Two-tier frame allows for storage and hanging of bathroom items.
- Includes installation hardware and template for easy installation.





K-27362X-CP



K-27362X-RGD




K-27362X-BN

Stages

Toilet Paper Holder (without Shelf)

- Dimension 150 x 120 x 122 mm.
- Brass construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- Includes installation hardware and template for easy installation.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout



K-27363X-CP



K-27363X-RGD




K-27363X-BN

Stages

Wall Hook

- Dimension 20 x 60 x 110 mm.
- Solid metal construction.
- Durable Kohler finishes resist corrosion and tarnishing.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



K-30377X-CP



K-30377X-RGD




K-30377X-BN

Stages

Shelf Hook

- Dimension 20 x 25 x 40 mm.
- Solid metal construction.
- Durable Kohler finishes resist corrosion and tarnishing.
- For mounting with Stages frame only.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Stages

Holder 300 mm

- Dimension 300 x 120 x 18 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.

Dimensions are appro Unit: mm






Stages

Holder 150 mm

- Dimension 150 x 120 x 18 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.


Dimensions are approximate Unit: mm





Stages Tray 300 mm

- Dimension 300 x 119 x 9 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.






Stages

Tray 260 mm

- Dimension 260 x 119 x 9 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.






Stages

Tray 150 mm

- Dimension 150 x 119 x 9 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Stages

Tray 110 mm

- Dimension 110 x 119 x 9 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Stages

Container 150 mm

- Dimension 150 x 119 x 54 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.

Dimensions are approximate Unit: mm



Note: The recommended dimension for installation can be adjusted according to user preferences and layout




Stages

Container 75 mm

- Dimension 75 x 119 x 54 mm.
- Environmentally friendly plastics ABS engineering materials, sturdy and durable.
- User-friendly design easy to install and disassemble, and can be used repeatedly.

Dimensions are approximate Unit: mm




Strayt™ **Bathroom Accessories**



Strayt

18" Towel Bar

- Dimension 489 x 71 x 24 mm.
- Brass construction.
- Includes installation hardware.






K-9123X-CP

Strayt 24" Double Towel Bar

- Dimension 642 x 142 x 24 mm.
- Brass construction.
- Includes installation hardware.

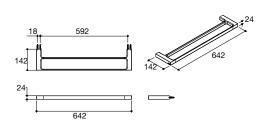




Strayt

24" Double Towel Shelf

- Dimension 642 x 240 x 111 mm.
- Brass construction.
- Includes installation hardware.

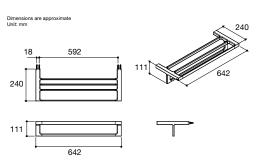




Strayt

Covered Toilet Tissue Holder

- Dimension 162 x 137 x 90 mm.
- Brass construction.
- Includes installation hardware.






Strayt Double Robe Hook

- Dimension 84 x 60 x 42 mm.
- Brass construction.
- Includes installation hardware.

Dimensions are approximate Unit: mm




Note: The recommended dimension for installation can be adjusted according to user preferences and layout



Strayt

Robe Hook

- Dimension 38 x 60 x 38 mm.
- Brass construction.
- Includes installation hardware.




Note: The recommended dimension for installation can be adjusted according to user preferences and lavout.



Strayt Toilet Tissue Holder

- Dimension 162 x 90 x 24 mm.Brass construction.
- Includes installation hardware.









K-77748T-4-CP

Invisible Sensor Technology


Malleco

Touchless Kitchen Faucet

- Spout reach: 230 mm.
- Spout height: 239 mm.
- Solid metal construction.
- 2 functon pull-out spray head.
- Magnetic docking system, smoothly glides and securely locks the sprayhead into place.
- Use with batteries AA for easy installation.




Scan for Video

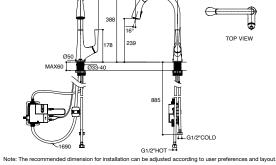








Dimensions are approximate Unit: mm



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



• Hands-free and convenient.



• 2-function pullout spray head.



• Touchless technology responds in milliseconds.



• Use with batteries AA for easy installation.



 DockNetic™. Glides smoothly and securely locks into place with magnets.



• Heat resistant to 82°C




Taut


Touchless Kitchen Faucet



Touchless Kitchen Faucet

- Spout reach: 182 mm.
- Spout height: 233 mm.Brass construction.
- Flexible G1/2" supply hoses for easy installation.
 Faucet spout swivel 360 degree.
- Use with batteries AA for easy installation.





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)








Easy Installation




Atom

Pull-Down Kitchen Faucet Upright Handle

- Spout reach: 212 mm.
- Spout height: 212 mm.
- Brass construction.
- 2-functon pull-down spray head.
- Faucet spout swivel 360 degree.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Taut

Pulldown Spray Kitchen Faucet

- Spout reach: 222 mm.
- Spout height: 208 mm.
- Brass construction.
- 2 function pulldown spray with heat-resistant up to 82°C nylon hose.
- 360° rotating spout.

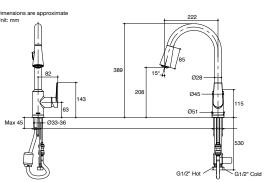

ote: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)






K-13963T-C4-CP




Elate

Pullout Spray Kitchen Faucet

- Spout reach: 228 mm.
- Spout height: 258 mm.
- Brass construction.
- 2 function pullout spray.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



Purist

Semi-pro Kitchen Faucet


- Spout reach: 254 mm.
- Spout height: 212 mm.
- Solid metal construction.
- 2-function pull-out spray head.

Pullout Kitchen FaucetSpout reach: 221 mm.Spout height: 257 mm.


Brass construction.

Pullout spray.


 Magnetic docking system, securely locks the sprayhead into place.

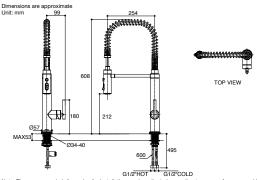


Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate, (1 gallon = 3,785 liters, 1 bar = 14.5 ps



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-99175T-4-CP

K-21366T-4-CP


Taut

Pulldown Spray Kitchen Faucet

- Spout reach: 222 mm.
- Spout height: 208 mm.
- Brass construction.
- 2 function pulldown spray.

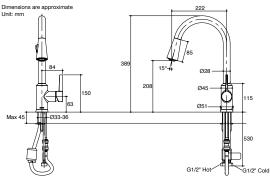

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-8691X-CP

Soleo

Kitchen Faucet

- Spout reach: 205 mm.
- Spout height: 130 mm.
 Brass construction.
- Pullout spray.






K-25980T-4-CP


Atom

Swivel Kitchen Faucet Upright Handle
• Spout reach: 212 mm.

- Spout height: 225 mm.Brass construction.
- Faucet spot swivel 360 degree.



tion can be adjusted according to user prefe




Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




Taut

Kitchen Faucet

- Spout reach: 178 mm.Spout height: 246 mm.
- Brass construction.
- 360° rotating spout.



Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-21370T-4-CP

Taut

Swing Spout Kitchen Faucet

- Spout reach: 178 mm.Spout height: 246 mm.
- Brass construction.

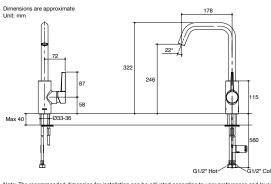



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)





K-99480T-4-CP

Kumin

Kitchen Faucet

- Spout reach: 227 mm.Spout height: 221 mm.
- Solid metal construction.360° swivel spout.

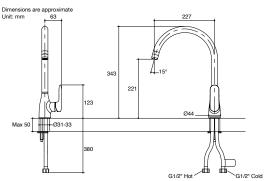



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)




K-15609X-4-CP


Elate

Kitchen Faucet

- Spout reach: 210 mm.Spout height: 229 mm.
- Brass construction.

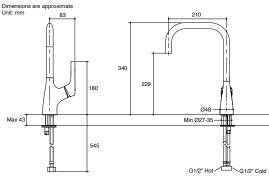

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







Taut

Cold Only Kitchen Faucet

- Spout reach: 178 mm.Spout height: 246 mm.
- Brass construction.

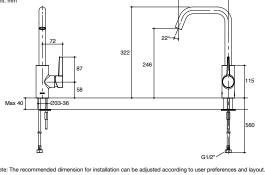



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







Taut

Cold Only Kitchen Faucet

- Spout reach: 182 mm.
- Spout height: 232 mm.
- Brass construction.
- Concealed, easy-clean aerator and key.





Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)







Kumin

Cold Only Kitchen Faucet

- Spout reach: 227 mm.Spout height: 221 mm.
- Solid metal construction. 360° swivel spout.

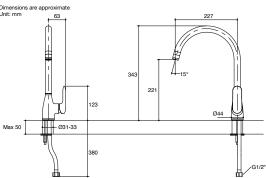



Note: The recomm ended dimension for installation can be adjusted according to user preferences and layout.



Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)



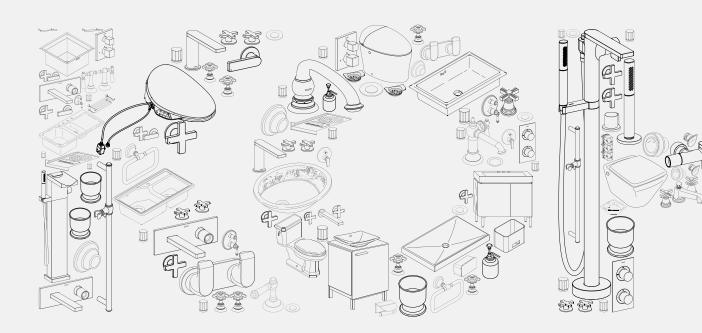

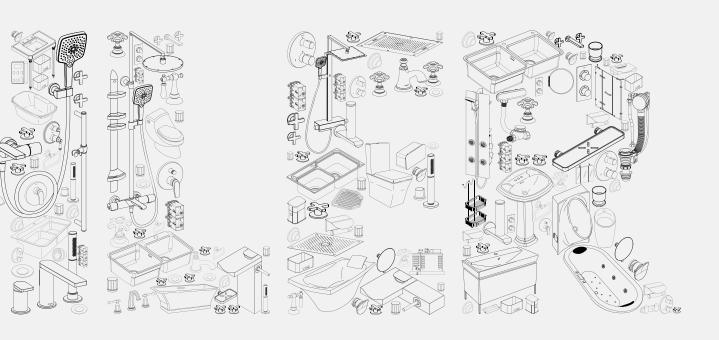



Kohler (Thailand) Public Company Limited 16th Floor, Jasmine City Building, 2 Soi Sukhumvit 23, Sukhumvit Road, Klongtoey Nua, Wattana, Bangkok 10110, Thailand Tel.+66 (0) 2 204 6000 Call Center +66 (0) 2 204 6222 e-mail: callcenterthailand@kohler.com www.kohler.co.th © 2024 by Kohler Co.

