Accord®

A KOHLER COMPANIO 0" smooth bath/shower w/Aging in Place backerboards

71240126

Features

- 15" apron.
- Snap-together modular design.
- Smooth, high-gloss walls.
- Four corner shelves.
- Aging in Place backerboards.

Material

Made from solid Vikrell® material for strength, durability, and lasting beauty.

Installation

- Alcove.
- Right drain.
- Caulk-free installation.

Recommended Products/Accessories

K-23726 Drain treatment K-23733 Vikrell® cleaner

Included Components

Product consists of:

71244106 60" smooth wall set with Aging in Place backerboards 71141126 60" x 30" bath with Aging in Place backerboard



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 HUD, UM Bulletin 73

Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	KOHLER Biscuit

Accord®

A KOHLER COMPANIED Smooth bath/shower w/Aging in Place backerboards

71240126

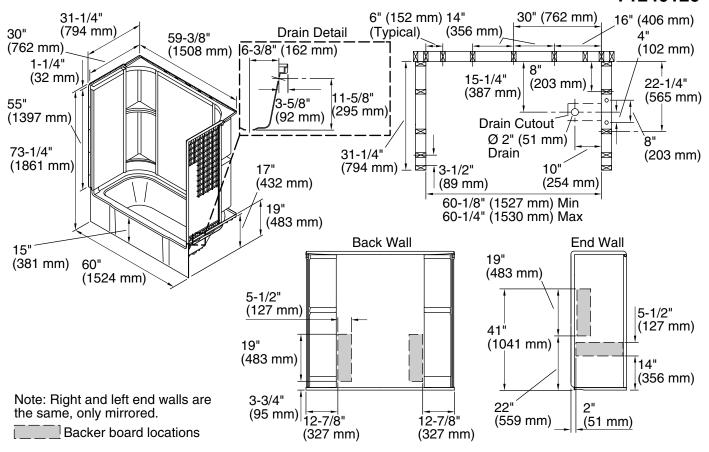

Technical Information

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Right

Basin area, bottom: 46-1/4" x 20-1/2" (1175 mm x 521 mm)
Basin area, top: 52-1/4" x 22-1/2" (1327 mm x 572 mm)

Water depth: 11" (279 mm)

Water capacity: 34 gal (128.7 L)

Minimum flat for door: 2-3/4" (70 mm)

Maximum door height: 56-1/2" (1435 mm)

Maximum door width: 56-3/4" (1441 mm)

Notes

Install this product according to the installation instructions.

Product is designed to be used with a single-handle mixer valve with an escutcheon cover not to exceed 7-3/4" (197 mm) in width. Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown. Bath cannot be installed without the wall surround.

Attach grab bars at the specified backerboard locations only.

Width of back wall at the top transitions from 60" (1524 mm) at the front to 59-3/8" (1508 mm) in the back corners. Furring strips approximately 1/4" (6 mm) thick should be used at the back corner studs if drywall is to be installed over the nailing flange.