




Tier 2 EPA-Certified for Stationary Emergency Applications

Ratings Range

		60 Hz
Standby:	kW	2330-2500
	kVA	2913-3125

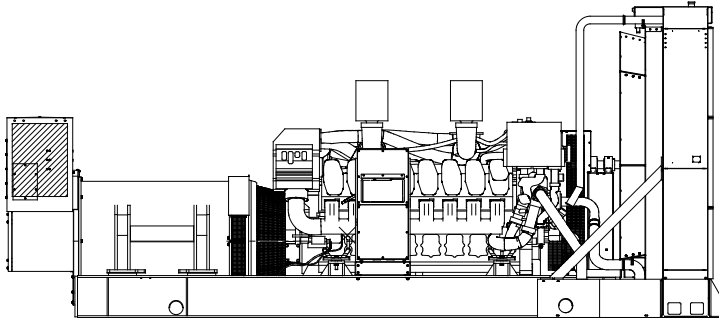

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- The generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- A standard one-year limited warranty covers all generator set systems and components. Two-, five-, and ten-year extended limited warranties are also available.
- Alternator features:
 - The pilot-excited, permanent magnet (PM) alternator provides superior short-circuit capability.
 - The brushless, rotating-field alternator has broadrange reconnectability.
- Other features:
 - Kohler designed controllers for guaranteed system integration and remote communication. See Controllers on page 3.
 - The low coolant level shutdown prevents overheating (standard on radiator models only).
 - Electronic engine controls manage the engine.

Generator Set Ratings

Alternator	Voltage	Ph	Hz	130°C Rise Standby Rating	
				kW/kVA	Amps
10M1102	277/480	3	60	2500/3125	3759
10M1106	277/480	3	60	2500/3125	3759
10M1122	347/600	3	60	2500/3125	3007
10M1124	347/600	3	60	2500/3125	3007
10M1180	2400/4160	3	60	2500/3125	434
10M1182	2400/4160	3	60	2500/3125	434
	7200/12470	3	60	2500/3125	145
10M1248	7620/13200	3	60	2500/3125	137
	7970/13800	3	60	2330/2913	122
	7200/12470	3	60	2500/3125	145
10M1252	7620/13200	3	60	2500/3125	137
	7970/13800	3	60	2500/3125	131

RATINGS: All three-phase units are rated at 0.8 power factor. *Standby Ratings:* The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. *Prime Power Ratings:* At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

Specifications	Alternator
Type	4-Pole, Rotating-Field
Exciter type	Brushless, Permanent-Magnet
Voltage regulator	Solid State, Volts/Hz
Insulation:	NEMA MG1
Material	Class H, Synthetic, Nonhygroscopic
Temperature rise	130°C Standby
Bearing: quantity, type	2, Sealed
Coupling	Flexible Coupling
Amortisseur windings	Full
Rotor balancing	125%
Voltage regulation, no-load to full-load (with <0.5% drift due to temp. variation)	3-Phase Sensing, ±0.25%
One-step load acceptance	100% of Rating
Unbalanced load capability	100% of Rated Standby Current
Peak motor starting kVA @ 0.3 PF:	(35% dip for voltages below)
480V 10M1102 (4 bus bar)	5650
480V 10M1106 (4 bus bar)	6750
600V 10M1122 (4 bus bar)	6300
600V 10M1124 (4 bus bar)	7100
4160V 10M1180 (6 lead)	7200
4160V 10M1182 (6 lead)	6400

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Superior voltage waveform from two-thirds pitch windings and skewed stator.
- Digital solid-state, volts-per-hertz voltage regulator with ±0.25% no-load to full-load regulation.
- Brushless alternator with brushless pilot exciter for excellent load response.

Peak motor starting kVA @ 0.3 PF:	(35% dip for voltages below)
12470V 10M1248 (6 lead w/4 bus bar)	5250
13200V 10M1248 (6 lead w/4 bus bar)	5800
13800V 10M1248 (6 lead w/4 bus bar)	6250
12470V 10M1252 (6 lead w/4 bus bar)	5500
13200V 10M1252 (6 lead w/4 bus bar)	6000
13800V 10M1252 (6 lead w/4 bus bar)	6500

Application Data

Engine

Engine Specifications	
Manufacturer	Detroit Diesel/MTU
Engine: model	16V4000G83L
Engine: type	4-Cycle, Turbocharged, Intercooled
Cylinder arrangement	16V
Displacement, L (cu. in.)	76.3 (4656)
Bore and stroke, mm (in.)	170 x 210 (6.7 x 8.3)
Compression ratio	16.4:1
Piston speed, m/min. (ft./min.)	756 (2480)
Rated rpm	1800
Max. power at rated rpm, kWm (BHP)	2740 (3675)
Cylinder head material	Cast Iron
Crankshaft material	Forged Steel
Valve (exhaust) material	High Alloy Steel
Governor: type, make/model	ADEC Electronic Control
Frequency regulation, no-load to full-load	Isochronous
Frequency regulation, steady state	±0.25%
Frequency	Fixed
Air cleaner type, all models	Dry

Engine Electrical

Engine Electrical System	
Battery charging alternator:	
Ground (negative/positive)	Negative
Volts (DC)	24
Ampere rating	70
Starter motor rated voltage (DC)	Dual, 24
Battery, recommended cold cranking amps (CCA):	
Quantity, CCA rating each	Four, 1150
Battery voltage (DC)	12

Fuel

Fuel System	
Fuel supply line, min. ID, mm (in.)	20 (0.79)
Fuel return line, min. ID, mm (in.)	20 (0.79)
Max. fuel flow, Lph (gph)	1200 (317)
Min./max. fuel pressure at engine supply connection, kPa (in. Hg)	-10/50 (-3/15)
Max. return line restriction, kPa (in. Hg)	50 (14.7)
Fuel filter	1, Secondary
Recommended fuel	#2 Diesel

Exhaust

Exhaust System	
Exhaust manifold type	Dry
Exhaust flow at rated kW, m ³ /min. (cfm)	600 (21189)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	515 (959)
Maximum allowable back pressure, kPa (in. Hg)	8.5 (2.5)
Exhaust outlet size at engine hookup, mm (in.)	2 @ 251 (9.88)

Lubrication

Lubricating System	
Type	Full Pressure
Oil pan capacity, dipstick mark max., L (qt.)	240 (254)
Engine oil capacity, initial filling, L (qt.)	300 (317)
Oil filter: quantity, type	4, Spin-On
Oil cooler	Water-Cooled

Application Data

Cooling

Radiator System	
Ambient temp., standby rating, °C (°F)	40 (104)
Engine water capacity, L (gal.)	175 (46)
Radiator system capacity, including engine, L (gal.)	717 (189)
Engine jacket water flow, Lpm (gpm)	1350 (356)
Charge cooler water flow, Lpm (gpm)	583 (154)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	1115 (63409)
Heat rejected to charge cooling water at rated kW, dry exhaust, kW (Btu/min.)	750 (42652)
Water pump type	Centrifugal
Fan diameter, including blades, mm (in.)	2362 (93)
Fan, kWm (HP)	63 (84)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O)	0.125 (0.5)
High Ambient Radiator System	
Ambient temp., standby rating, °C (°F)	50 (122)
Engine water capacity, L (gal.)	175 (46)
Radiator system capacity, including engine, L (gal.)	742 (196)
Engine jacket water flow, Lpm (gpm)	1350 (356)
Charge cooler water flow, Lpm (gpm)	583 (154)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	1115 (63409)
Heat rejected to charge cooling water at rated kW, dry exhaust, kW (Btu/min.)	750 (42652)
Water pump type	Centrifugal
Fan diameter, including blades, mm (in.)	2743 (108)
Fan, kWm (HP)	86 (116)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O)	0.125 (0.5)
Remote Radiator System†	
Connection sizes:	Class 150 ANSI Flange
Water inlet/outlet, mm (in.)	191 (7.5) Bolt Circle
Intercooler inlet/outlet, mm (in.)	152 (6.0) Bolt Circle
Static head allowable above engine, kPa (ft. H ₂ O)	149 (50)


† Contact your local distributor for cooling system options and specifications based on your specific requirements.

Operation Requirements

Air Requirements	
Radiator-cooled cooling air, m ³ /min. (scfm)‡	2424 (85600)
High ambient radiator-cooled cooling air, m ³ /min. (scfm)‡	3738 (132000)
Cooling air required for generator set when equipped with CWC or remote radiator, based on 14°C (25°F) rise, m ³ /min. (scfm)‡	801 (28300)
Combustion air, m ³ /min. (cfm)	222 (7840)
Heat rejected to ambient air:	
Engine, kW (Btu/min.)	90 (5118)
Generator, kW (Btu/min.)	120 (6830)
‡ Air density = 1.20 kg/m ³ (0.075 lbm/ft ³).	

Fuel Consumption	
Diesel, Lph (gph) at % load	Standby Rating
100%	695.5 (183.7)
75%	514.4 (135.9)
50%	355.8 (94.0)
25%	200.6 (53.0)

Controllers




Decision-Maker® 550 Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities.

- Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-46 for additional controller features and accessories.



Decision-Maker® 6000 Paralleling Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities for paralleling multiple generator sets.

- Paralleling capability with first-on logic, synchronizer, kW and kVAR load sharing, and protective relays
- Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-107 for additional controller features and accessories.

Modbus® is a registered trademark of Schneider Electric.

Standard Features

- Alternator Protection
- Alternator Strip Heater (standard on 3300 volt and above)
- Closed Crankcase Breather System
- Flexible Exhaust Connector, Stainless Steel
- Local Emergency Stop Switch
- Low Coolant Level Shutdown
- Oil Drain Extension
- Operation and Installation Literature
- Radiator Core Guard
- Winding RTDs (standard on 3300 volt and above)

Available Options

Approvals and Listings

- CSA Approval
- IBC Seismic Certification
- UL 2200 Listing

Enclosed Unit

- Sound Enclosure (Contact Factory)
- Weather Enclosure (Contact Factory)

Open Unit

- Exhaust Silencer, Critical (kit: GM30322-KP1)
- Exhaust Silencer, Hospital (kit: GM30321-KP1)

Fuel System

- Flexible Fuel Lines
- Fuel/Water Separator
- Subbase Fuel Tank (Contact Factory)

Controller

- Common Failure Relay
- Communication Products and PC Software
- Customer Connection
(Standard with Decision-Maker® 6000 controller)
- Decision-Maker Paralleling System (DPS)
(Decision-Maker® 6000 controller only) (Contact Factory)
- Dry Contact (One-, Ten-, or Twenty-Relay Options)
- Prime Power Switch
- Remote Audiovisual Alarm Panel
- Remote Emergency Stop
- Remote Mounting Cable (Decision-Maker® 550 controller only)
- Remote Serial Annunciator Panel
- Run Relay

Cooling System

- Block Heater; 12000 W
Recommended for Ambient Temperatures Below 10°C (50°F)
- High Ambient Radiator
- Remote Radiator Cooling Setup

Electrical System

- Alternator Strip Heater (available up to 600 volt)
- Battery
- Battery Charger, 10 Amp. Equalize/Float Type
- Battery Heater
- Battery Rack and Cables
- Line Circuit Breaker (NEMA type 1 enclosure)
- Line Circuit Breaker with Shunt Trip (NEMA type 1 enclosure)

Paralleling System

- Manual Speed Adjustment (Decision-Maker® 550 controller only)
- Manual Voltage Control (Decision-Maker® 550 controller only)
(Contact Factory)
- Remote Voltage Adjust Control (Decision-Maker® 550 only)

Miscellaneous

- Air Cleaner, Heavy Duty
- Air Cleaner Restriction Indicator
- Engine Fluids (oil and coolant) Added
- Rated Power Factor Testing
- Spring Isolators

Literature

- Decision-Maker® Paralleling System (DPS)
- General Maintenance
- NFPA 110
- Overhaul
- Production

Warranty

- 2-Year Basic Limited Warranty
- 5-Year Basic Limited Warranty
- 5-Year Comprehensive Limited Warranty
- 10-Year Major Components Limited Warranty

Other Options

- _____
- _____
- _____

Dimensions and Weights

Overall Size, L x W x H, max., mm (in.):

40°C Radiator 7291 x 2774 x 3138 (287.1 x 109.2 x 123.5)

50°C Radiator 7291 x 3062 x 3299 (287.1 x 120.6 x 129.9)


Weight 40°C Radiator, wet, max., kg (lb.):

23042 (50800)

50°C Radiator

23360 (51500)

Note: See ADV drawing for specific dimensions and weight based on generator selection

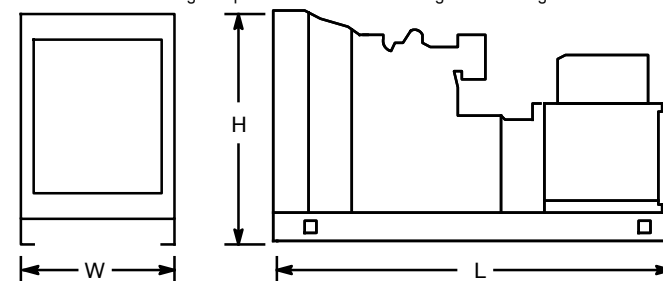

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY: