KOHLER, Faucets

Single-handle bathroom sink faucet, 1.2 gpm K-99760-4

Features

- Single lever handle allows for both volume and temperature control
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- 1.2 gpm (4.5 lpm) maximum flow rate
- Includes metal pop-up drain with 1-1/4" (32 mm) tailpiece
- 4-3/16" (107 mm) spout reach
- Red/blue indexing on handle
- Coordinates with Honesty faucets accessories, and showering components to complete your bathroom

Material

- Brass
- KOHLER® finishes resist corrosion and tarnishing

Installation

- For single-hole installation
- Preattached flexible supply lines simplify installation

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

K-26633 18" towel bar

K-26634 24" towel bar

K-26635 12" towel bar

K-26636 Robe hook

K-26637 Towel arm

K-26638 Pivoting toilet paper holder





Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

IAPMO Certification

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Code	Description
CP	Polished Chrome
BN	Vibrant® Brushed Nickel
BL	Matte Black
2MB	Vibrant® Brushed Moderne Brass
	CP BN BL





Single-handle bathroom sink faucet, 1.2 gpm K-99760-4

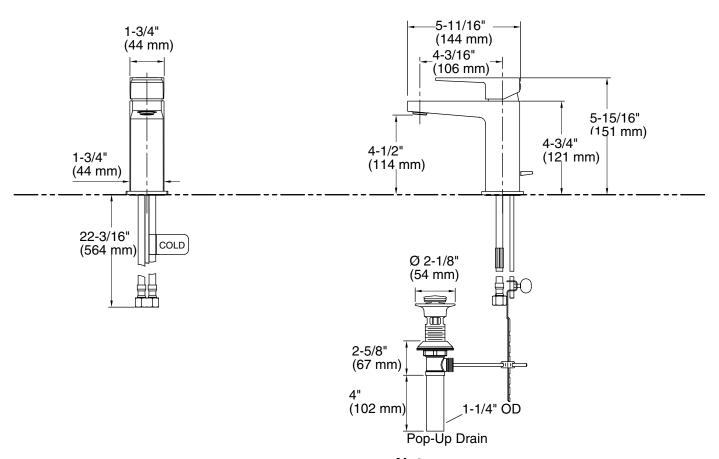

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes
Drain with overflow: Yes

Spout:

Spout reach: 4-3/16" (106 mm)

Notes

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

