KOHLER. Faucets

Kallan®

Widespread bathroom sink faucet, 1.2 gpm

K-R24056-4DL

Features

- Two-handle widespread faucet for 8" - 16" (203 - 406 mm) centers
- Two lever handles offer separate control of hot and cold water
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.2 gpm (4.5 lpm) maximum flow rate
- Coordinates with other products in the Kallan™ collection
- Box includes: Assembled faucet, handles, supply lines, clicker drain, mounting hardware, installation instructions

Material

- Premium material construction for durability and reliability
- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use
- Spot Repel® finish resists fingerprints, smudges, and water spots (Oil-Rubbed Bronze finish only)

Installation

- Widespread
- Simplified faucet installation; mounting hardware requires no special tools
- Handles preassembled on valves and quick-connect fittings simplify installation

Recommended Products/Accessories

K-23726 Drain treatment
K-23723 Faucet cleaner



ADA | CSA B651 | OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC
IAPMO Certification

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	BN	Vibrant® Brushed Nickel

KOHLER. Faucets

Kallan®

Widespread bathroom sink faucet, 1.2 gpm

K-R24056-4DL

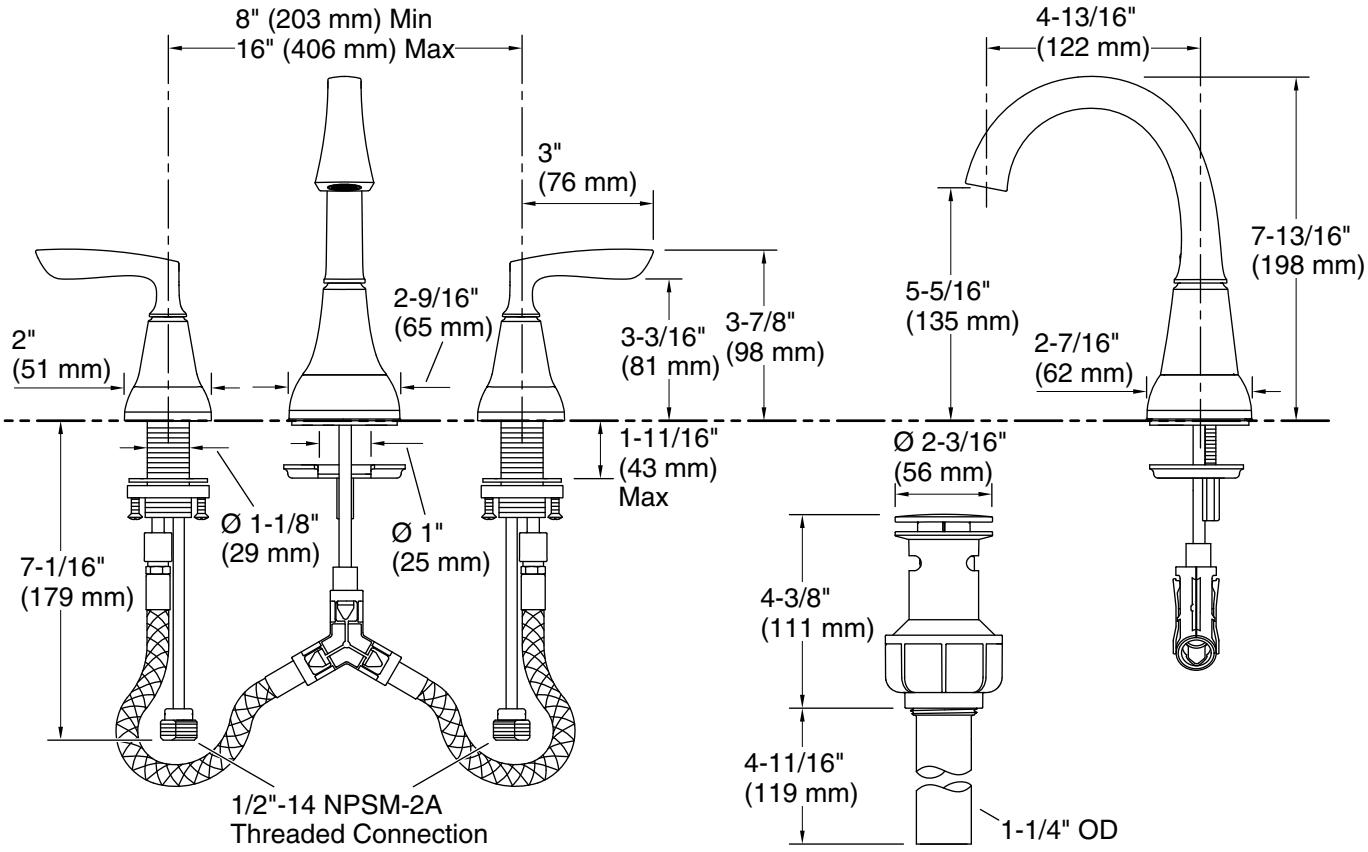

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	Yes

Spout:

Spout reach:	4-13/16" (122 mm)

Notes

ADA complaint for faucet handles only.

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.