

Toobi® Bath and Shower Valve Trim **K-T8975-4**

Features

- Includes valve trim, bath spout, shower arm with flange, and showerhead
- Single lever handle allows for both on/off activation and temperature setting
- 2.0 gpm (7.6 lpm) maximum flow rate
- Integrated push-button diverter
- Coordinates with Toobi faucets, accessories, and showering components to complete your bathroom
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance

Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER[®] finishes resist corrosion and tarnishing

Installation

Trim only; requires valve to complete installation (sold separately)

Required Products/Accessories

K-11748 Series Rite-Temp® Valves

Recommended Products/Accessories

1151968 Service Kit K-23723 Faucet cleaner





Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® IAPMO Certification


KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.



KOHLER, Faucets

Toobi® Bath and Shower Valve Trim **K-T8975-4**

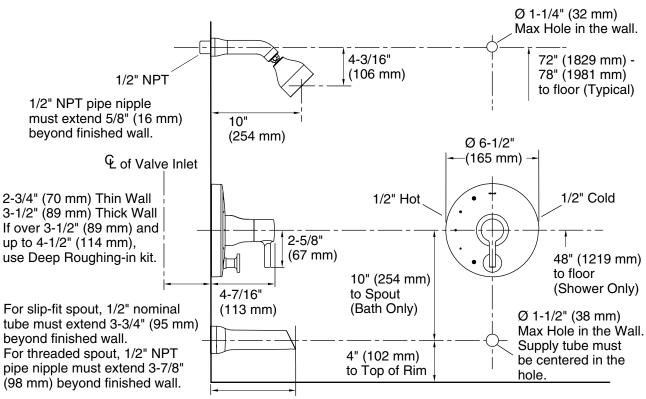

6-3/4" (171 mm)

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 6-3/4" (171 mm)

Showerhead/Body Spray:

Rated maximum	2 gal/min (7.6 l/min)
flow:	
Pressure:	80 psi (5.5 bar)

Notes

For use with automatic compensating valves rated at 1.7 gal/min (6.4 l/min) or less. Install this product according to the installation

guide. Install Rite-Temp valve according to valve

installation guide.

NOTICE: Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Avoid cross-flow conditions. Do not install shutoff device on either valve outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between valve and wall-mount spout.

