

DTV+ Quick Start

Guide to Using DTV+ Quick Start


The DTV+ Quick Start software has been introduced to simplify the initial setup of the digital shower valves. This allows the installer to quickly complete the basic valve setup and system configuration and testing.

Important Notes:


1.	Quick Start can be used for any custom shower design or DTV+ Spa configuration installation.
2.	For Spa configurations (configurations A to E), the valve outlets must be connected to the terminal fittings exactly as indicated in the installation instructions. (See Attached Plumbing Layouts for Each Configuration)
3.	Quick Start will only configure the shower valve outlet setup. All other settings must be completed through the embedded web pages.
4.	In Spa configurations, certain valve combinations do not use all available valve outlets (these can be used for additional applications outside the Spa experiences). These outlets must be configured via the embedded web pages.
5.	After Quick Start is completed, the digital valves will be configured and the system can be operated to complete testing. If corrections are required, Quick Start can be accessed via the settings icon.

DTV+ Quick Start


Example: Custom Configuration With Six Port Valve

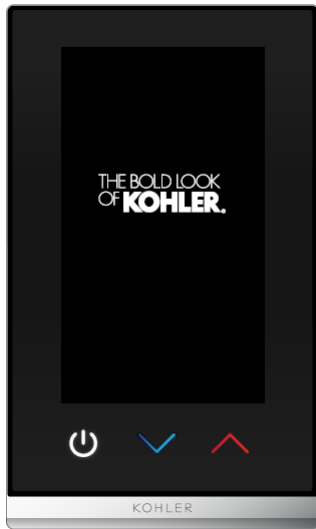


Press Power icon

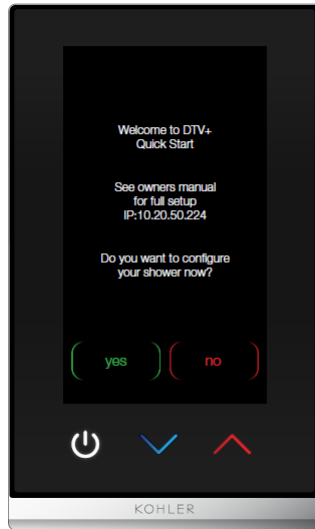

Select Yes to start Quick Start

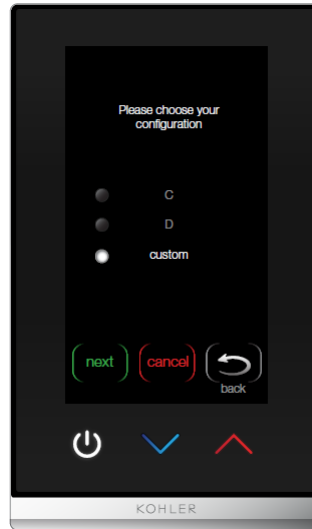


Configuration options for connected valve/s. Select Custom. Select Next

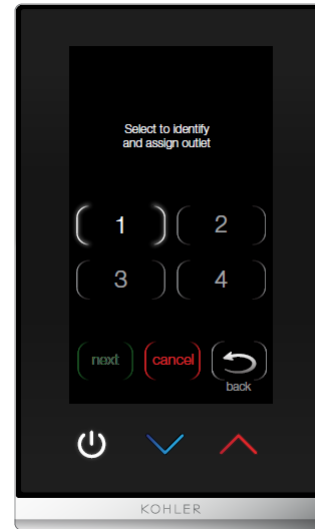


Select valve outlet 1. Select next.




Option to run water for 5 seconds to identify outlet. Select Yes or No.

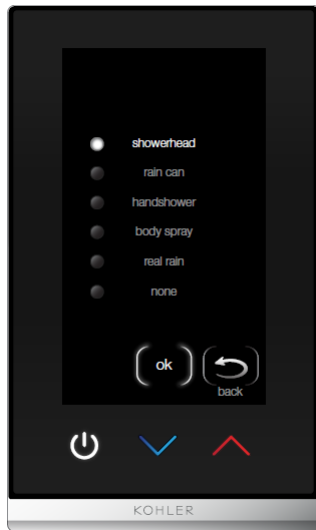


Select appropriate description for outlet. Select Ok

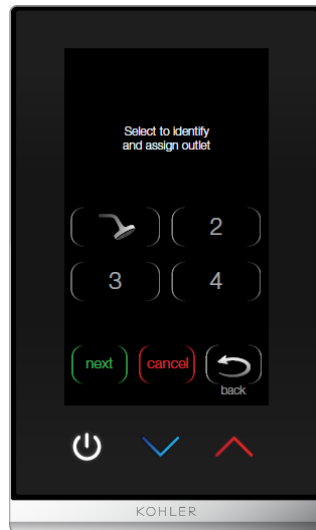


Outlet populated with icon. Repeat for outlets 2 – 4.

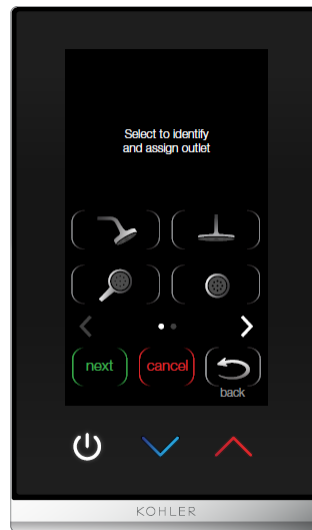

If more than four outlets, press arrow to move to second page.

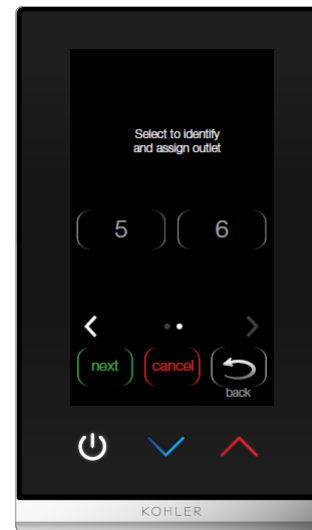


Complete selection sequence for remaining outlets.

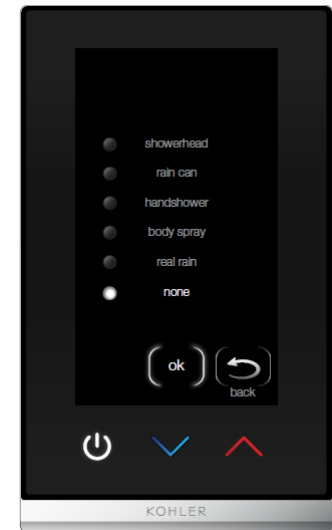


For any unused valve outlets, select none

DTV+ Quick Start


Example: Custom Configuration With Six Port Valve

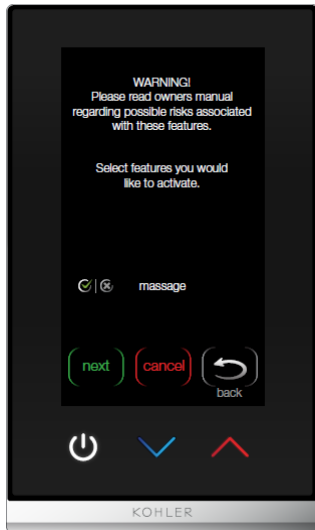


Select desired features to activate them. Select Next.

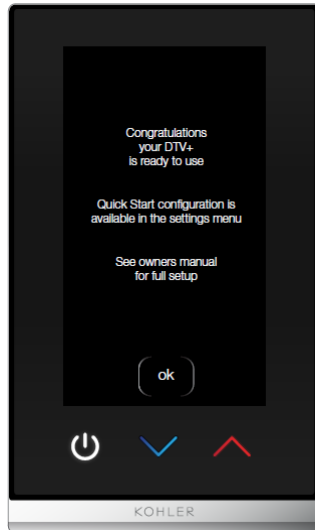

Quick Start sequence completed. Press Ok to return to home screen.

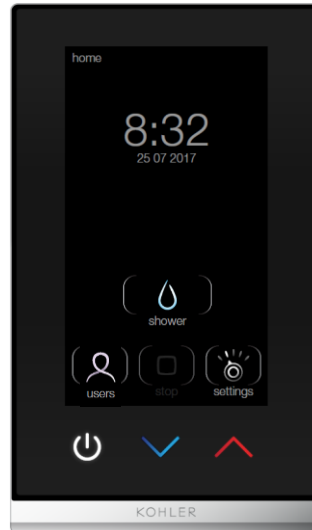

Home screen. To edit Quick Start settings, Select Settings

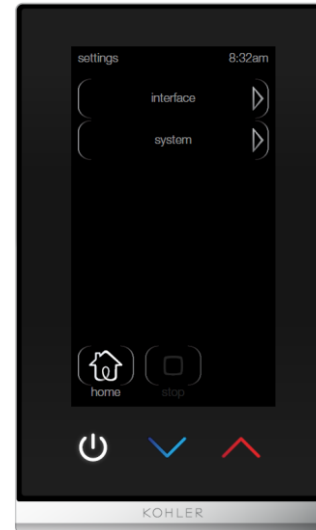


Select System




Select Quick Start. Initial settings are displayed and can be edited.

DTV+ Quick Start


Example: Spa Configuration A – With Two Six Port Valves

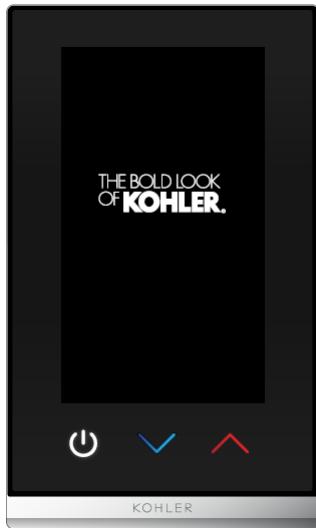


Press Power icon

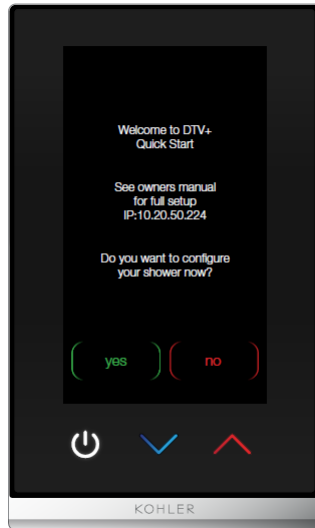

Select Yes to start Quick Start

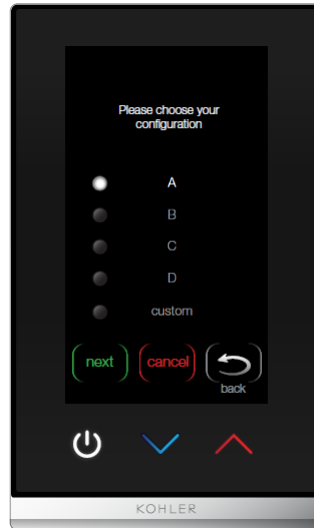


Configurations options for connected valves. Select config 'A'. Select Next.

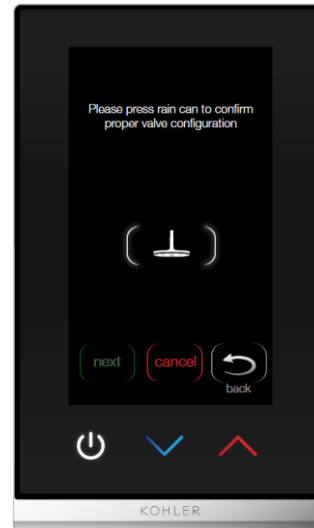


Only appears when two valves are the same. Press rain can icon. Select Next




If No selected, system swaps valves and repeats question. Select Next.

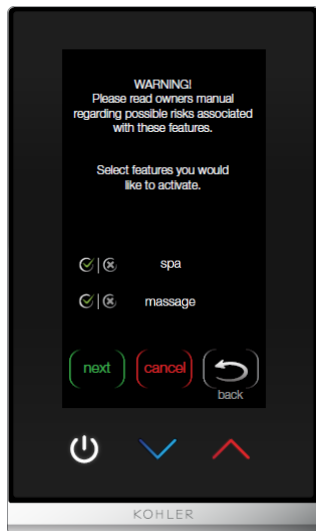


Select desired features to activate them. Select Next.

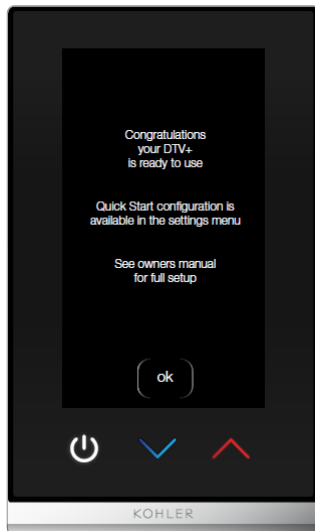

Quick Start sequence completed. Press Ok to return to home screen.

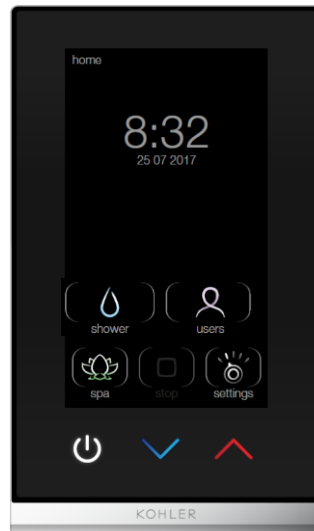

Home screen. To edit Quick Start settings, Select Settings

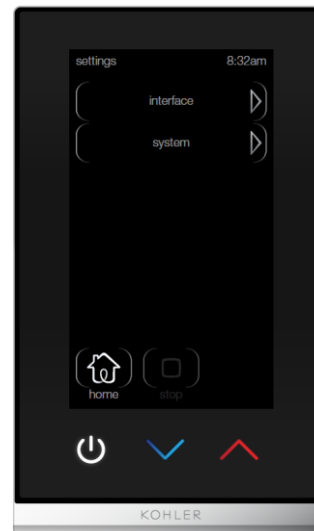

Select System



Select Quick Start. Initial settings are displayed and can be edited.

What Can / Can't Be Set-Up with Quick Start

What Can Be Set-Up


- Custom Shower Set Up
- Spa Configurations A-E
 - Configuration E Requires 99695-E-NA System Controller
- Enable Settings
 - Shower
 - Steam
 - Massage

What Can't Be Set-Up

- Lighting
- Music
- Steam
- Default Temperatures
- User Presets Naming

CUSTOM Configuration – Plumbing Layout


Example Custom Plumbing Layout

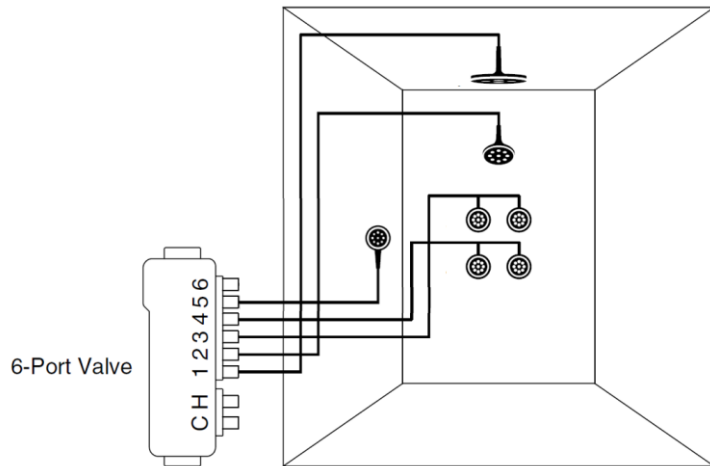


1. A custom plumbing configuration is ANY plumbing configuration other than a SPA configuration (A – E).
2. A custom configuration may have one or two valves (any combination).
3. With a custom configuration, each outlet must be individually identified and selected.

SPA Configuration A – Plumbing Layouts

Configuration A - Plumbing Layout 1

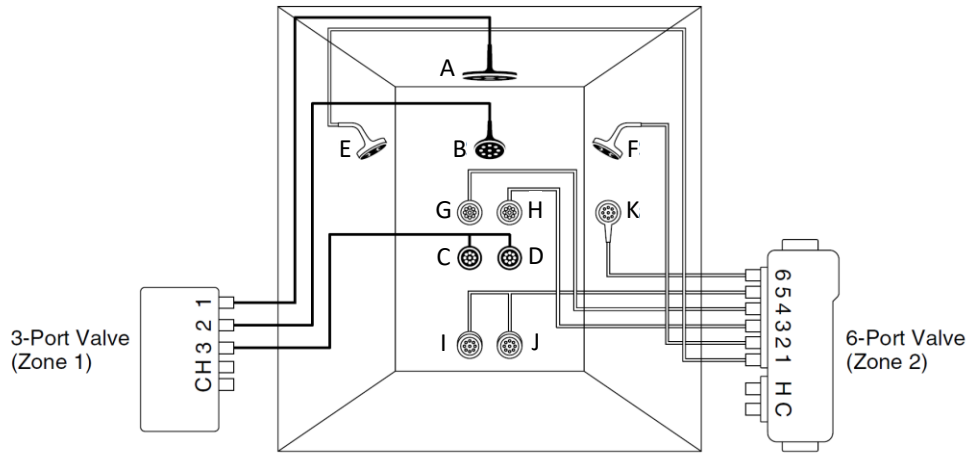


Configuration A - Plumbing Layout 2

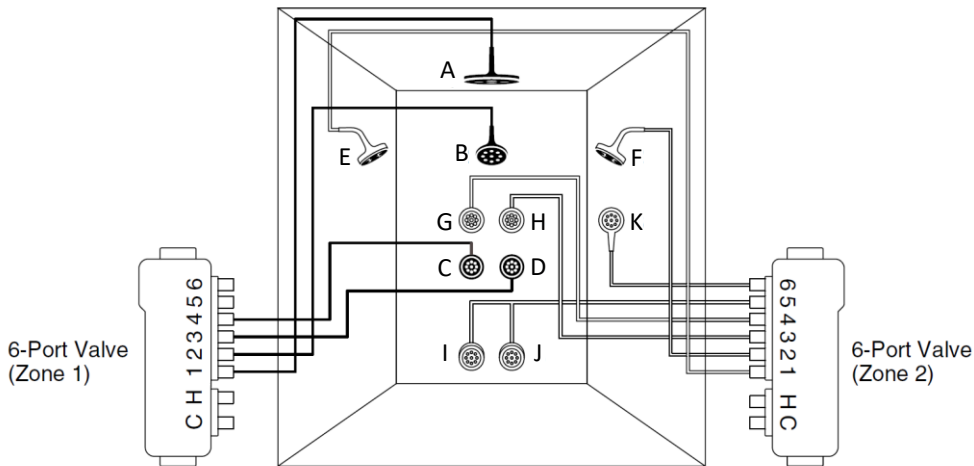


SPA Configuration B – Plumbing Layouts


Configuration B - Plumbing Layout 1

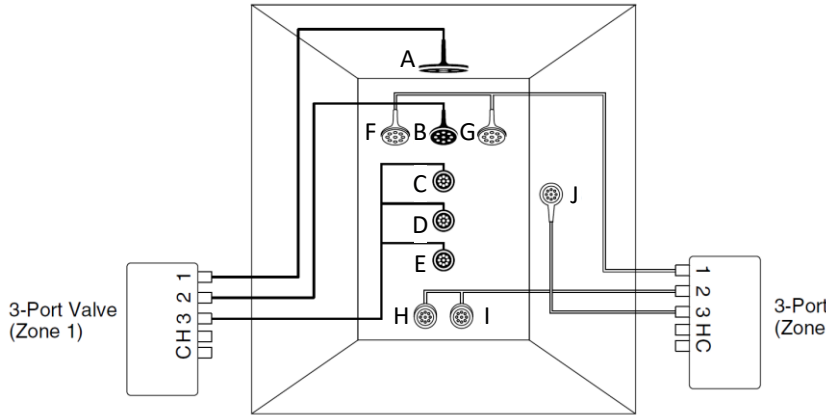

Configuration B - Plumbing Layout 3

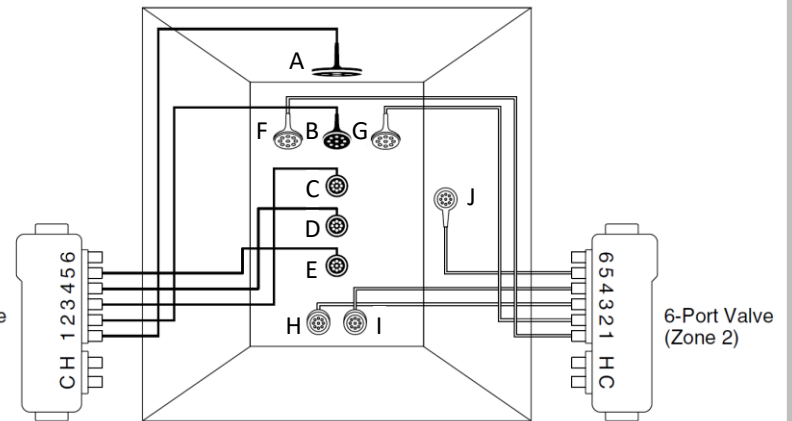


Configuration B - Plumbing Layout 2

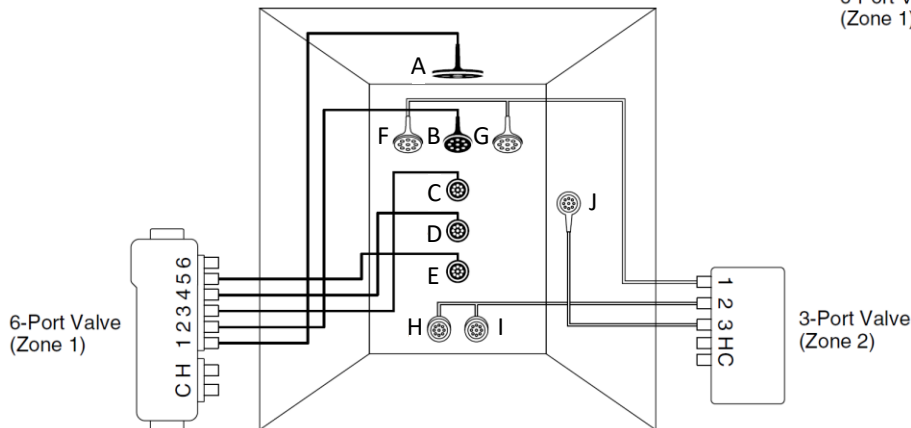



SPA Configuration C – Plumbing Layout

Configuration C - Plumbing Layout

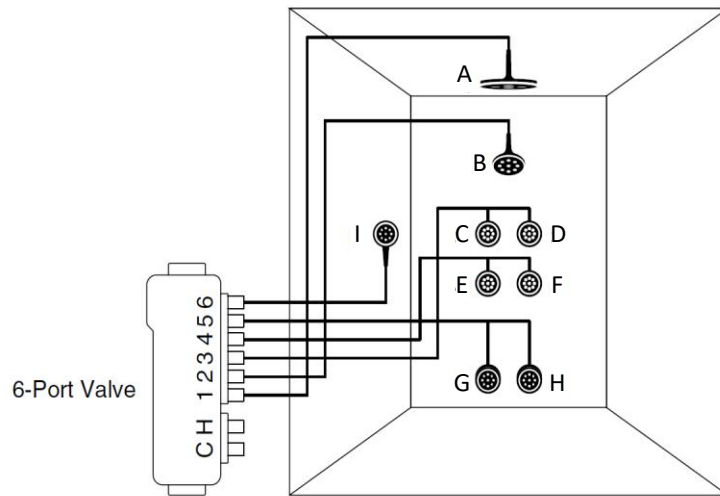


SPA Configuration D – Plumbing Layout

Configuration D - Plumbing Layout

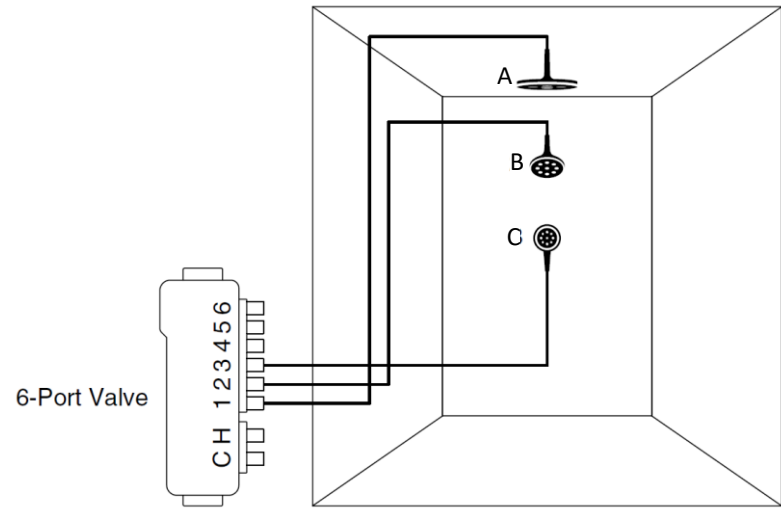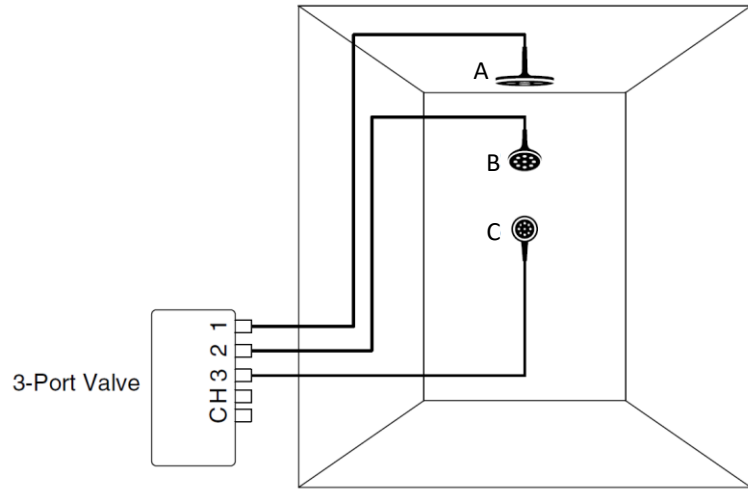

SPA Configuration E – Plumbing Layout

Configuration E - Plumbing Layout

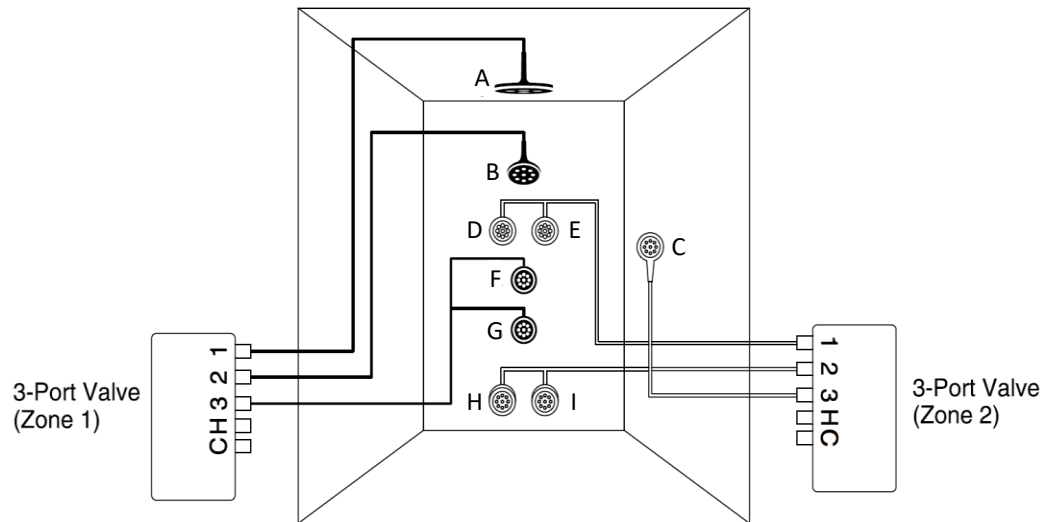

DTV+ Quick Start

The following Firmware and Graphic files represent the latest DTV+ Quick Start Software.

This can be found by plugging in the DTV+ Interface, going to System > About:

FIRMWARE: 0.0.3.60

GRAPHICS: 0.0.7.27